# PASTRY


**600x400 COUNTERS** **Model: TAPBT/10** **Code: 42040001**

*LABOR*

EN FREEZER COUNTER - Freezer pastry counter suitable for 600x400 trays.

- Construction: made in stainelss steel
- Internal capacity: 600x400 mm racks
- Position of technical compartment: on right side
- Refrigeration type: refrigeration system HSS "Helped Static System"
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Supply with: 7 pair of runners





Technical Data:

| | | |
|---|---|---|
| Body Height | mm | 710 |
| Doors | nr | 1 |
| Capacity (net) | l | 135 |
| Capacity (gross) | l | 195 |
| Capacity of trays/shelves | mm | 7 600x400 |
| External dimensions (WxDxH) | cm | 105 x 80 x 90 |
| Insulation thickness | mm | 50 |
| Tray pitch | mm | 37,5 |
| Rack positions | nr | 13 |
| Stainless steel top thickness | mm | 15/10 H 40 |
| Top type | | AISI 304 normal |
| Evaporators | nr | 1 |
| Standard lock | | NO |
| Standard light | | NO |
| Temperature | °C | -15/-20°C |
| Condensing unit | | plug-in unit |
| Gas | | R290 |
| Ventilation control | | NO |
| Humidity control | | NO |
| Max abs. power | W | 455* |
| Cooling power | W | 485** |
| Input voltage | | 1x230V ~ 50Hz |
| Energy efficiency class | | D |
| Energy consumption kWh/24h | kWh/24h | 5,8 |
| Energy consumption kWh/year | kWh/year | 2127 |
| Energy efficiency index | | 67,1 |
| Climate class | | 5 |
| Packaging dimensions (WxDxH) | cm | 170 x 96 x 110 |
| Volume (gross) | mc | 1,8 |
| Net weight | kg | 83 |
| Gross weight | kg | 98 |

*Evap. -10°C, Cond. +45°C / **Evap. -23,3 Cond. +54,4°C

DETAILS:




Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)




Body H710 mm



Stainless steel h 40 mm worktops reinforced and made with 15/10 sheet metal




Stainless steel construction with 50mm insulation thickness




Digital touch thermostat



40x60 cm trays



Racks with easily removable guides featuring 13 positions (37,5 mm pitch)



Internal cell probe for constant temperature monitoring



Evaporators with cataphoresis treatment and electronic fans



Stainless steel back finish



Adjustable stainless steel feet




RAL color finish (on request)

ACCESSORIES:


| | | |
|---|---|---|
|  | Rilsan cm 60x40 shelf | 45020550 |
|  | Pair of runners for 60x40 cm trays | 20808031 |
|  | Stainless steel cm 40x60x2h tray | 42000560 |
| | Stainless steel cm 40x60x3h tray | 42000562 |
|  | Set of no. 4 Ø 125 castors | 40200530 |
|  | LED light for 1 door (counter), overprice | 40203005 |
|  | Wi-Fi supervising system (overprice) | 45000565 |
|  | 60Hz frequency | 40200560 |

INSTALLATION DIAGRAM:

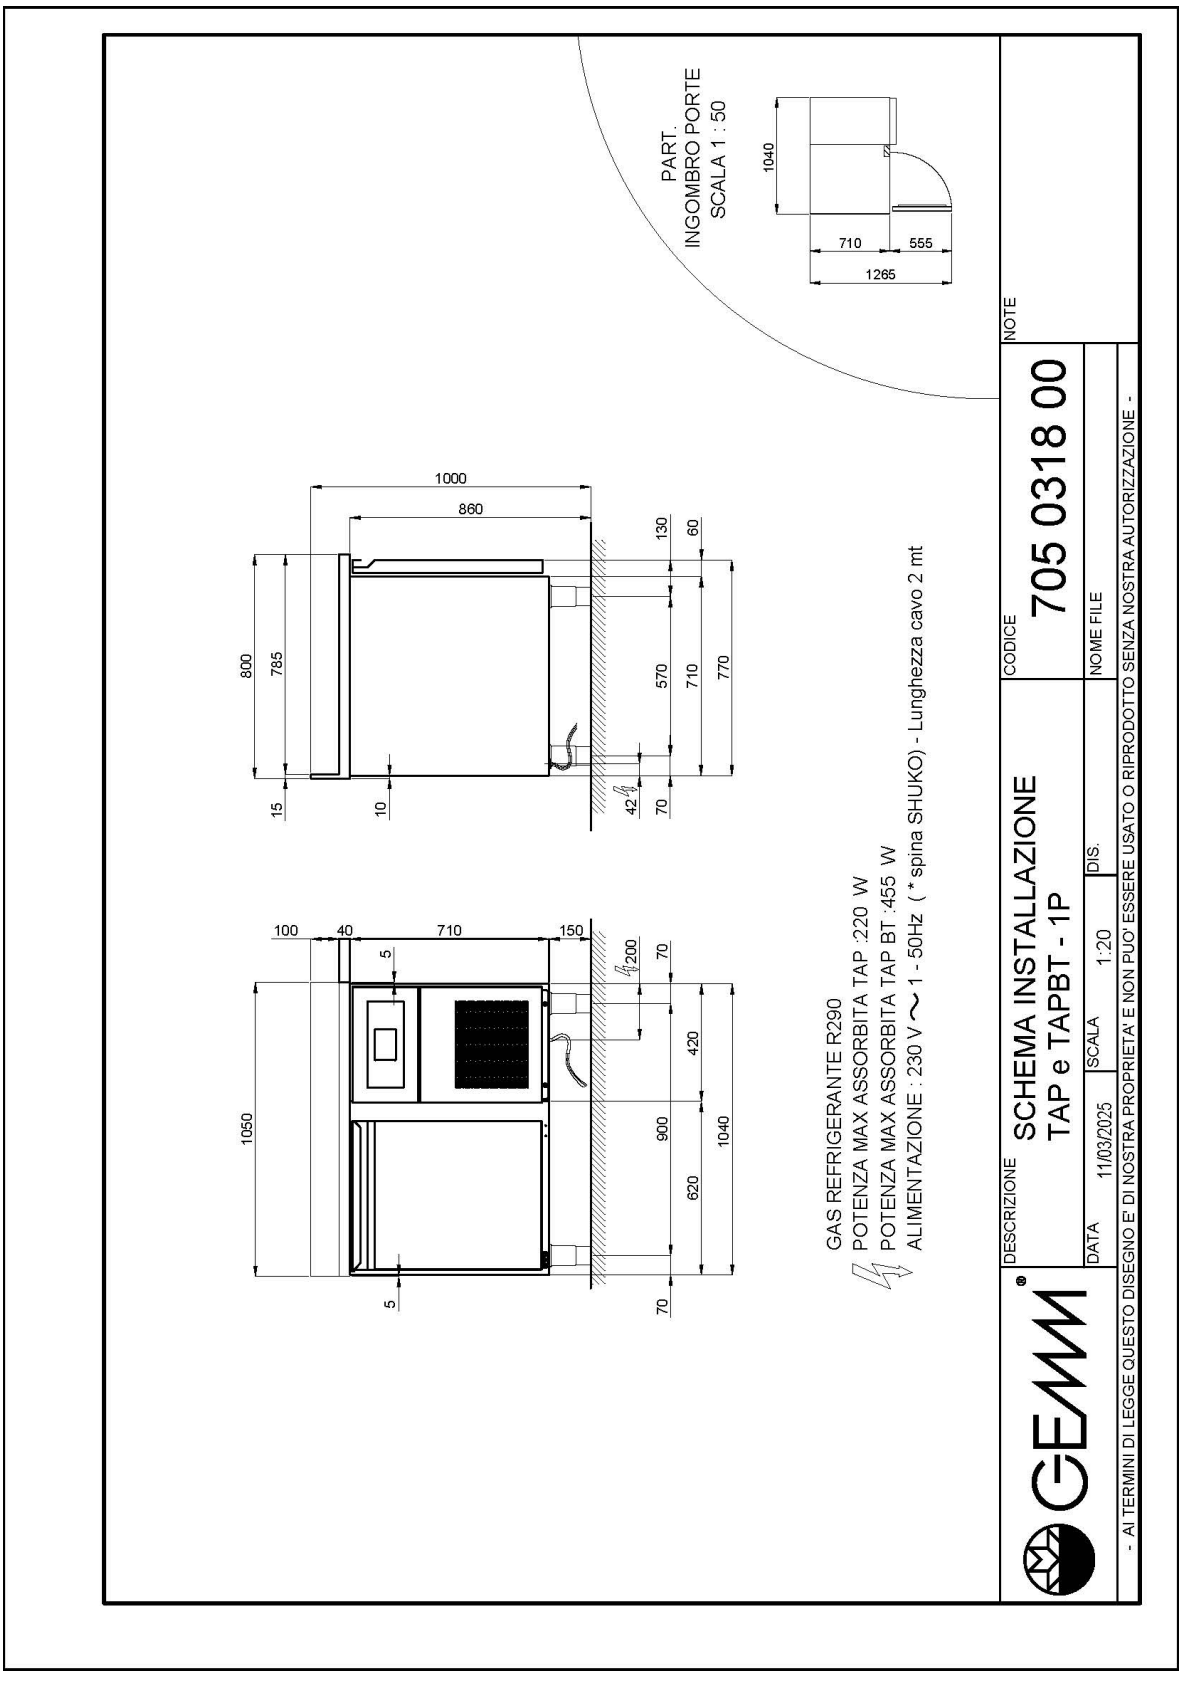


TAPBT/10

ECOLABEL:

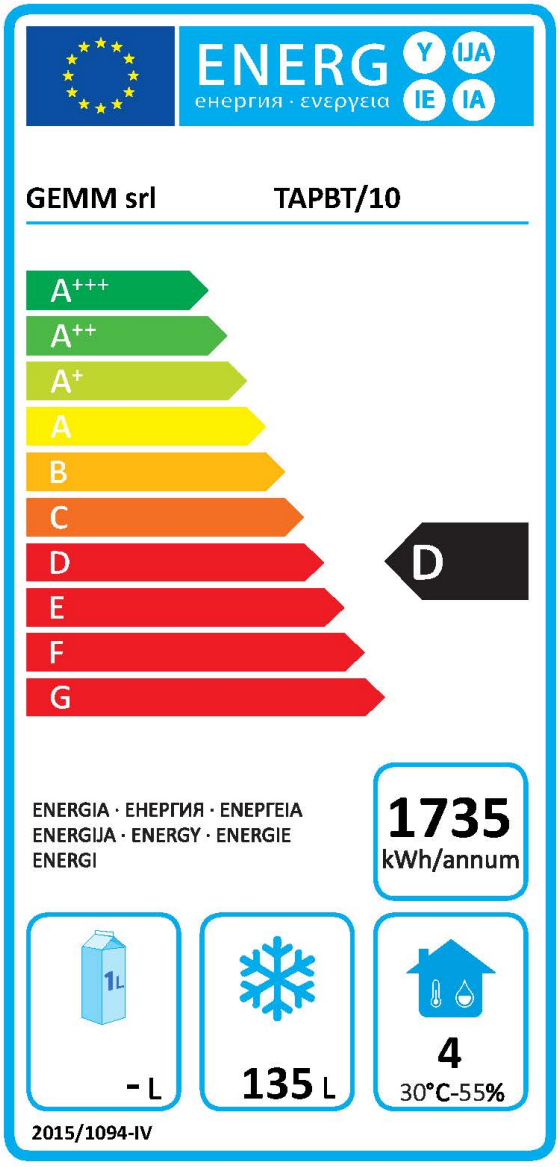
ENERG
енергия · ενεργεια
Y
IJA
IE
IA
GEMM srl
TAPBT/10
A+++
A++
A+
A
B
C
D
E
F
G
D
ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ
ENERGIJA · ENERGY · ENERGIE
ENERGI
1735
kWh/annum
1L
- L
135 L
4
30°C-55%
2015/1094-IV