

## RETARDER PROOFING

**600x400 COUNTERS**

**Model: TALH/21S**


**Code: 42502020**

*PLANET*

RETARDER PROVER COUNTER WITH HUMIDITY CONTROL - Retarder-prover counter suitable for 600x400 containers/trays with humidity control.

- Construction: made in stainless steel
- Multifunction and multilingual
- Internal capacity: 600x400 mm trays
- Position of technical compartment: on right side
- Refrigeration type: refrigeration system HSS "Helped Static System"
- Control board panel: 5" TOUCH screen control board
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Supply with: 7 pair of runners each door





## Technical Data:

|                              |     |                  |
|------------------------------|-----|------------------|
| Body Height                  | mm  | 710              |
| Doors                        | nr  | 3                |
| Capacity (net)               | l   | 404              |
| Capacity (gross)             | l   | 605              |
| Capacity of trays/shelves    | mm  | 21 600x400       |
| External dimensions (WxDxH)  | cm  | 209 x 77 x 86    |
| Insulation thickness         | mm  | 50               |
| Tray pitch                   | mm  | 75               |
| Rack positions               | nr  | 7                |
| Top type                     |     | without work top |
| Evaporators                  | nr  | 1                |
| Standard lock                |     | NO               |
| Standard light               |     | NO               |
| Temperature                  | °C  | -2/+35°C         |
| Condensing unit              |     | plug-in unit     |
| Gas                          |     | R290             |
| Ventilation control          |     | NO               |
| Humidity control             |     | NO               |
| Relative humidity            | ur% | 60-90%           |
| Max abs. power               | W   | 1100***          |
| Cooling power                | W   | 650*             |
| Input voltage                |     | 1x230V ~ 50Hz    |
| Climate class                |     | 5                |
| Packaging dimensions (WxDxH) | cm  | 225 x 96 x 110   |
| Volume (gross)               | mc  | 2,38             |
| Net weight                   | kg  | 175              |
| Gross weight                 | kg  | 190              |

\*Evap. -10°C, Cond +45°C / \*\*\* Heating

DETAILS:



Stainless steel cm 40x60 tray



The stainless steel h 40 mm worktops are reinforced and made with 15/10 sheet metal



Humidity control with electronic probe




Ecological gas (R290)



5" TOUCH electronic board



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

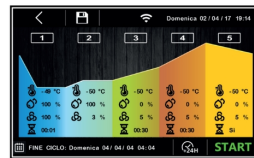

Automatic work cycle



Manual work cycle



Stainless steel cm 40x60 tray




The stainless steel h 40 mm worktops are reinforced and made with 15/10 sheet metal



Humidity control with electronic probe




Ecological gas (R290)



5" TOUCH electronic board



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Automatic work cycle



Manual work cycle

## ACCESSORIES:

---



Rilsan cm 60x40 shelf

45020550



Pair of runners for 60x40 cm trays

20808031



Stainless steel cm 40x60x2h tray

42000560

Stainless steel cm 40x60x3h tray

42000562



Set of no. 6 Ø 125 castors

40200532



Wi-Fi supervising system for AFLV, BCT (overprice)


45000563



60Hz frequency

40200560

## INSTALLATION DIAGRAM:

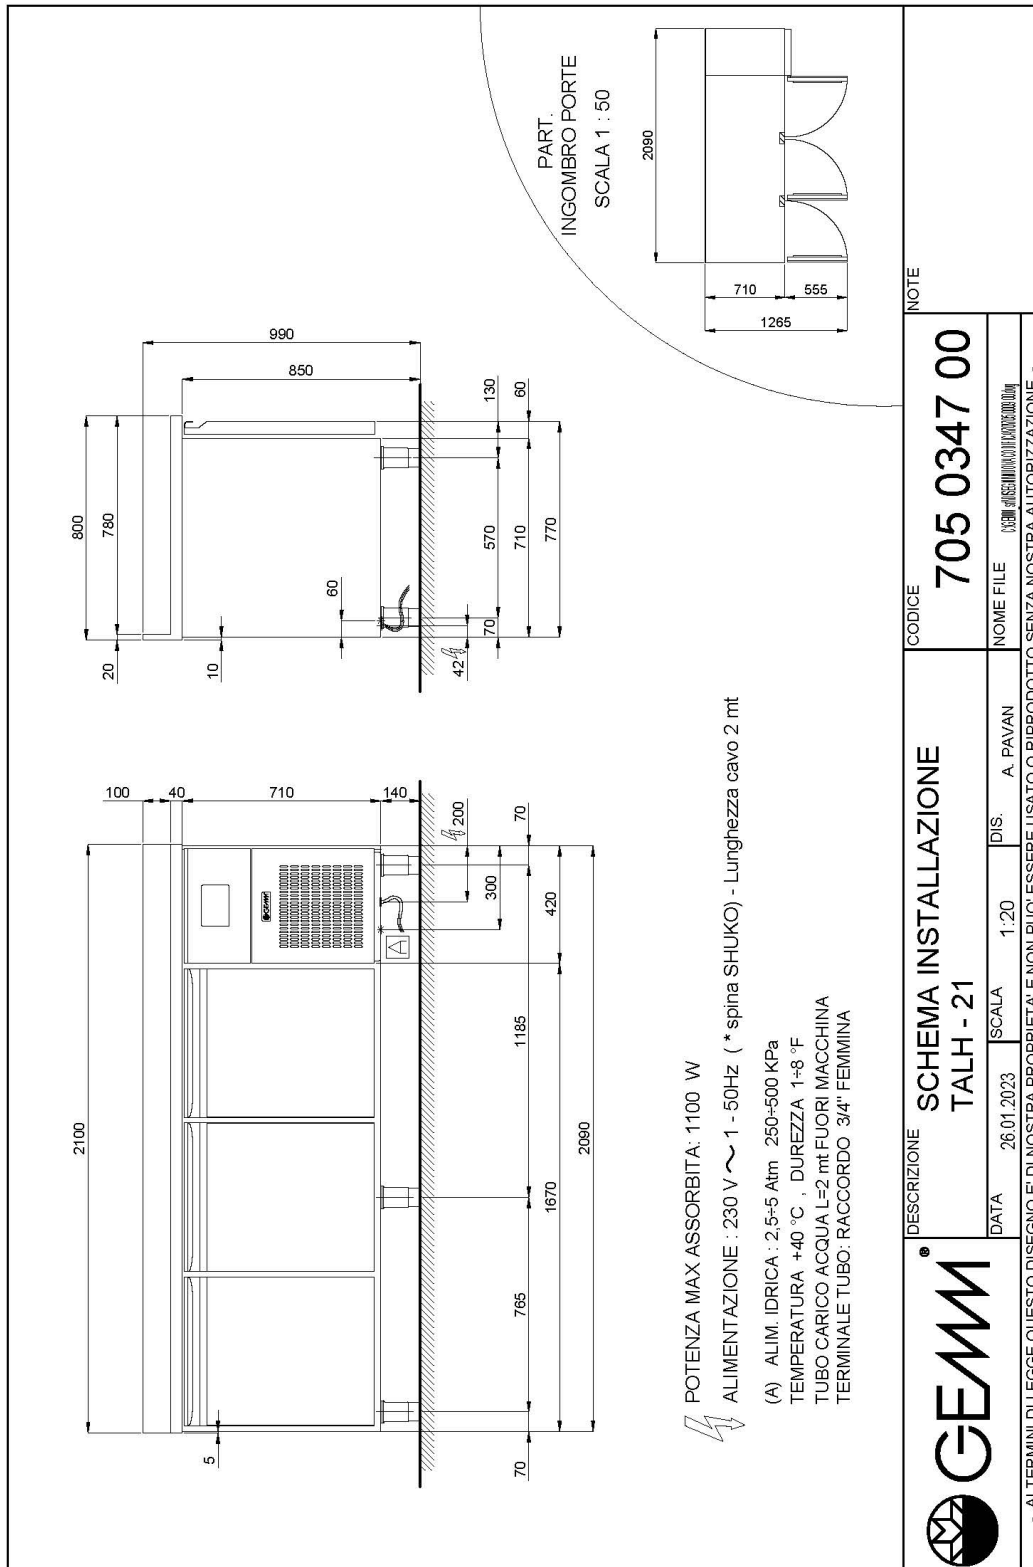

TALH/21S