

RETARDER PROOFING

600x400 COUNTERS

Model: TALH/21A

Code: 42502022

PLANET

RETARDER PROVER COUNTER WITH HUMIDITY CONTROL - Retarder-prover counter suitable for 600x400 containers/trays with humidity control.

- made in stainless steel
- 600x400 mm trays
- technical compartment on right side
- refrigeration system HSS "Helped Static System"
- 5" TOUCH screen control board
- prearranged to be installed on plinth
- multifunction and multilingual
- automatic defrosting system with heating elements
- automatic



Technical Data:

| | | |
|-------------------------------|-----|--------------------------|
| Body Height | mm | 710 |
| Doors | nr | 3 |
| Capacity of trays/shelves | nr | 21 600x400 |
| Insulation thickness | mm | 50 |
| External dimensions (WxDxH) | cm | 210 x 80 x 100 |
| Tray pitch | mm | 75 |
| Rack positions | nr | 7 |
| Stainless steel top thickness | mm | 15/10 h 40 |
| Top type | | AISI 304 with backsplash |
| Evaporators | nr | 1 |
| Standard lock | | NO |
| Standard light | | NO |
| Temperature | °C | -2/+35°C |
| Condensing unit | | plug-in unit |
| Gas | | R290 |
| Ventilation control | | NO |
| Umidity control | | YES |
| Relative umidity | ur% | 60-90% |
| Max abs. power | W | 1100 |
| Cooling power | W | 650 |
| Input voltage | | 1x230V ~ 50Hz |
| Climate class | | 5 |
| Packaging dimensions | cm | 227 x 96 x 110 |
| Volume | mc | 2,38 |
| Gross weight | kg | 227 |

DETAILS



Humidity control with electronic probe



The stainless steel h 40 mm worktops are reinforced and made with 15/10 sheet metal




Stainless steel cm 40x60 tray



Ecological gas (R290)



7" TOUCH electronic board



Automatic work cycle



Manual work cycle



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES



Rilsan cm 60x40 shelf

45020550



Pair of runners for 60x40 cm trays

20808031



Stainless steel cm 40x60x2h tray

42000560

Stainless steel cm 40x60x3h tray

42000562



Set of no. 6 Ø 125 castors

40200532



Wi-Fi supervising system for AFLV, BCT (overprice)


45000563



60Hz frequency

40200560

INSTALLATION DIAGRAM

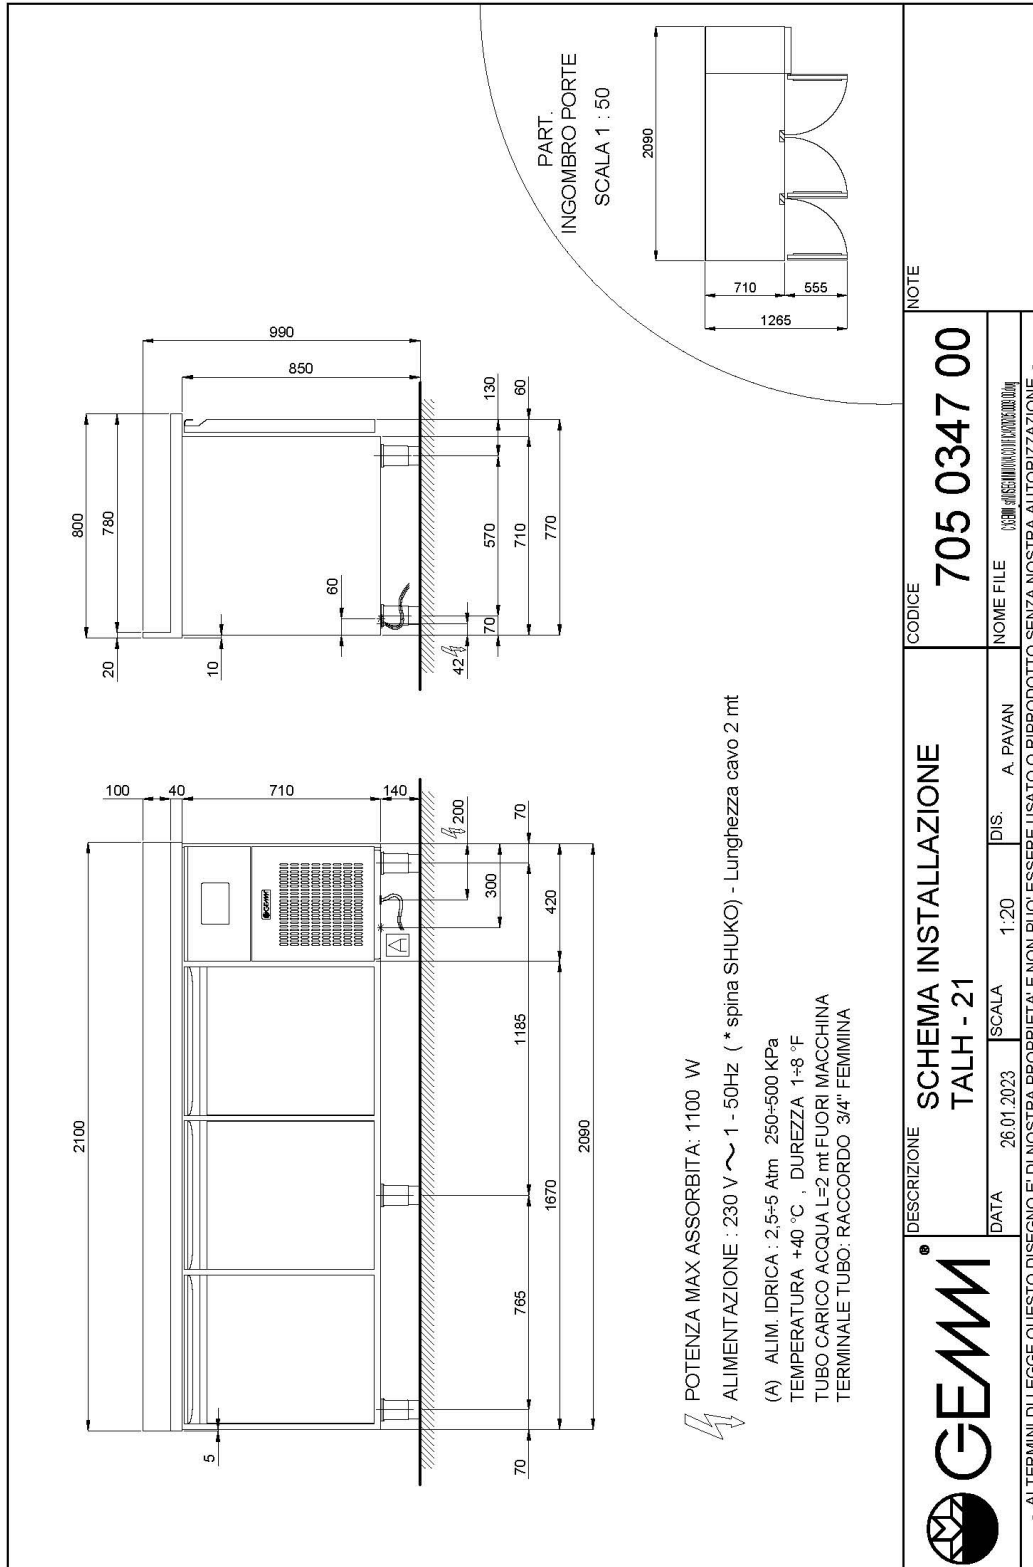

TALH/21A