

## PROFESSIONAL KITCHENS

**CABINETS FOR PROFESSIONAL KITCHENS**

**Model: EFN/01**


**Code: 45001880**

*SPACE*

GN 2/1 POSITIVE UPRIGHT CABINET - Refrigerated upright cabinet for GN 2/1 racks. Prearranged for remote condensing unit with valve system on request.

- Construction: made in stainless steel
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- prearranged to be installed on plinth
- Defrosting system: with heating elements
- Evaporation of condensation water: automatic condensate evaporation
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 3 GN 2/1 shelves





Technical Data:

|                              |          |               |
|------------------------------|----------|---------------|
| Doors                        | nr       | 1             |
| Capacity (net)               | l        | 404           |
| Capacity (gross)             | l        | 585           |
| External dimensions (WxDxH)  | cm       | 72 x 81 x 209 |
| Insulation thickness         | mm       | 60            |
| Tray pitch                   | mm       | 65            |
| Rack positions               | nr       | 19            |
| Evaporators                  | nr       | 1             |
| Standard lock                |          | YES           |
| Standard light               |          | NO            |
| Temperature                  | °C       | -2/+8°C       |
| Condensing unit              |          | plug-in unit  |
| Compressor power             | Hp       | 1/3           |
| Gas                          |          | R290          |
| Ventilation control          |          | NO            |
| Humidity control             |          | NO            |
| Max abs. power               | W        | 180**         |
| Cooling power                | W        | 425**         |
| Input voltage                |          | 1x230V ~ 50Hz |
| Energy efficiency class      |          | C             |
| Energy consumption kWh/24h   | kWh/24h  | 1,51          |
| Energy consumption kWh/year  | kWh/year | 550           |
| Energy efficiency index      |          | 43,21         |
| Climate class                |          | 5             |
| Packaging dimensions (WxDxH) | cm       | 77 x 84 x 215 |
| Volume (gross)               | mc       | 1,39          |
| Gross weight                 | kg       | 116           |

Evap. -10°C, Cond +45°C

DETAILS:



Door lock with key



Digital touch thermostat



Internal capacity GN 2/1



65mm pitch, 19 positions



Ventilated cooling system












Ecological gas (R290)




Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:

|   |  |          |
|---|--|----------|
|  | GN 2/1 shelf   | 45000500 |
|  | GN 2/1 stainless steel shelf   | 45000515 |
|  | Pair of runners for GN 2/1 shelf   | 45001550 |
|  | Pedal for single door  | 45000530 |
|  | Set of Ø 100 castors   | 45000540 |
|  | Pastry structure for 19 60x40cm trays (65 mm pitch) each door (overprice)          | 45000543 |
|  | Wi-Fi supervising system (overprice)   | 45000565 |
|  | 60Hz frequency   | 40200560 |
|  | Prearranged version with valve system for normal temperature equipment (deduction) |          |

INSTALLATION DIAGRAM:

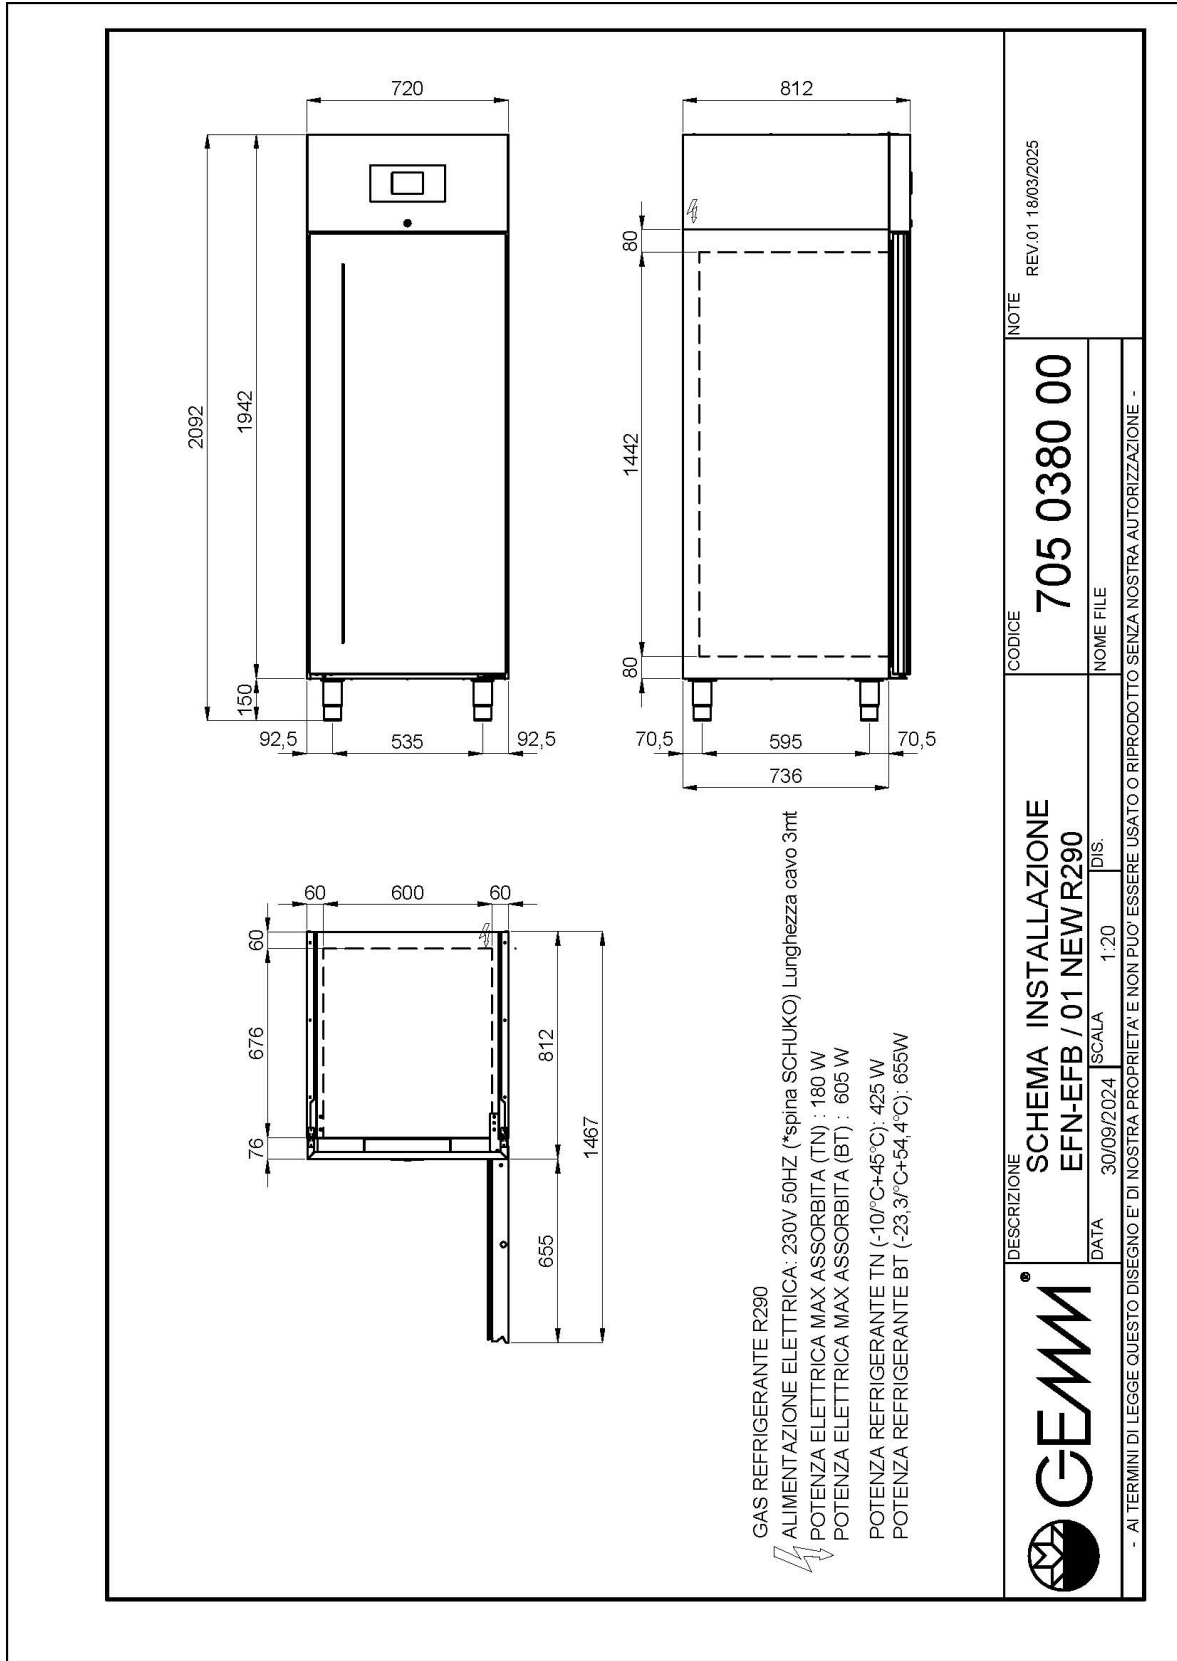

EFN/01

ECOLABEL:

