

PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS

Model: EFN/01


Code: 45001880

SPACE

GN 2/1 POSITIVE UPRIGHT CABINET - Refrigerated upright cabinet for GN 2/1 racks. Prearranged for remote condensing unit with valve system on request.

- Construction: made in stainless steel
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 3 GN 2/1 shelves





Technical Data:

Doors	nr	1
Capacity (net)	l	404
Capacity (gross)	l	585
External dimensions (WxDxH)	cm	72 x 81 x 209
Insulation thickness	mm	60
Tray pitch	mm	65
Rack positions	nr	19
Evaporators	nr	1
Standard lock		YES
Standard light		NO
Temperature	°C	-2/+8°C
Condensing unit		plug-in unit
Compressor power	Hp	1/3
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	180*
Cooling power	W	425*
Input voltage		1x230V ~ 50Hz
Energy efficiency class		C
Energy consumption kWh/24h	kWh/24h	1,51
Energy consumption kWh/year	kWh/year	550
Energy efficiency index		43,21
Climate class		5
Packaging dimensions (WxDxH)	cm	87 x 77 x 224
Volume (gross)	mc	1,5
Net weight	kg	106
Gross weight	kg	116

*Evap. -10°C, Cond +45°C

DETAILS:



Door lock with key



Digital touch thermostat



Internal capacity GN 2/1



65mm pitch, 19 positions



Ventilated cooling system



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



GN 2/1 shelf

45000500



GN 2/1 stainless steel shelf

45000515



Pair of runners for GN 2/1 shelf

45001550



Pedal for single door

45000530



Set of Ø 100 castors

45000540



Pastry structure for 19 60x40cm trays (65 mm pitch) each door (overprice)

45000543



Wi-Fi supervising system (overprice)

45000565




60Hz frequency

40200560



Prearranged version with valve system for normal temperature equipment (deduction)

INSTALLATION DIAGRAM:

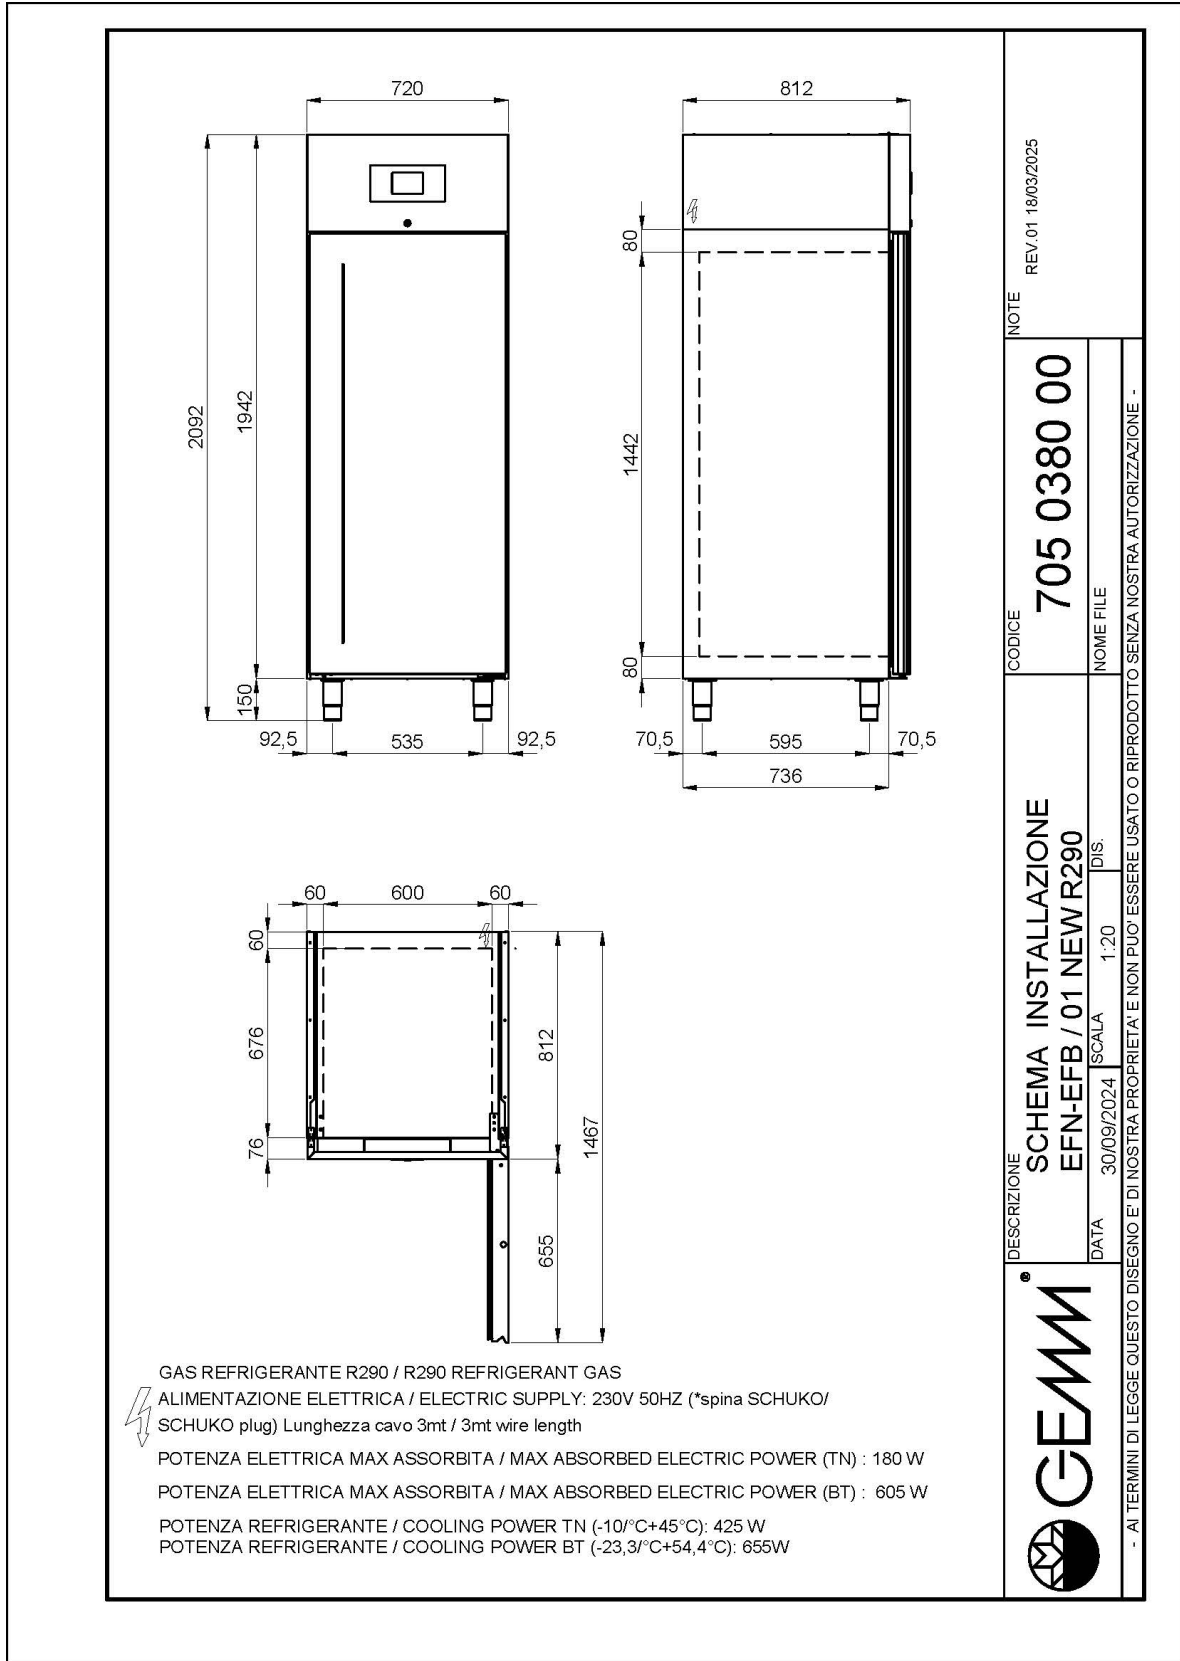

EFN/01

ECOLABEL:

