

PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS

Model: EFNV/02

Code: 45001895

SPACE

GN 2/1 POSITIVE UPRIGHT CABINET WITH GLASS DOORS - Refrigerated upright cabinet glass doors for GN 2/1 racks. Prearranged for remote condensing unit with valve system on request.

- Construction: made in stainless steel
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 6 GN 2/1 shelves





Technical Data:

Doors	nr	2
Capacity (net)	l	808
Capacity (gross)	l	1287
External dimensions (WxDxH)	cm	144 x 80 x 209
Insulation thickness	mm	60
Tray pitch	mm	65
Rack positions	nr	19
Evaporators	nr	1
Standard lock		YES
Standard light		NO
Temperature	°C	+2/+10°C
Condensing unit		plug-in unit
Compressor power	Hp	1/2
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	270*
Cooling power	W	560*
Input voltage		1x230V ~ 50Hz
Energy efficiency class		D
Energy consumption kWh/24h	kWh/24h	3,69
Energy consumption kWh/year	kWh/year	1346
Energy efficiency index		69,49
Climate class		4
Packaging dimensions (WxDxH)	cm	148 x 96 x 224
Volume (gross)	mc	3,18
Net weight	kg	182
Gross weight	kg	192

*Evap. -10°C, Cond +45°C

DETAILS:



Door lock with key



Digital touch thermostat



Internal capacity GN 2/1



65mm pitch, 19 positions



Ventilated cooling system



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



GN 2/1 shelf

45000500



GN 2/1 stainless steel shelf

45000515



Pair of runners for GN 2/1 shelf

45001550



Pedal for double door

45000532



Set of Ø 100 castors

45000540



Pastry structure for 19 60x40cm trays (65 mm pitch) each door (overprice)

45000543



Wi-Fi supervising system (overprice)

45000565




60Hz frequency

40200560



Prearranged version with valve system for normal temperature equipment (deduction)

INSTALLATION DIAGRAM:

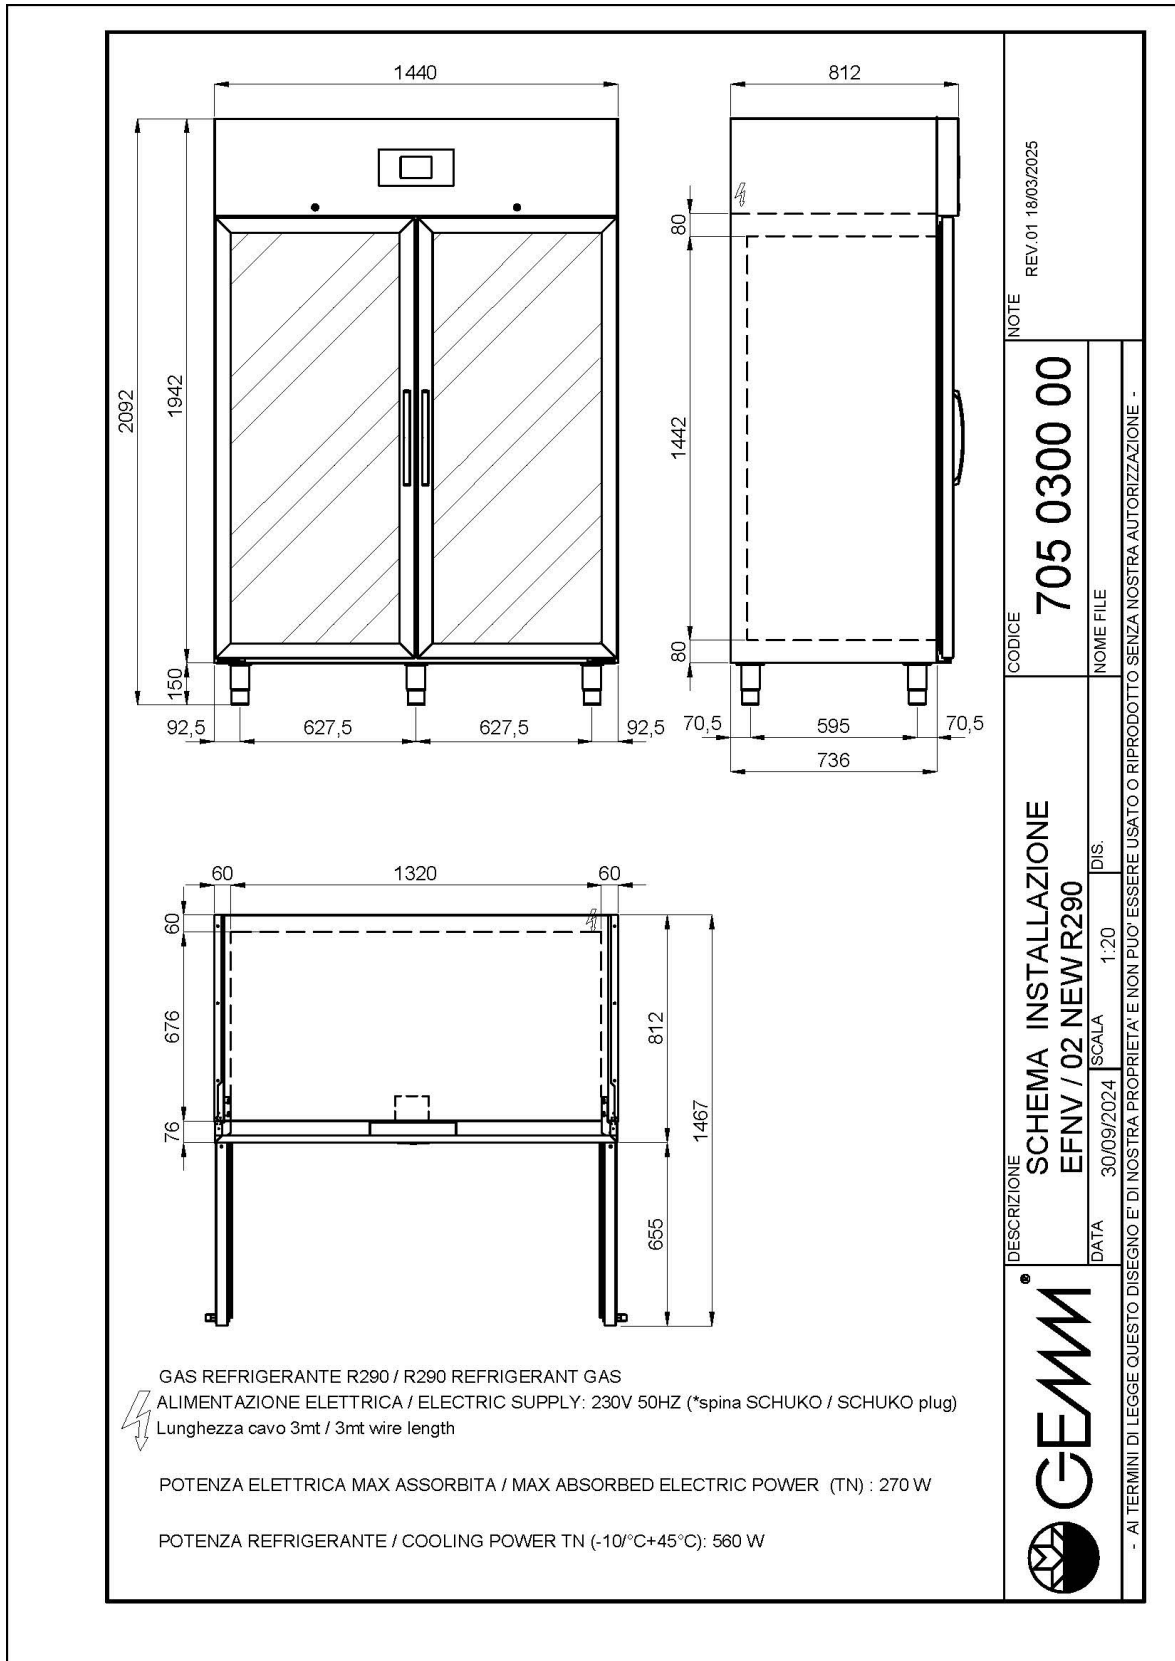

EFNV/02

ECOLABEL:

