

PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS

Model: EFB/01


Code: 45001910

SPACE

GN 2/1 NEGATIVE UPRIGHT CABINET - Freezer upright cabinet for GN 2/1 racks. Prearranged for remote condensing unit with valve system on request.

- Construction: made in stainless steel
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with hot gas
- Evaporation of condensation water: automatic
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 3 GN 2/1 shelves





Technical Data:

Doors	nr	1
Capacity (net)	l	404
Capacity (gross)	l	585
External dimensions (WxDxH)	cm	72 x 81 x 209
Insulation thickness	mm	60
Tray pitch	mm	65
Rack positions	nr	19
Evaporators	nr	1
Standard lock		YES
Standard light		NO
Temperature	°C	-18/-21°C
Condensing unit		plug-in unit
Compressor power	Hp	1/2
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	605*
Cooling power	W	655**
Input voltage		1x230V ~ 50Hz
Energy efficiency class		D
Energy consumption kWh/24h	kWh/24h	5,49
Energy consumption kWh/year	kWh/year	2004
Energy efficiency index		57,88
Climate class		5
Packaging dimensions (WxDxH)	cm	87 x 77 x 224
Volume (gross)	mc	1,5
Net weight	kg	112
Gross weight	kg	122

*Evap. -10°C, Cond. +45°C / **Evap. -23,3 Cond. +54,4°C

DETAILS:



Door lock with key



Digital touch thermostat



Internal capacity GN 2/1



65mm pitch, 19 positions



Ventilated cooling system



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



GN 2/1 shelf

45000500



GN 2/1 stainless steel shelf

45000515



Pair of runners for GN 2/1 shelf

45001550



Pedal for single door

45000530



Set of Ø 100 castors

45000540



Pastry structure for 19 60x40cm trays (65 mm pitch) each door (overprice)

45000543



Wi-Fi supervising system (overprice)

45000565




60Hz frequency

40200560



Prearranged version with valve system for low temperature equipment (deduction)

INSTALLATION DIAGRAM:

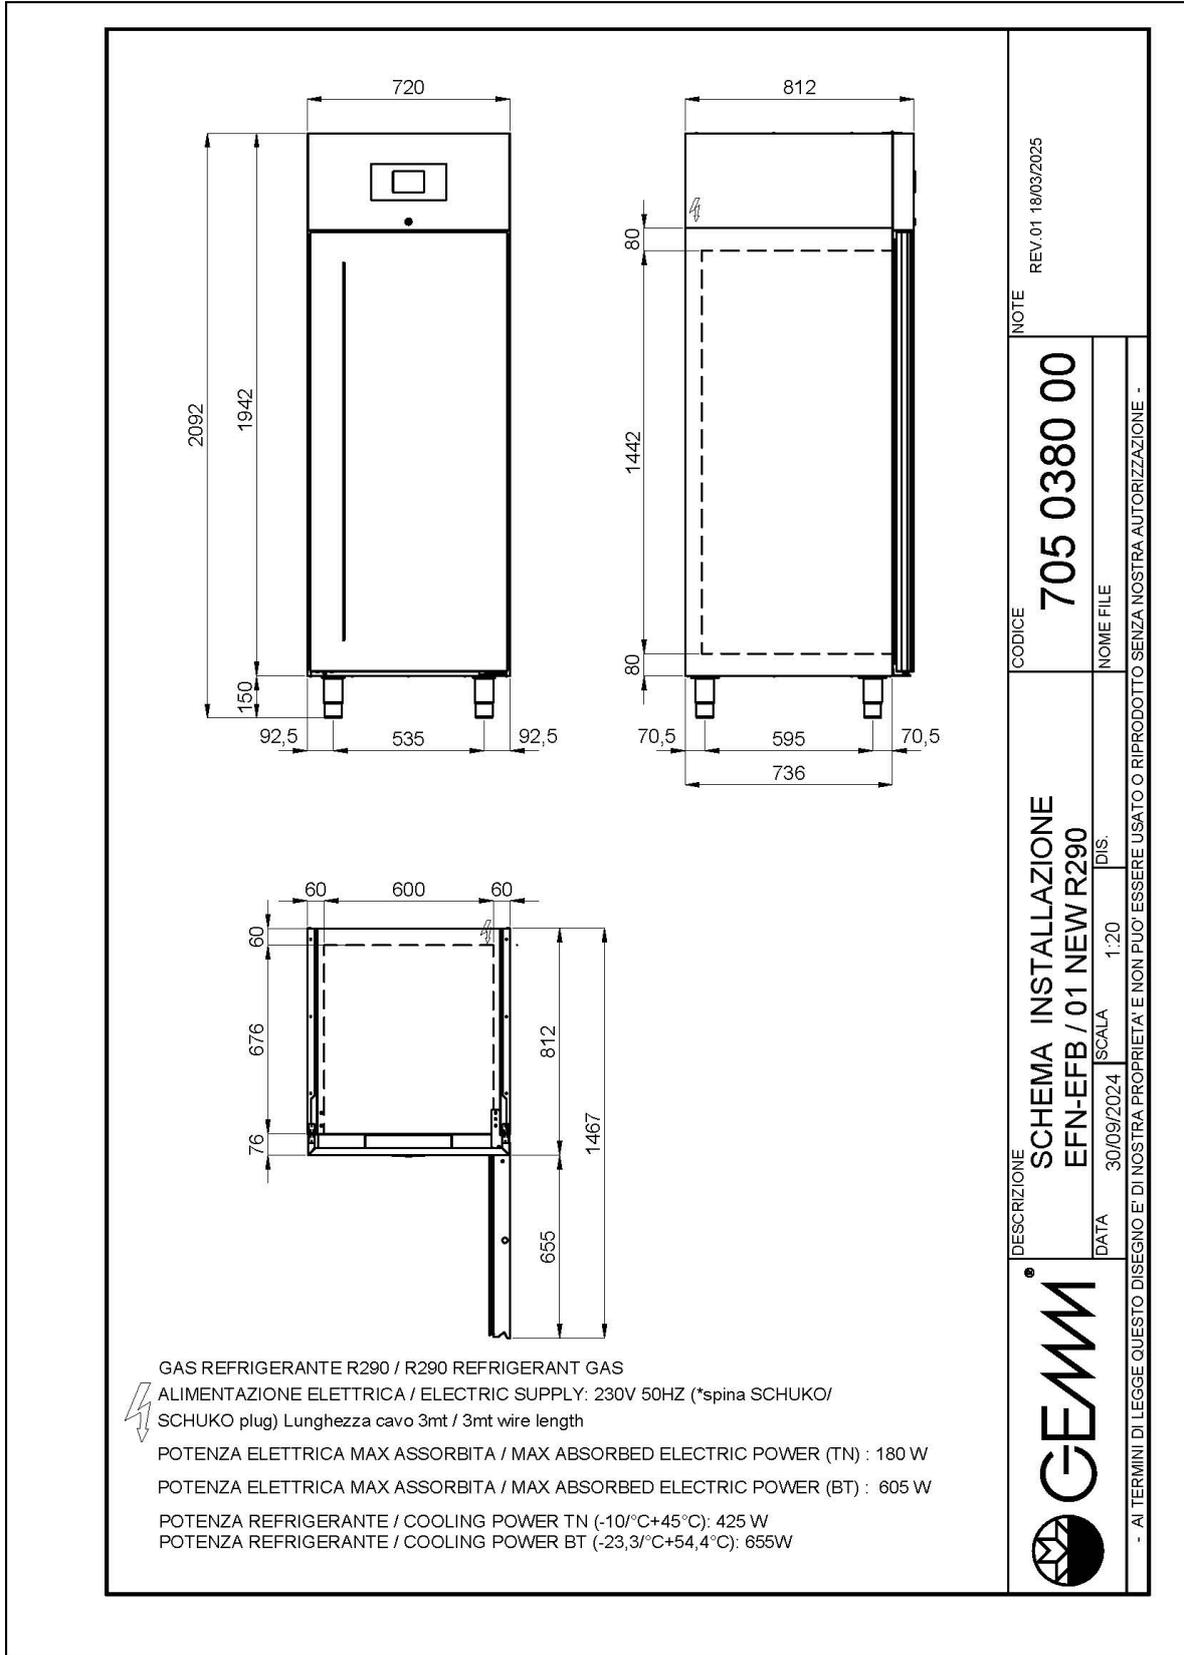

EFB/01

ECOLABEL:

