PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS **Model: XFN/70** **Code: 45002080**


SPACE PLUS

GN 2/1 POSITIVE UPRIGHT CABINET - Refrigerated upright cabinet for GN 2/1 racks, complete with door lock with key and led light. Prearranged for remote condensing unit with valve system on request.



- Construction: made in stainelss steel
- Deep-drawn internal sides
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 3 GN 2/1 shelves

GEMM®



Technical Data:


Doors	nr	1
Capacity (net)	l	433
Capacity (gross)	l	556
External dimensions (WxDxH)	cm	70 x 89 x 209
Insulation thickness	mm	80
Tray pitch	mm	55
Rack positions	nr	24
Standard lock		YES
Standard light		YES
Temperature	°C	-2/+8°C
Condensing unit		plug-in unit
Compressor power	Hp	1/3
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	185*
Cooling power	W	425*
Input voltage		1x230V ~ 50Hz
Energy efficiency class		B
Energy consumption kWh/24h	kWh/24h	1,25
Energy consumption kWh/year	kWh/year	458
Energy efficiency index		34,7
Climate class		5
Packaging dimensions (WxDxH)	cm	77 x 96 x 224
Volume (gross)	mc	1,66
Net weight	kg	111
Gross weight	kg	126

*Evap. -10°C, Cond +45°C


DETAILS:



Internal details of deep-drawn stainless steel-sides



Ventilated cooling system



Door lock with key and internal light




Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:


	GN 2/1 shelf	45000500
	GN 2/1 stainless steel shelf	45000515
	Pedal for single door	45000530
	Set of Ø 100 castors	45000540
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560
	Prearranged version with valve system for normal temperature equipment (deduction)	

INSTALLATION DIAGRAM:

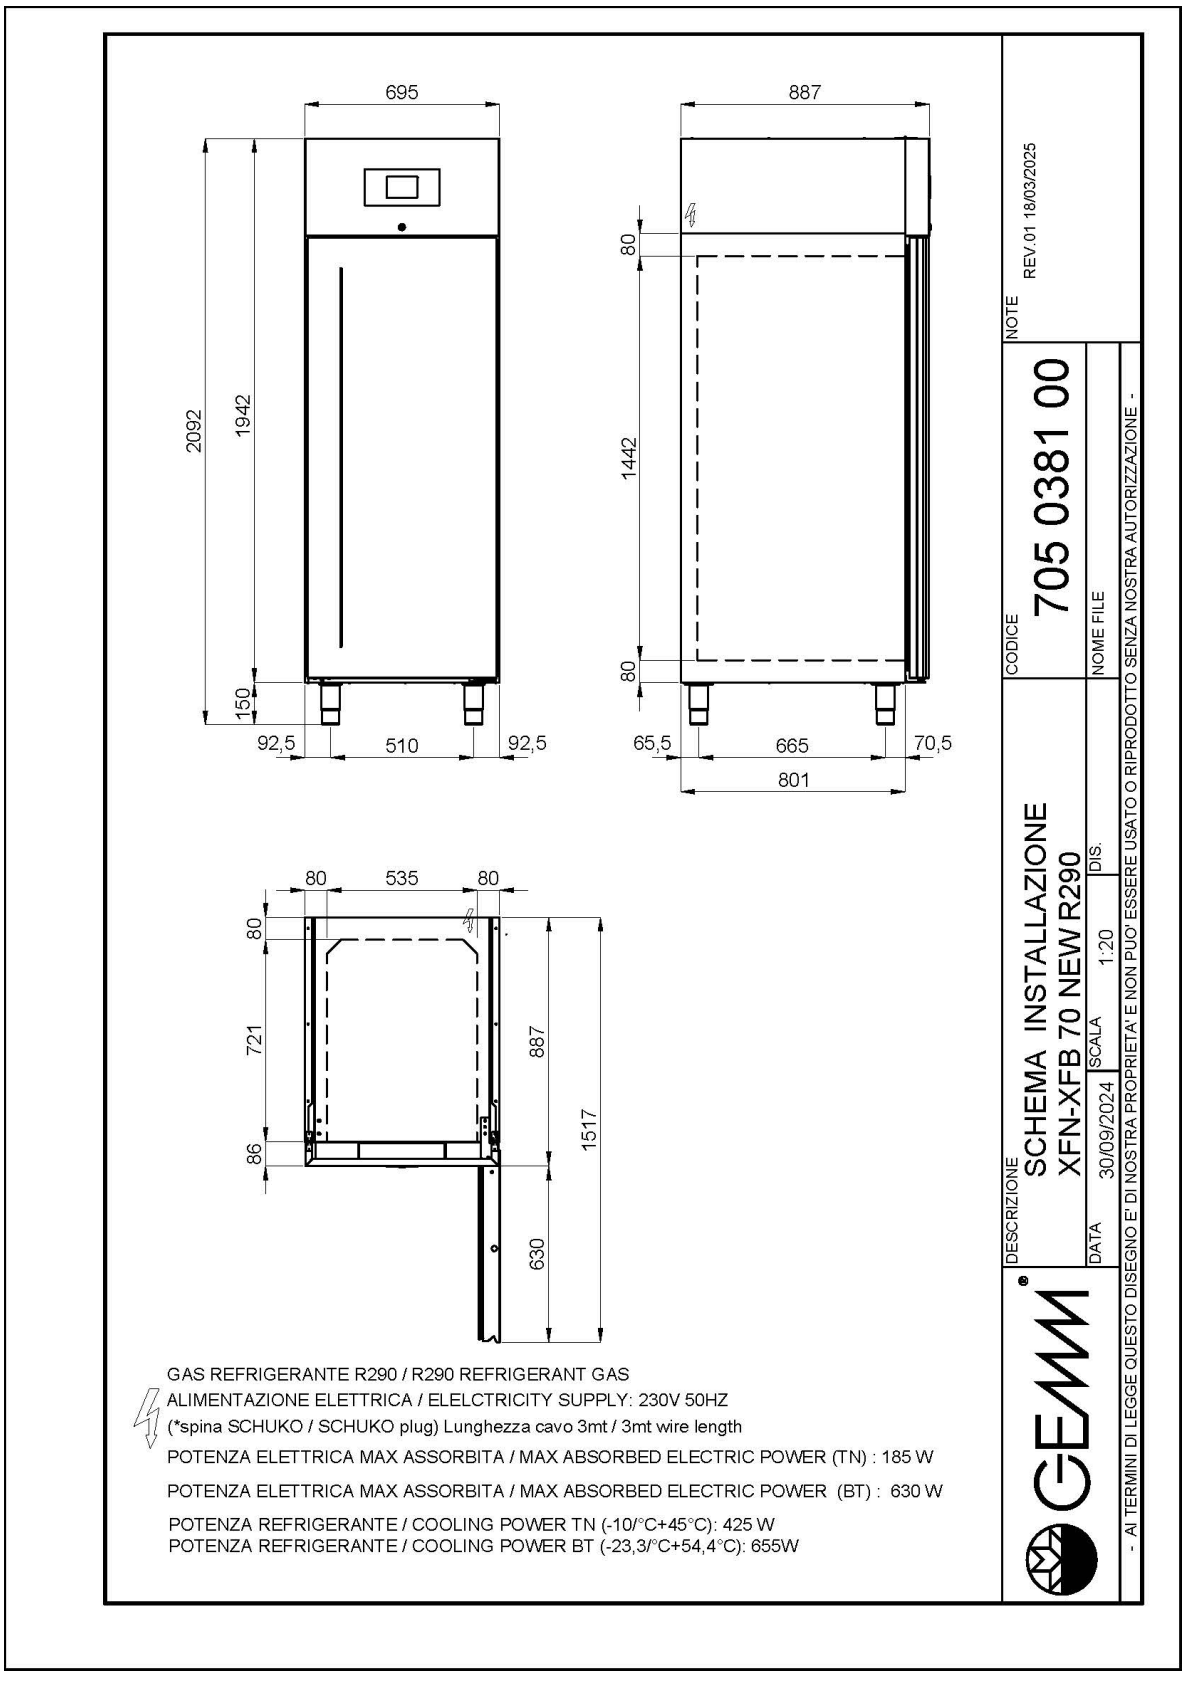

XFN/70

ECOLABEL:

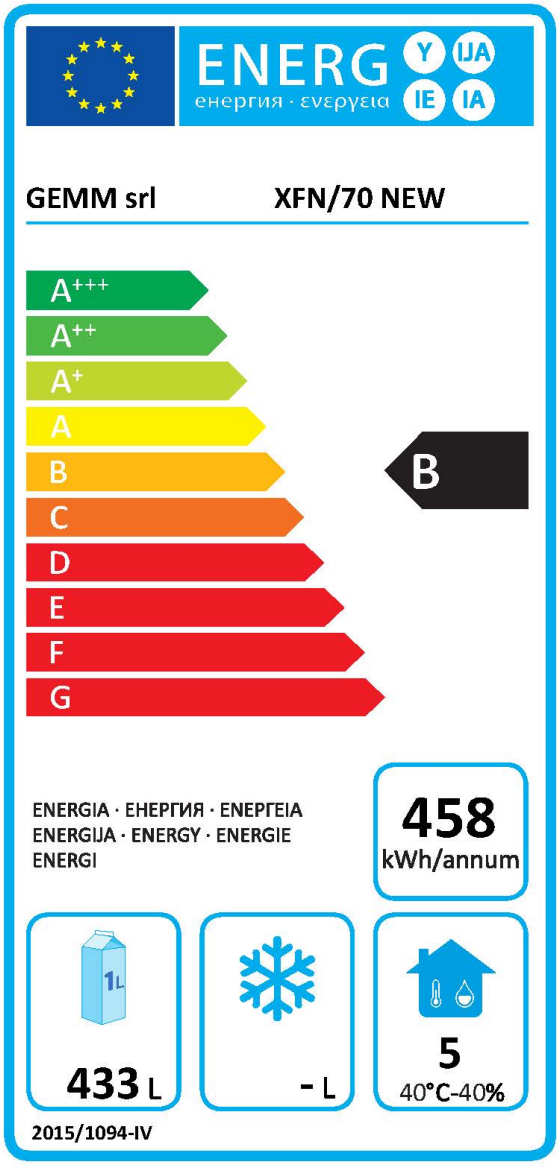
ENERG
енергия · ενεργεια
Y
IJA
IE
IA
GEMM srl
XFN/70 NEW
A+++
A++
A+
A
B
C
D
E
F
G
B
ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ
ENERGIJA · ENERGY · ENERGIE
ENERGI
458
kWh/annum
1L
433 L
- L
5
40°C-40%
2015/1094-IV