PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS **Model: XFB/140** **Code: 45002140**


SPACE PLUS

GN 2/1 NEGATIVE UPRIGHT CABINET - Freezer upright cabinet for GN 2/1 racks, complete with door lock with key and led light. Prearranged for remote condensing unit with valve system on request.



- Construction: made in stainelss steel
- Deep-drawn internal sides
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with hot gas
- Evaporation of condensation water: automatic
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 6 GN 2/1 shelves

GEMM®



Technical Data:


Doors	nr	2
Capacity (net)	l	866
Capacity (gross)	l	1279
External dimensions (WxDxH)	cm	139 x 89 x 209
Insulation thickness	mm	80
Tray pitch	mm	55
Rack positions	nr	24
Standard lock		YES
Standard light		YES
Temperature	°C	-18/-21°C
Condensing unit		plug-in unit
Compressor power	Hp	1
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	920*
Cooling power	W	955**
Input voltage		1x230V ~ 50Hz
Energy efficiency class		D
Energy consumption kWh/24h	kWh/24h	10,99
Energy consumption kWh/year	kWh/year	4011
Energy efficiency index		69,9
Climate class		5
Packaging dimensions (WxDxH)	cm	148 x 96 x 224
Volume (gross)	mc	3,18
Net weight	kg	194
Gross weight	kg	214

Evap. -10°C, cond. +45°C/*ASHRAE (evap. -23,3 cond. +54,4°C)


DETAILS:



Internal details of deep-drawn stainless steel-sides



Ventilated cooling system



Door lock with key and internal light




Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:

	GN 2/1 shelf	45000500
	GN 2/1 stainless steel shelf	45000515
	Pedal for double door	45000532
	Set of Ø 100 castors	45000540
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560
	Prearranged version with valve system for low temperature equipment (deduction)	

INSTALLATION DIAGRAM:

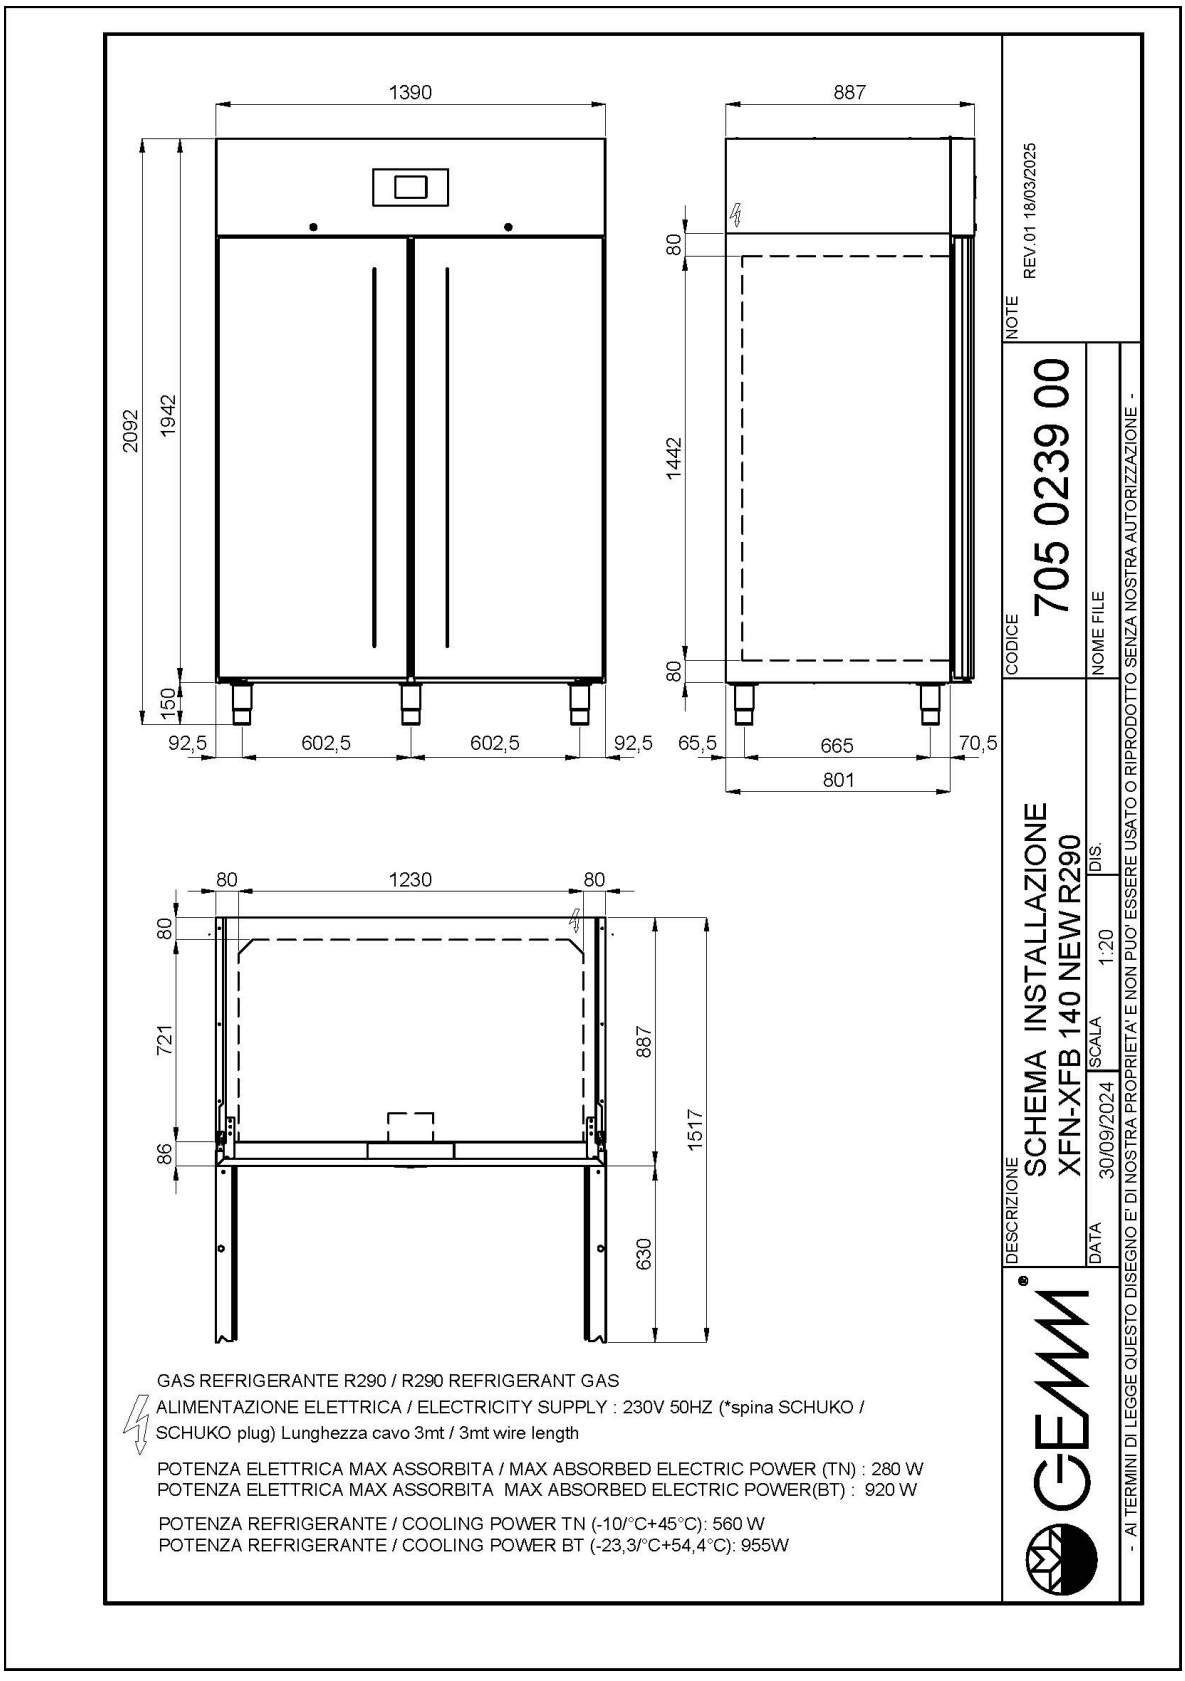

XFB/140

ECOLABEL:


ENERG
енергия · ενεργεια
Y
IJA
IE
IA
GEMM srl
XFB/140 NEW
A+++
A++
A+
A
B
C
D
E
F
G
D
ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ
ENERGIJA · ENERGY · ENERGIE
ENERGI
4011
kWh/annum
1L
- L
866 L
5
40°C-40%
2015/1094-IV