

PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS

Model: XFBV/140


Code: 45002150

SPACE PLUS

GN 2/1 NEGATIVE UPRIGHT CABINET WITH GLASS DOORS - Freezer upright cabinet glass doors for GN 2/1 racks, complete with led light. Prearranged for remote condensing unit with valve system on request.

- made in stainless steel
- internal capacity: GN 2/1 racks
- upper technical compartment
- ventilated cooling system
- 2.8" touch control panel, digital display
- prearranged to be installed on plinth
- deep-drawn internal sides
- automatic defrosting system defrosting system with hot gas
- automatic condensate evaporation
- on request: prearranged for remote system (R452A gas valve)
- supply with: 6 GN 2/1 shelves





Technical Data:

Doors	nr	2
Capacity (gross)	l	1400
Insulation thickness	mm	80
External dimensions (WxDxH)	cm	139 x 89 x 209
Tray pitch	mm	55
Rack positions	nr	24
Standard lock		YES
Standard light		YES
Temperature	°C	-18/-21°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		NO
Umidity control		NO
Max abs. power	W	980**
Cooling power	W	955***
Input voltage		1x230V ~ 50Hz
Energy efficiency class		F
Energy consumption kWh/24h	kWh/24h	5043
Climate class		4
Packaging dimensions	cm	153 x 92 x 222
Volume	mc	3,12
Gross weight	kg	215

Evap. -10°C, cond. +45°C/ASHRAE (evap. -23,3 cond. +54,4°C)


DETAILS



Internal details of deep-drawn stainless steel-sides



Ventilated cooling system



Door lock with key and internal light



Digital touch thermostat










Ecological gas (R290)




Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES

	GN 2/1 shelf	45000500
	GN 2/1 stainless steel shelf	45000515
	Pedal for double door	45000532
	Set of Ø 100 castors	45000540
	Wi-Fi supervising system	45000565
	60Hz frequency	40200560
	Prearranged version with valve system for low temperature equipment (deduction)	

INSTALLATION DIAGRAM

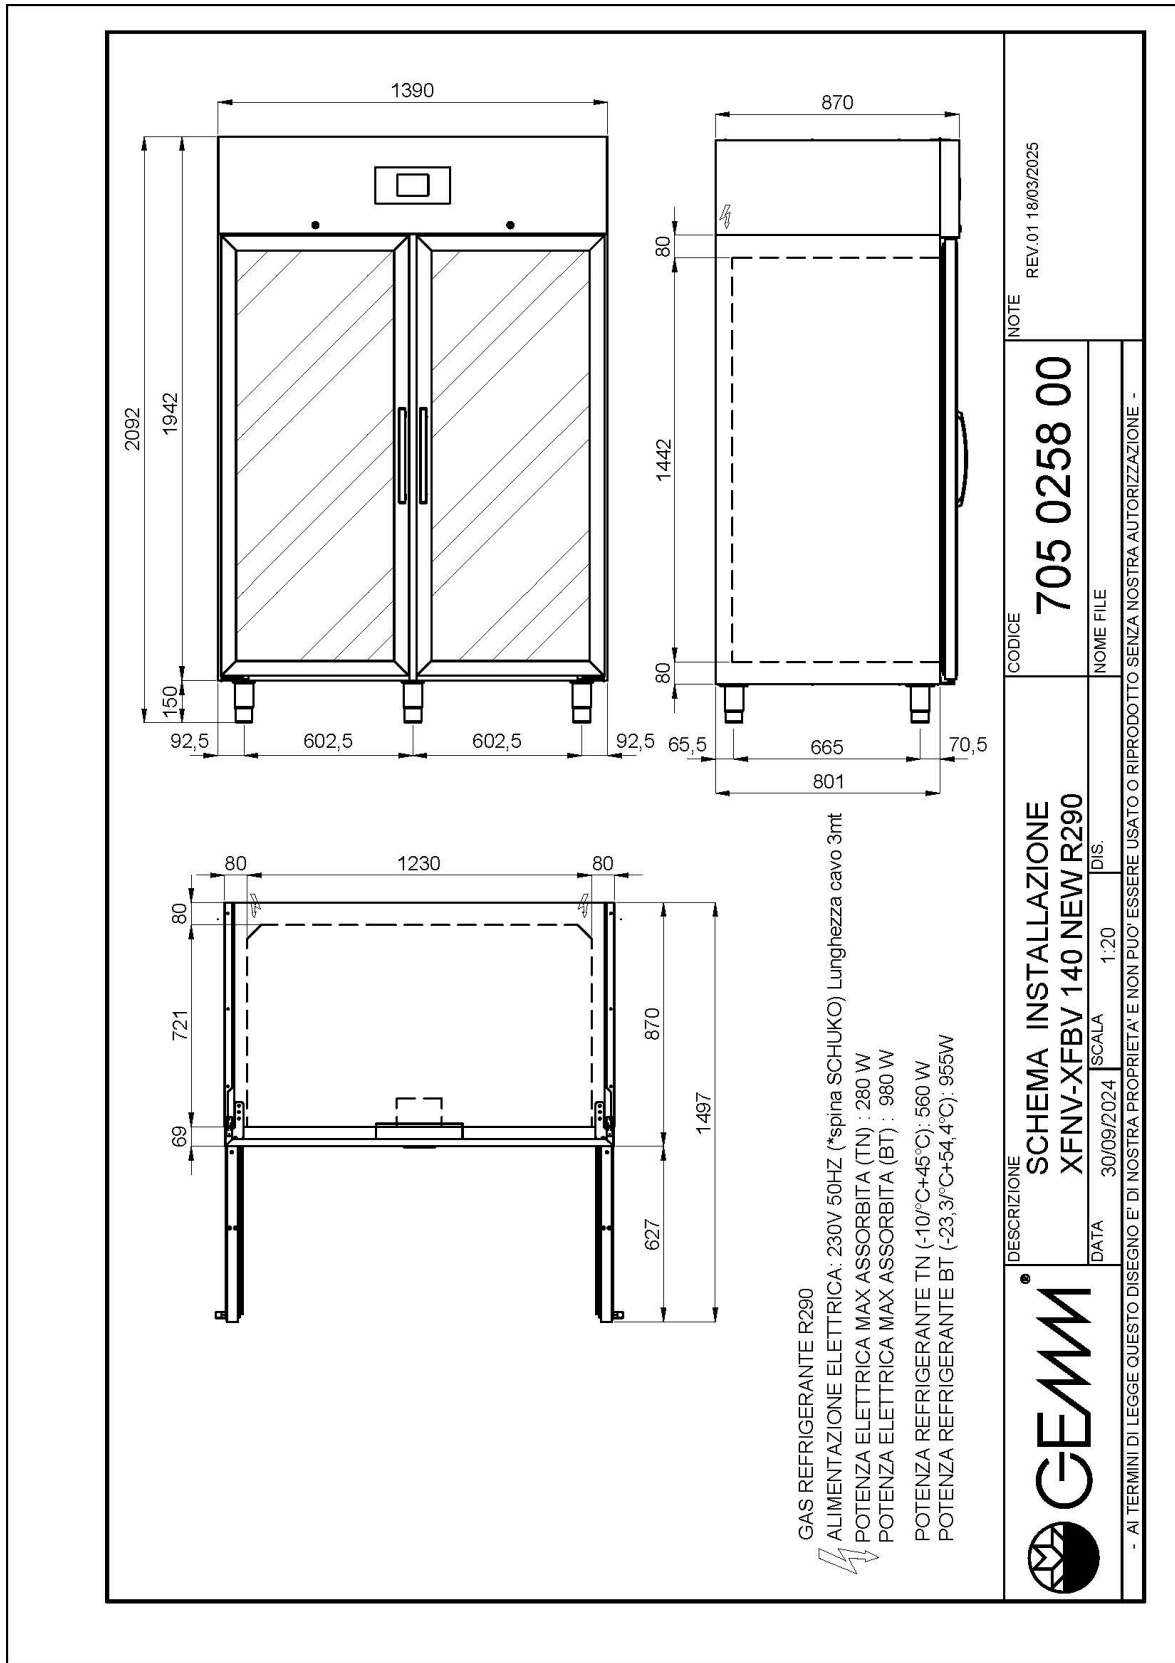

XFBV/140

ECOLABEL

