

PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS

Model: XFC/70

Code: 45002190

SPACE PLUS

GN 2/1 COMBINED POSITIVE/POSITIVE UPRIGHT CABINET, 2 HALF DOORS - Combined refrigerated upright cabinet for GN 2/1 racks, complete with door locks with key and led light. Prearranged for remote condensing unit with valve system on request.

- Construction: made in stainless steel
- Deep-drawn internal sides
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 4 GN 2/1 shelves





Technical Data:

| | | |
|------------------------------|----|-----------------|
| Doors | nr | 2 1/2 |
| Capacity (gross) | l | 501 |
| External dimensions (WxDxH) | cm | 70 x 93 x 209 |
| Insulation thickness | mm | 80 |
| Tray pitch | mm | 55 |
| Standard lock | | YES |
| Standard light | | YES |
| Temperature | °C | -2/+8°C -2/+8°C |
| Condensing unit | | plug-in unit |
| Compressor power | Hp | 1/2 - 1/2 |
| Gas | | R290 |
| Ventilation control | | NO |
| Humidity control | | NO |
| Max abs. power | W | 310*310* |
| Cooling power | W | 360*360* |
| Input voltage | | 1x230V ~ 50Hz |
| Climate class | | 5 |
| Packaging dimensions (WxDxH) | cm | 86 x 114 x 226 |
| Volume (gross) | mc | 2,22 |
| Net weight | kg | 161 |
| Gross weight | kg | 171 |

*Evap. -10°C, Cond +45°C

DETAILS:



Internal details of deep-drawn stainless steel-sides



Ventilated cooling system



Door lock with key and internal light



Digital touch thermostat



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



GN 2/1 shelf

45000500



GN 2/1 stainless steel shelf

45000515



Set of Ø 100 castors

45000540



Wi-Fi supervising system (overprice)

45000565




60Hz frequency

40200560



Prearranged version with valve system for normal temperature equipment
(deduction)

INSTALLATION DIAGRAM:

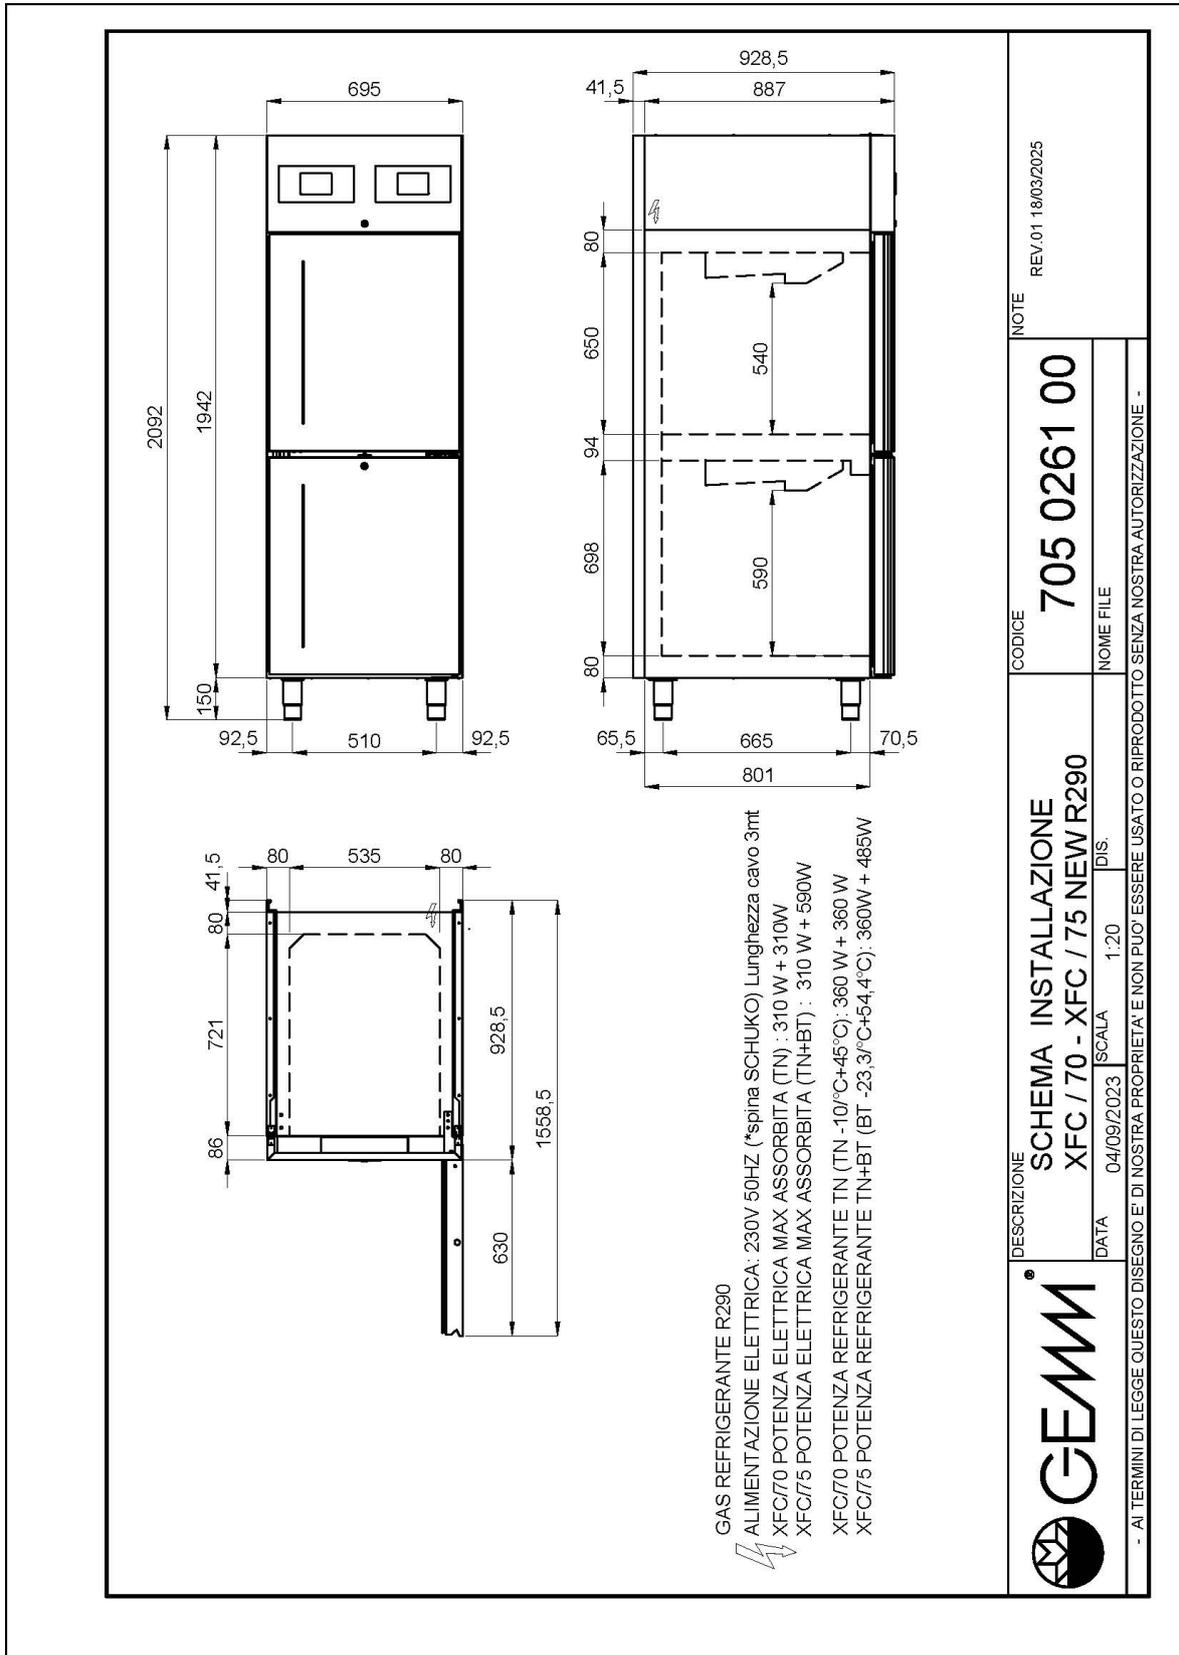

XFC/70