

PASTRY|PIZZERIA

PASTRY CABINETS

Model: ARP/40


Code: 45010510

DELICE

PASTRY POSITIVE UPRIGHT CABINET 40 TRAYS - Pastry refrigerated cabinet for 40 600x400 trays, with high umidity level for a better storage of fresh product. Available also prearranged for remote condensing unit with valve system.

- Construction: made in staineless steel
- "Overcooling" and "energy saving" functions
- Internal capacity: 40 600x400 mm trays
- Position of technical compartment: on top
- Refrigeration type: "Gentle" cooling system with indirect/soft ventilation
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with hot gas
- Evaporation of condensation water: automatic
- 74 positions for shelves
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 20 pair of runners for 600x800 trays





Technical Data:

| | | |
|------------------------------|----------|----------------|
| Doors | nr | 1 |
| Capacity (net) | l | 608 |
| Capacity (gross) | l | 900 |
| Capacity of trays/shelves | mm | 40 |
| External dimensions (WxDxH) | cm | 79 x 108 x 214 |
| Insulation thickness | mm | 75 |
| Tray pitch | mm | 16,5 |
| Rack positions | nr | 74 |
| Standard lock | | NO |
| Standard light | | NO |
| Temperature | °C | -2/+8°C |
| Condensing unit | | plug-in unit |
| Gas | | R290 |
| Ventilation control | | NO |
| Humidity control | | NO |
| Max abs. power | W | 715* |
| Cooling power | W | 1005* |
| Input voltage | | 1x230V ~ 50Hz |
| Energy efficiency class | | D |
| Energy consumption kWh/24h | kWh/24h | 2,55 |
| Energy consumption kWh/year | kWh/year | 932 |
| Energy efficiency index | | 57,9 |
| Climate class | | 5 |
| Packaging dimensions (WxDxH) | cm | 87 x 114 x 226 |
| Volume (gross) | mc | 2,24 |
| Net weight | kg | 178 |
| Gross weight | kg | 188 |

*Evap. -10°C, Cond +45°C

DETAILS:



Internal cell probe for constant temperature monitoring



Evaporators with cataphoresis treatment and electronic fans



Constant temperature monitoring with digital control board



Custom color finish available on request



Racks with easily removable guides featuring 74 positions (16.5 mm pitch)



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



Pair of runners for cm 60x80 shelf

45020511

Rilsan cm 60x80 shelf

45020512

Stainless steel 60x80 cm shelf

45020515



Stainless steel cm 40x60x2h tray

42000560

Stainless steel cm 40x60x3h tray

42000562



Stainless steel cm 60x80x2h tray

45020520



Toughened glass door with internal LED light (overprice)

45020525



Cabinet LED light

45020530



Set of Ø 100 castors

45000540



Wi-Fi supervising system (overprice)

45000565




60Hz frequency

40200560



Prearranged version with valve system for normal temperature equipment (deduction)

INSTALLATION DIAGRAM:

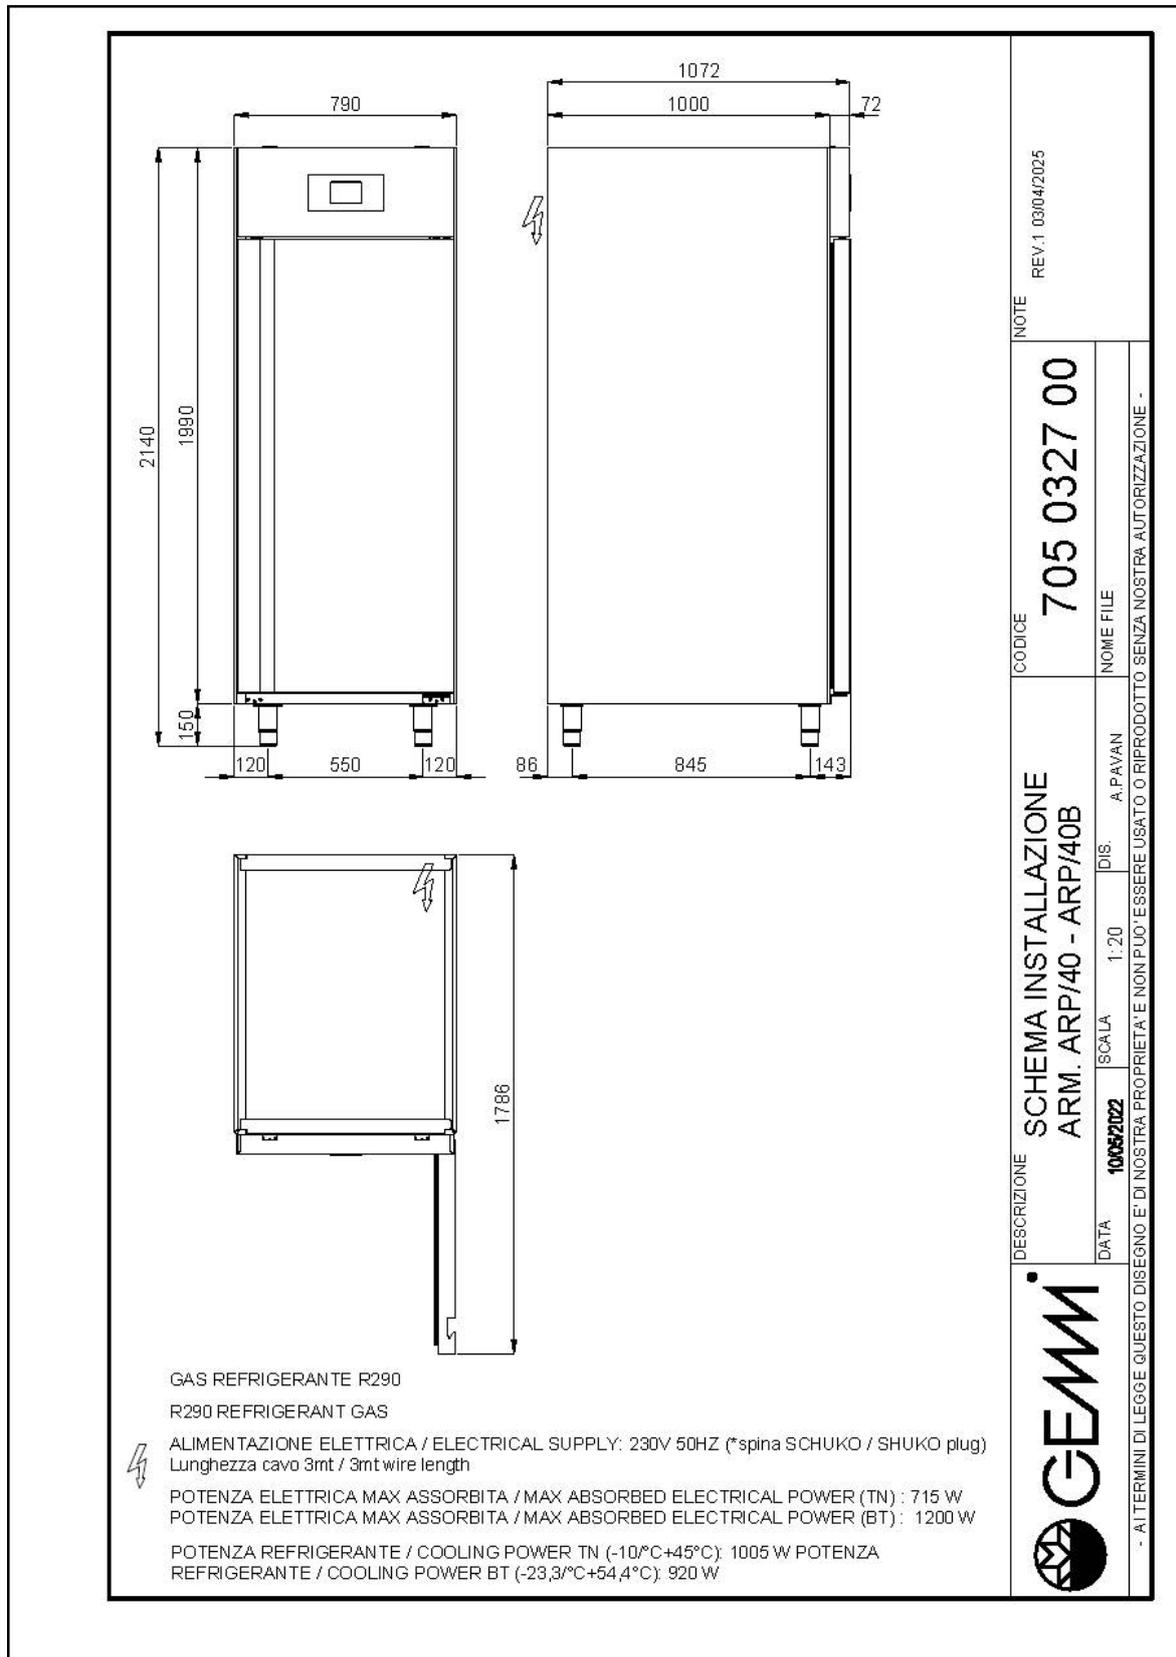

ARP/40

ECOLABEL:

