ICE CREAM

GELATO STORAGE CABINETS   **Model: ARG/40**   **Code: 45010530**

DELICE

FREEZER CABINET FOR ICE-CREAM 1 DOOR - Ice-cream freezer cabinet for 54 5l ice-cream containers (360x160x120h), gelato hardening cycle. Available also prearranged for remote condensing unit with valve system.

• Construction: made in stainelss steel
• Gelato hardening cycle, , energy saving
• Internal capacity: 54 5 lt ice-cream containers (360x160x120h mm)
• Position of technical compartment: on top
• Refrigeration type: ventilated cooling system
• Control board panel: 2.8" touch control panel, digital display
• Prearranged to be installed on plinth
• Defrosting system: automatic with hot gas
• Evaporation of condensation water: automatic
• Optional equipment: prearranged for remote system (R452A gas valve)
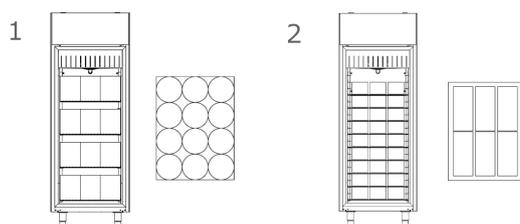• Supply with: 5 600x800 shelves

GEMM®

Technical Data:

Doors	nr	1
Capacity (net)	l	608
Capacity (gross)	l	900
External dimensions (WxDxH)	cm	79 x 108 x 214
Insulation thickness	mm	75
Tray pitch	mm	16,5
Rack positions	nr	74
Standard lock		NO
Standard light		NO
Temperature	°C	-25/-10°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	1200*
Cooling power	W	920**
Input voltage		1x230V ~ 50Hz
Energy consumption kWh/24h	kWh/24h	9,4
Energy consumption kWh/year	kWh/year	3419
Energy efficiency index		76,5
Climate class		5
Packaging dimensions (WxDxH)	cm	87 x 114 x 226
Volume (gross)	mc	2,24
Net weight	kg	195
Gross weight	kg	205

*Evap. -10°C, Cond. +45°C / **Evap. -23,3 Cond. +54,4°C

FEATURES OF COOLING SYSTEM AND COMPONENTS:

Containers capacity: ARG/40 n. 54 ice cream containers (5 lt container cm 36x16x12h)
Containers capacity: ARG/40 n. 48 carapina bowls (dim. Ø20 h25 cm)

DETAILS:

Internal cell probe for constant temperature monitoring

Evaporators with cataphoresis treatment and electronic fans

Constant temperature monitoring with digital control board

Total internal capacity of 54 ice cream containers of 5 liters each

Custom color finish available on request

Racks with easily removable guides featuring 74 positions (16.5 mm pitch)

Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:

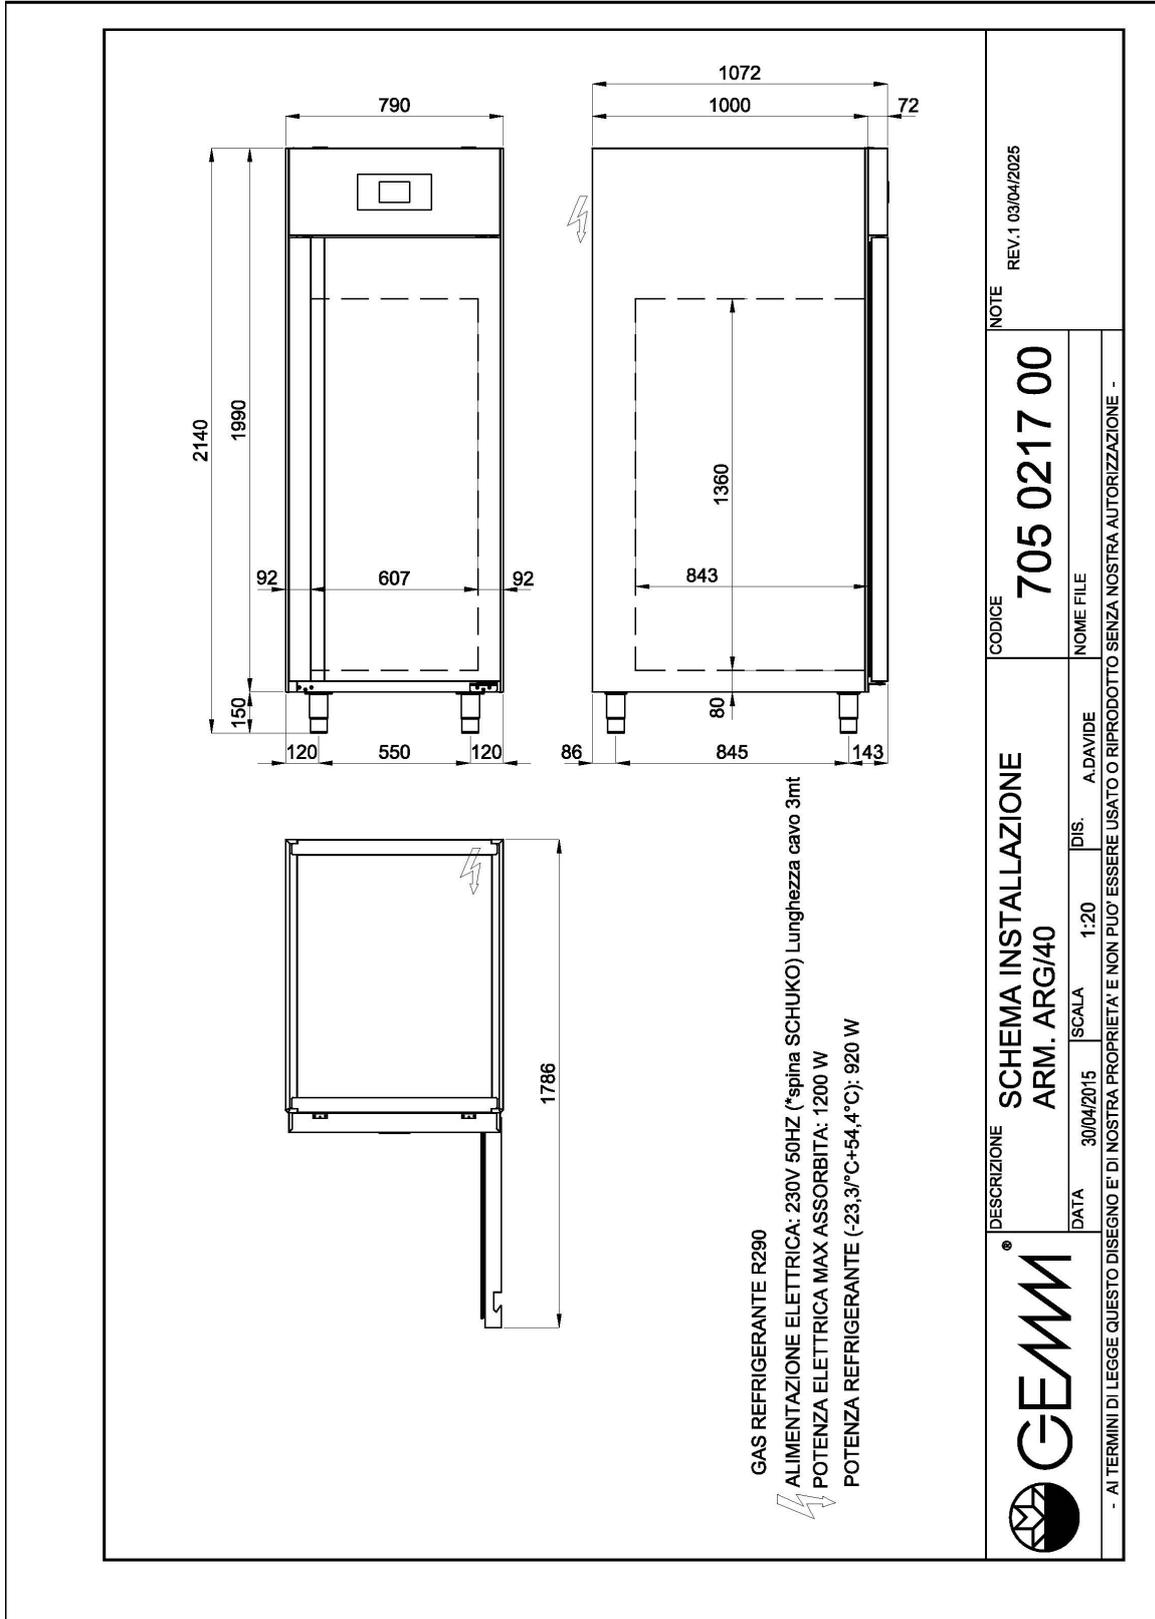|		
	Pair of runners for cm 60x80 shelf	45020511
	Rilsan cm 60x80 shelf	45020512
	Stainless steel 60x80 cm shelf	45020515
	Cabinet LED light	45020530
	Set of Ø 100 castors	45000540
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560
	Kit of 5 removable perforated stainless steel sliding shelves (available only for ARG/40)	45020560
	Removable perforated stainless steel sliding shelf, complete with pair of guides (available only for ARG/40)	45020563
	Prearranged version with valve system for low temperature equipment (deduction)	

GEMM®

790

1072

1000

72

2140

1990

92 607 92

150

120 550 120

86 845 143

1360

843

80

1786

GAS REFRIGERANTE R290

ALIMENTAZIONE ELETTRICA: 230V 50HZ (*spina SCHUKO) Lunghezza cavo 3mt

POTENZA ELETTRICA MAX ASSORBITA: 1200 W

POTENZA REFRIGERANTE (-23,3/°C+54,4°C): 920 W

DESCRIZIONE	SCHEMA INSTALLAZIONE ARM. ARG/40		CODICE	705 0217 00
DATA	30/04/2015	SCALA	1:20	DIS.	A.DAVIDE	NOME FILE	

NOTE   REV.1 03/04/2025

- AI TERMINI DI LEGGE QUESTO DISEGNO E' DI NOSTRA PROPRIETA' E NON PUO' ESSERE USATO O RIPRODOTTO SENZA NOSTRA AUTORIZZAZIONE -

ARG/40

GEMM®

ECOLABEL: