

## PASTRY

### PASTRY CABINETS

Model: ADP/40H


Code: 45011115

#### *DELICE PLUS*

PASTRY "HIGH HUMIDITY" UPRIGHT CABINET WITH 60-90% HUMIDITY CONTROL, 40 TRAYS - High humidity pastry refrigerated cabinet for 40 600x400 trays for fresh pastry products. Electronic humidity probe for humidity control. Available also prearranged for remote condensing unit with valve system.

- Construction: made in stainless steel
- "Overcooling", "energy saving" and "extra humidity" functions
- Internal capacity: 40 600x400 mm trays
- Position of technical compartment: on top
- Refrigeration type: "Gentle" cooling system with indirect/soft ventilation
- Control board panel: 2.8" LCD digital touch control
- Prearranged to be installed on plinth
- Defrosting system: automatic with hot gas
- Evaporation of condensation water: automatic
- 74 positions for shelves
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 20 pair of runners for 600x800 trays





## Technical Data:

|                              |          |                |
|------------------------------|----------|----------------|
| Doors                        | nr       | 1              |
| Capacity (net)               | l        | 608            |
| Capacity (gross)             | l        | 900            |
| Capacity of trays/shelves    | mm       | 40             |
| External dimensions (WxDxH)  | cm       | 79 x 108 x 214 |
| Insulation thickness         | mm       | 75             |
| Tray pitch                   | mm       | 16,5           |
| Rack positions               | nr       | 74             |
| Standard lock                |          | NO             |
| Standard light               |          | NO             |
| Temperature                  | °C       | -2/+8°C        |
| Condensing unit              |          | plug-in unit   |
| Gas                          |          | R290           |
| Ventilation control          |          | NO             |
| Humidity control             |          | NO             |
| Relative humidity            | ur%      | 60-90%         |
| Max abs. power               | W        | 1870*          |
| Cooling power                | W        | 1005*          |
| Input voltage                |          | 1x230V ~ 50Hz  |
| Energy efficiency class      |          | D              |
| Energy consumption kWh/24h   | kWh/24h  | 2,55           |
| Energy consumption kWh/year  | kWh/year | 932            |
| Energy efficiency index      |          | 57,9           |
| Climate class                |          | 5              |
| Packaging dimensions (WxDxH) | cm       | 87 x 114 x 226 |
| Volume (gross)               | mc       | 2,24           |
| Net weight                   | kg       | 188            |
| Gross weight                 | kg       | 198            |

\*Evap. -10°C, Cond +45°C

## DETAILS:



Custom color finish available on request



Racks with easily removable guides featuring 74 positions (16.5 mm pitch)



Control electronic board for the constant management of temperature and relative humidity



Electronic probe for relative humidity detection



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

## ACCESSORIES:



Pair of runners for cm 60x80 shelf

45020511

Rilsan cm 60x80 shelf

45020512

Stainless steel 60x80 cm shelf

45020515



Stainless steel cm 40x60x2h tray

42000560

Stainless steel cm 40x60x3h tray

42000562



Stainless steel cm 60x80x2h tray

45020520



Set of Ø 100 castors

45000540



Wi-Fi supervising system (overprice)


45000565



60Hz frequency

40200560

## INSTALLATION DIAGRAM:

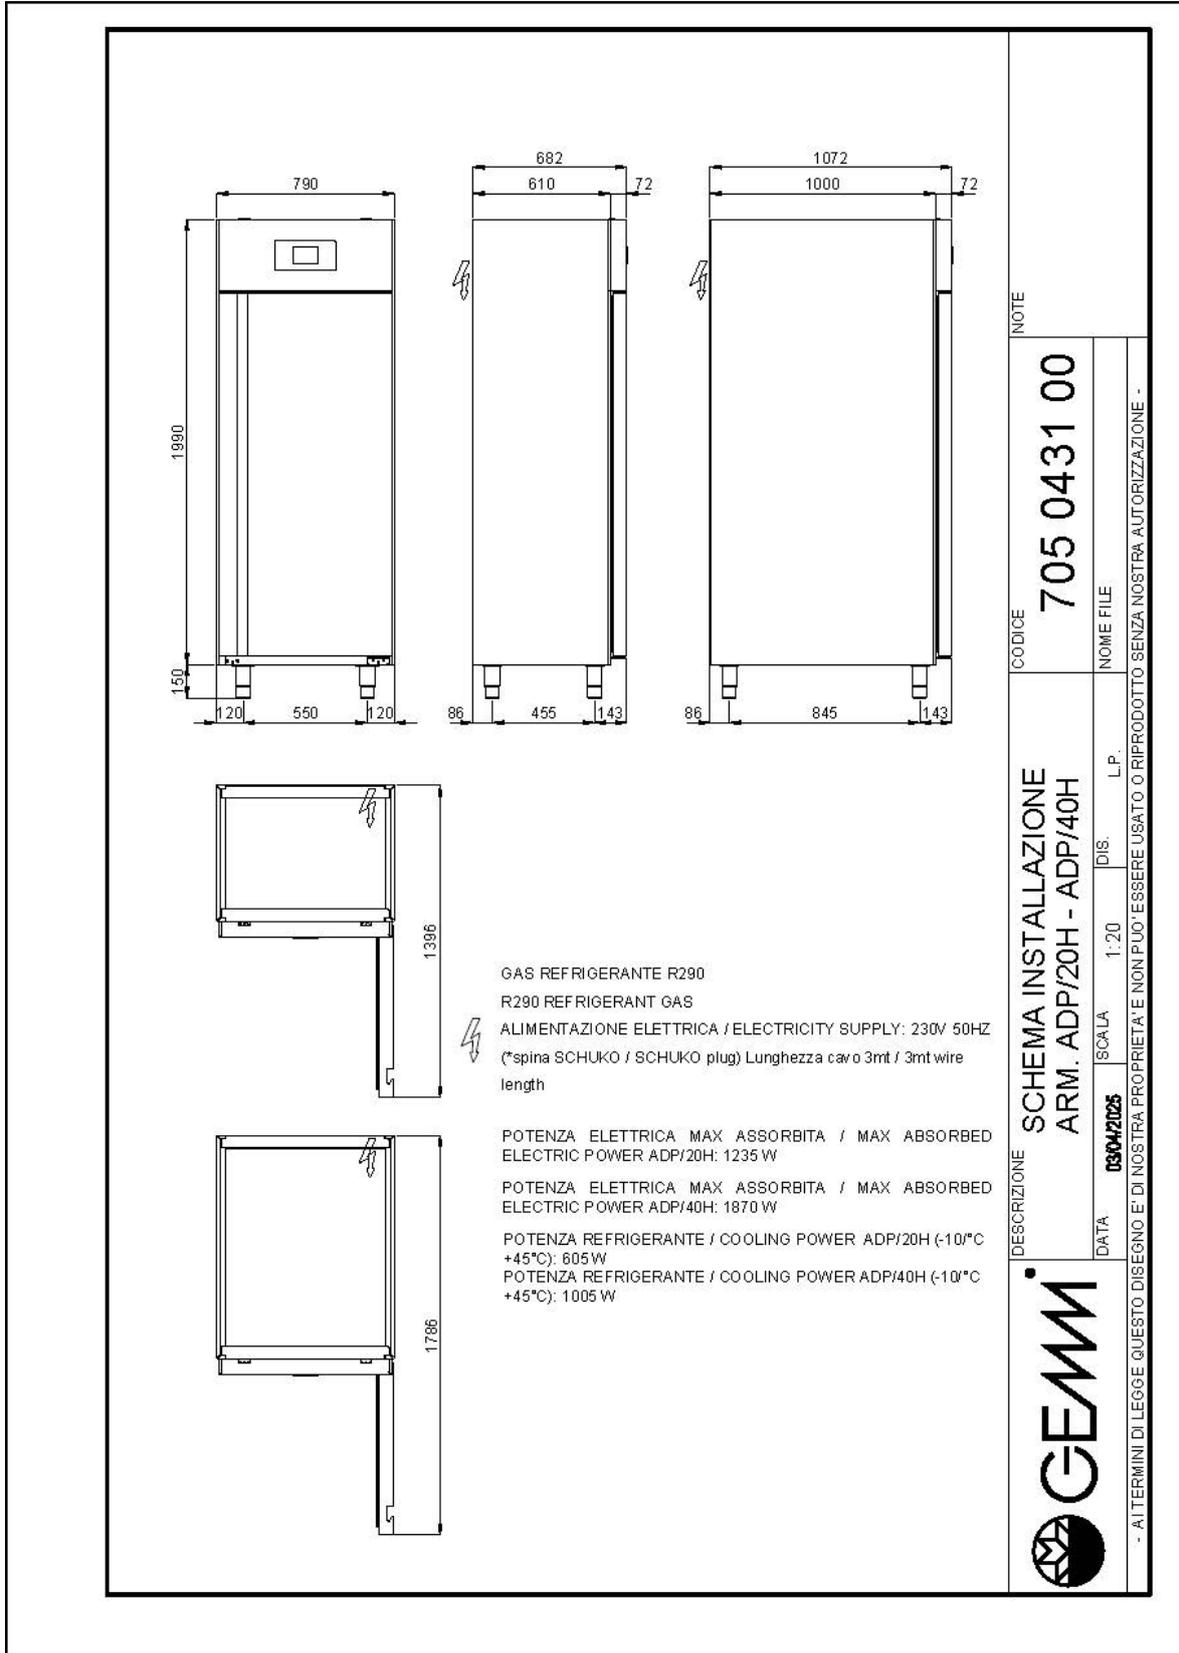

ADP/40H