

RETARDER PROOFING

RETARDER-PROOFING CABINETS

Model: AFLV/40


Code: 45020320

PLANET

RETARDER PROVER CABINET 40 TRAYS - Retarder-prover cabinet for 20 600x800 trays, electronic humidity probe for humidity control.

- Construction: made in stainless steel
- Multifunction and multilingual
- Internal capacity: 40 600x400 mm trays
- Position of technical compartment: on top
- Refrigeration type: "Gentle" cooling system with indirect/soft ventilation
- Control board panel: 5" TOUCH screen control board
- Backing delay function
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Supply with: 20 pair of runners for 600x800 trays





Technical Data:

Doors	nr	1
Capacity (net)	l	608
Capacity (gross)	l	900
Capacity of trays/shelves	mm	40 600x400
External dimensions (WxDxH)	cm	79 x 108 x 214
Insulation thickness	mm	75
Tray pitch	mm	16,5
Rack positions	nr	74
Evaporators	nr	1
Standard lock		NO
Standard light		NO
Temperature	°C	-10/+35°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		NO
Humidity control		NO
Relative humidity	ur%	60-90%
Max abs. power	W	1785***
Cooling power	W	1063*
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	87 x 114 x 226
Volume (gross)	mc	2,24
Net weight	kg	221
Gross weight	kg	231

*Evap. -10°C, Cond +45°C / *** Heating

DETAILS:



Humidity control with electronic probe



"Full control" electronic fans



"Gentle" refrigeration: Perforated back for indirect airflow



USB port for data uploads and downloads useful for recipes, parameters and HACCP datas



Racks with easily removable runners with 74 positions (16.5 mm pitch)




Ecological gas (R290)



5" TOUCH electronic board



Manual work cycle



Automatic work cycle



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



Pair of runners for cm 60x80 shelf

45020511

Rilsan cm 60x80 shelf

45020512

Stainless steel 60x80 cm shelf

45020515



Stainless steel cm 60x80x2h tray

45020520



Toughened glass door with internal LED light (overprice)

45020525



Set of Ø 100 castors

45000540



Wi-Fi supervising system for AFLV, BCT (overprice)


45000563



60Hz frequency

40200560

INSTALLATION DIAGRAM:

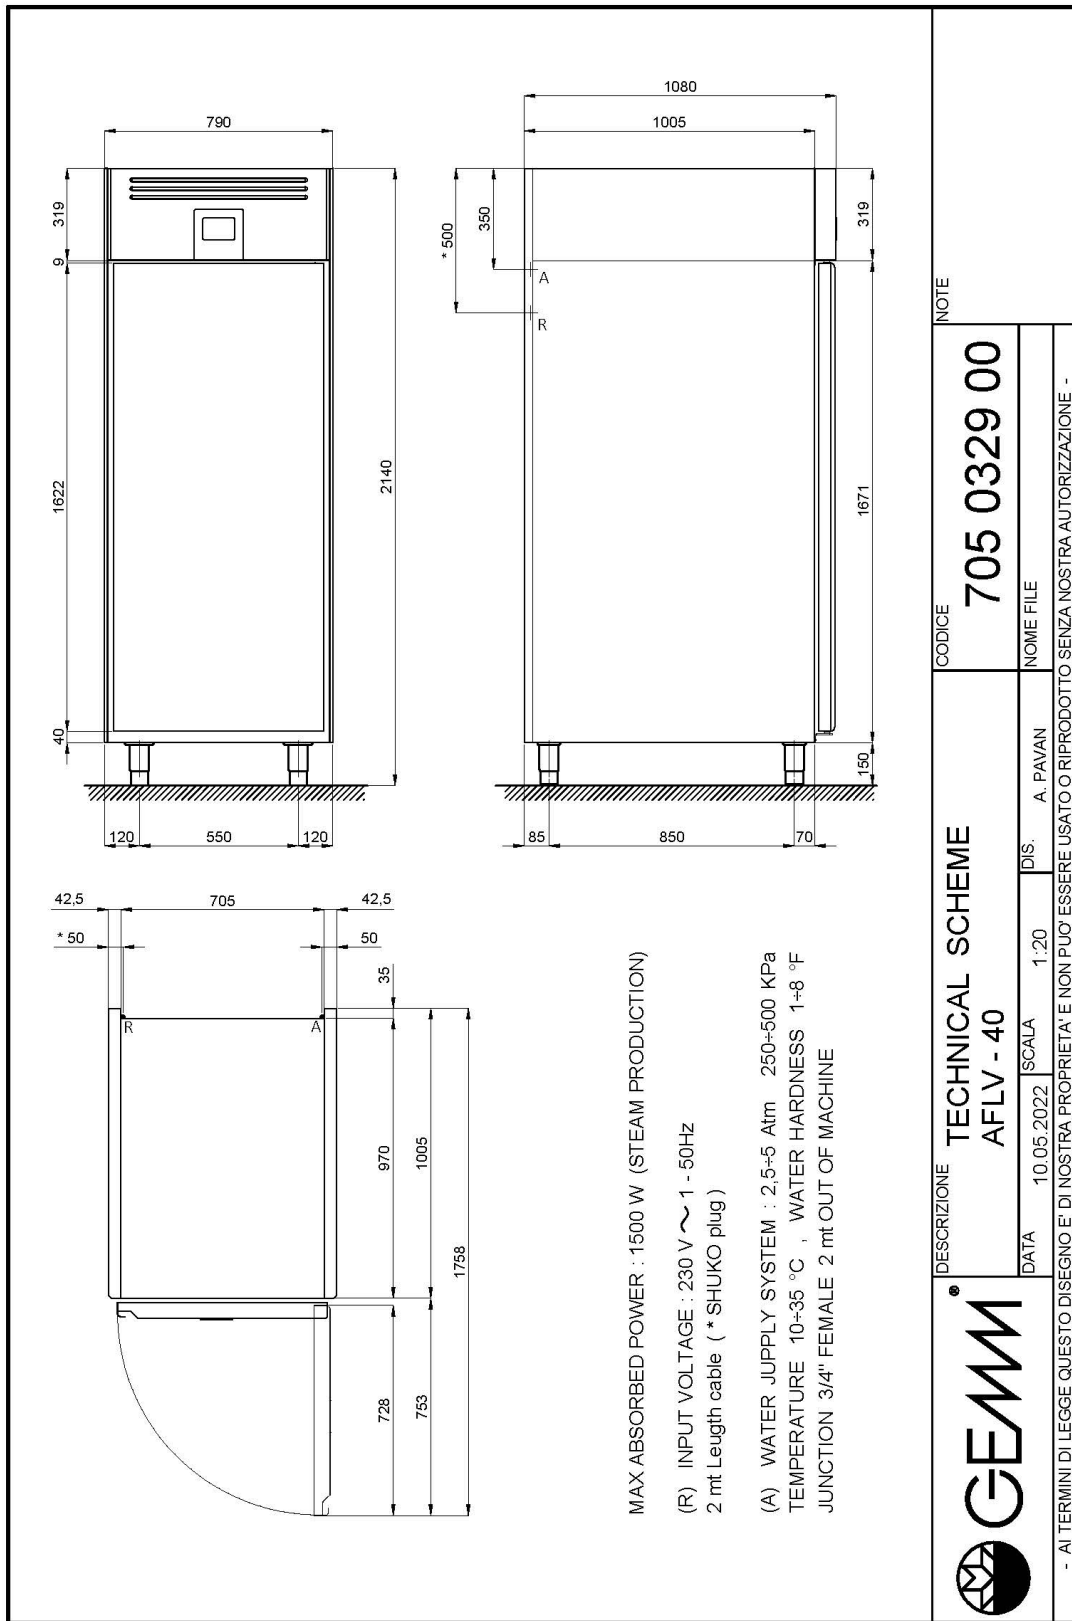

AFLV/40