

RETARDER PROOFING

PROOFING CABINETS

Model: ALEV/20

Code: 45020400

PLANET

PROVER CABINET 20 TRAYS 600x400 WITH HUMIDITY CONTROL MAX 90% - Prover cabinet with control of temperature, leavening time and relative humidity. Pre-set program: +40°C (temperature), 90% (humidity).

- Construction: made in stainless steel
- Internal capacity: 20 600x400 mm trays
- Position of technical compartment: on top
- Control board panel: 2.8" touch control panel, digital display
- Evaporation of condensation water: automatic
- Supply with: 20 pair of runners for 600x400 trays





Technical Data:

Doors	nr	1
Capacity (net)	l	304
Capacity (gross)	l	500
Capacity of trays/shelves	mm	20 600x400
External dimensions (WxDxH)	cm	79 x 69 x 214
Insulation thickness	mm	75
Tray pitch	mm	16,5
Rack positions	nr	74
Standard lock		NO
Standard light		NO
Temperature	°C	+40°C
Ventilation control		NO
Humidity control		NO
Relative humidity	ur%	max 90%
Max abs. power	W	2100***
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	87 x 77 x 226
Volume (gross)	mc	1,51
Net weight	kg	125
Gross weight	kg	135

*** Heating

DETAILS:



Humidity control with electronic probe



Racks with easily removable runners with 74 positions (16.5 mm pitch)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Humidity control with electronic probe



Racks with easily removable runners with 74 positions (16.5 mm pitch)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



Pair of runners for cm 60x40 tray

45020503



Rilsan cm 60x40 shelf

45020550



Stainless steel cm 60x40 shelf

45100242



Stainless steel cm 40x60x2h tray

42000560

Stainless steel cm 40x60x3h tray

42000562



Toughened glass door with internal LED light (overprice)

45020525



Set of Ø 100 castors

45000540



Wi-Fi supervising system for AFLV, BCT (overprice)


45000563



60Hz frequency

40200560

INSTALLATION DIAGRAM:

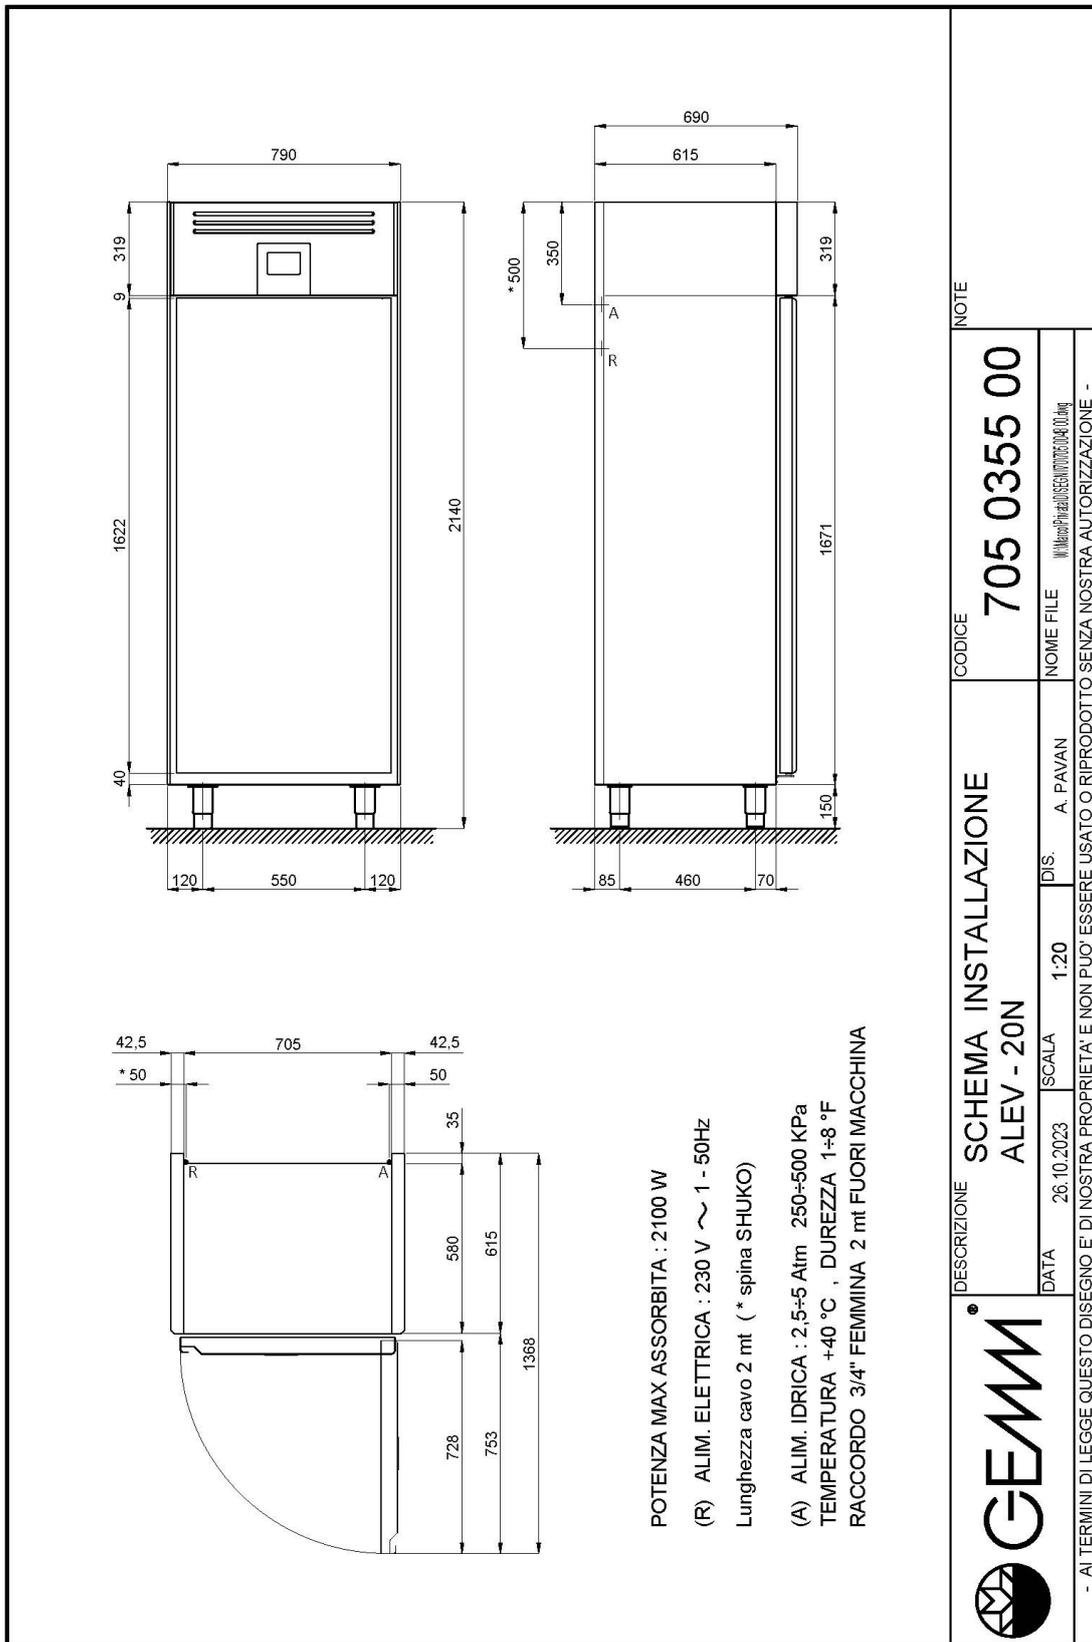

ALEV/20