

RETARDER PROOFING

PROOFING CABINETS

Model: ALEV/40


Code: 45020420

PLANET

PROVER CABINET 20 TRAYS 600x800 WITH HUMIDITY CONTROL MAX 90% - Prover cabinet with control of temperature, leavening time and relative humidity. Pre-set program: +40°C (temperature), 90% (humidity).

- Construction: made in stainless steel
- Internal capacity: 40 600x400 mm trays
- Position of technical compartment: on top
- Control board panel: 2.8" touch control panel, digital display
- Evaporation of condensation water: automatic
- Supply with: 20 pair of runners for 600x800 trays





Technical Data:

Doors	nr	1
Capacity (net)	l	608
Capacity (gross)	l	900
Capacity of trays/shelves	mm	40 600x400
External dimensions (WxDxH)	cm	79 x 108 x 214
Insulation thickness	mm	75
Tray pitch	mm	16,5
Rack positions	nr	74
Standard lock		NO
Standard light		NO
Temperature	°C	+40°C
Ventilation control		NO
Humidity control		NO
Relative humidity	ur%	max 90%
Max abs. power	W	2100***
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	87 x 114 x 226
Volume (gross)	mc	2,24
Net weight	kg	179
Gross weight	kg	189

*** Heating

DETAILS:



Humidity control with electronic probe



Racks with easily removable runners with 74 positions (16.5 mm pitch)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Humidity control with electronic probe



Racks with easily removable runners with 74 positions (16.5 mm pitch)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



Pair of runners for cm 60x80 shelf

45020511

Rilsan cm 60x80 shelf

45020512

Stainless steel 60x80 cm shelf

45020515



Stainless steel cm 60x80x2h tray

45020520



Toughened glass door with internal LED light (overprice)

45020525



Set of Ø 100 castors

45000540



Wi-Fi supervising system for AFLV, BCT (overprice)


45000563



60Hz frequency

40200560

INSTALLATION DIAGRAM:

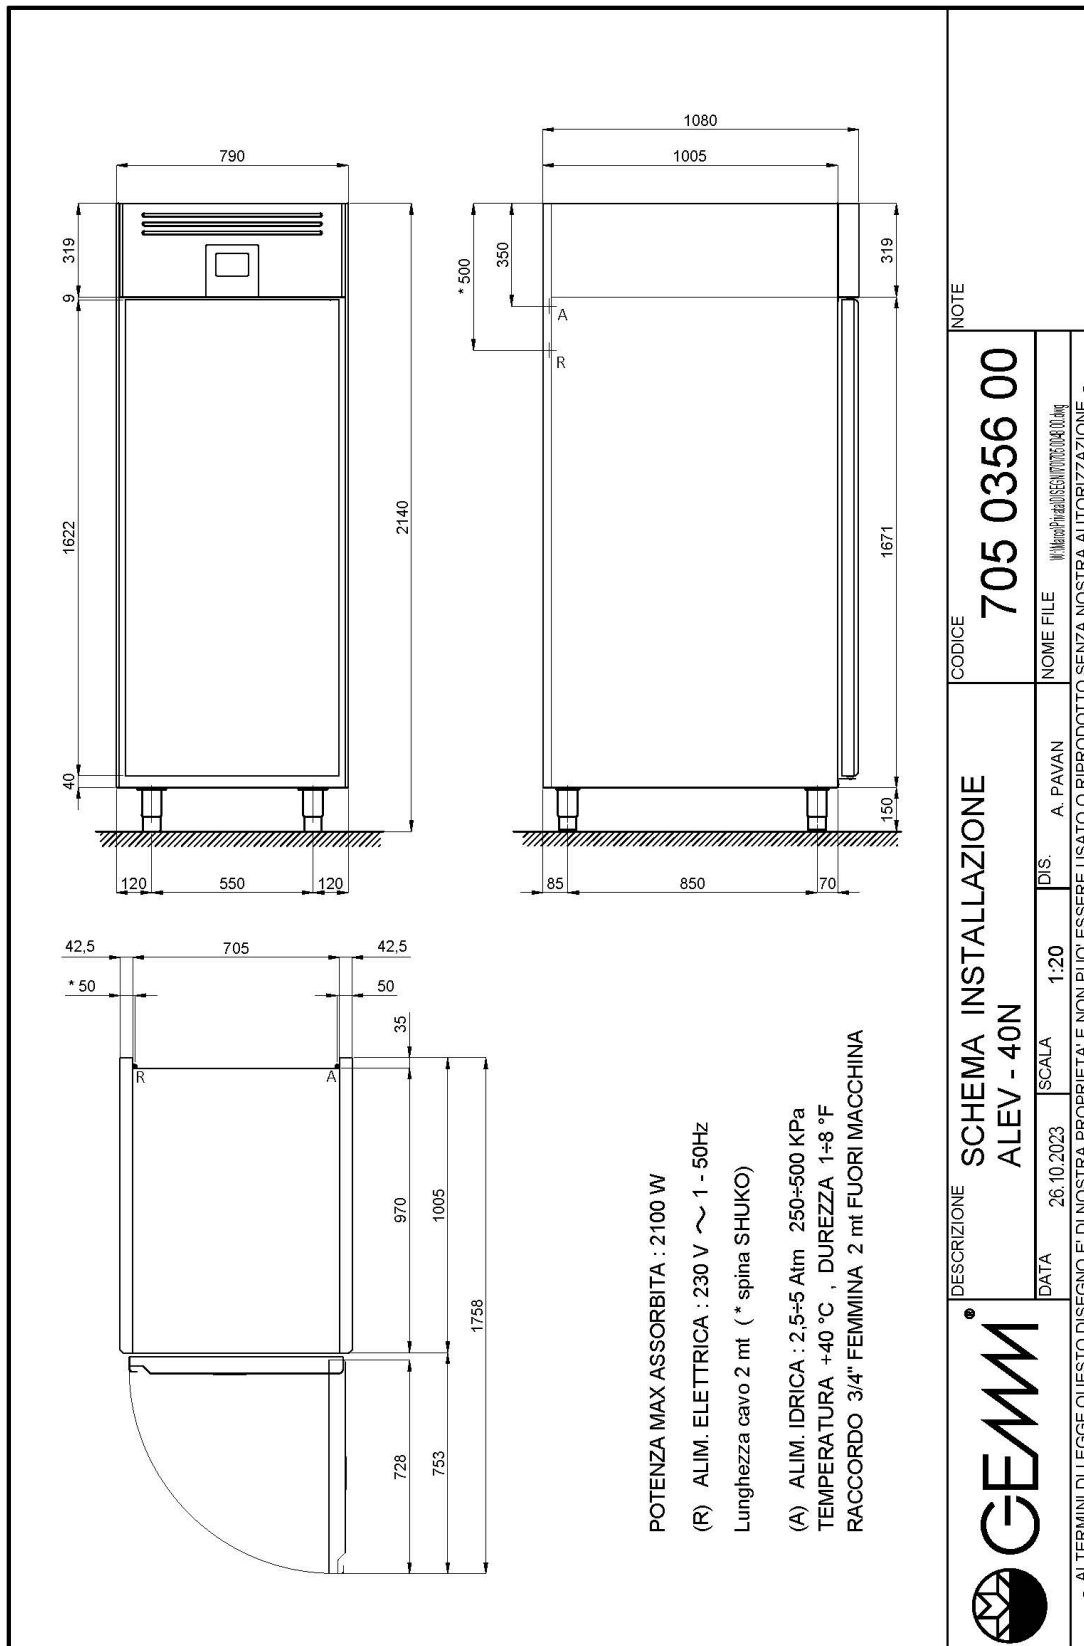

ALEV/40