

**ICE CREAM|PASTRY|PROFESSIONAL KITCHENS****BLAST CHILLERS/SHOCK FREEZERS FOR TROLLEYS****Model: BCC/4008****Code: 45100420****NEW RUNNER**

**BLAST CHILLER / SHOCK FREEZER FOR 1 GN 2/1 - 600X800 TROLLEY** - The MAXI range of blast chillers / shock freezers for trolleys is designed to meet the rapid chilling needs of medium- to large-scale laboratories, from catering facilities to semi-industrial pastry and bakery labs. Chilling from +90°C to +3°C in 90 minutes and freezing from +90°C to -18°C in 240 minutes, with a minimum air temperature of -40 °C. 7" touchscreen control panel with remote Wi-Fi supervision via GEMM-Cloud. Core probe, USB port and GEMM-Cloud come as standard.



- Construction: internal finish in AISI 304 stainless steel
- 70 mm thick insulating panels made by injecting CFC- and HCFC-free expanded polyurethane (43 kg/m<sup>3</sup>) between two AISI 304 stainless steel sheets, with a thermal transmittance of U = 0.23 W/m<sup>2</sup>K
- Reinforced, insulated, and R12-rated anti-slip floor made of 15/10 thick AISI 304 stainless steel, with trolley entrance ramp.
- Internal capacity: 1 GN 2/1 or 600x800 trolley
- Position of technical compartment: on top
- Refrigeration type: chilling from +90°C to +3°C in 90 minutes and freezing from +90°C to -18°C in 240 minutes, reaching minimum air temperature -40°C
- Control board panel: 7" TOUCH screen control board
- Special cycles: pre-cooling, ice cream hardening, drying, fish sanitization, bottle cooling
- Defrosting system: with hot gas
- Evaporation of condensation water: condensation drain pipe (prearrange water drain)
- Machine supplied assembled
- Equipment suitable for floor recessed installation
- Supply with: core probe, USB, GEMM-Cloud Wi-Fi supervising system
- Not included: trolleys, piping for connection to the condenser unit, and gas charging



### Technical Data:

|                              |    |                                       |
|------------------------------|----|---------------------------------------|
| Doors                        | nr | 1                                     |
| Trolley capacity             | nr | 1 GN 2/1/60x80                        |
| External dimensions (WxDxH)  | cm | 89 x 132 x 242                        |
| Insulation thickness         | mm | 70                                    |
| Internal dimensions (WxDxH)  | cm | 71 x 86 x 187                         |
| Evaporators                  | nr | 1                                     |
| Standard lock                |    | YES                                   |
| Standard light               |    | NO                                    |
| Yield* chilling / freezing   | kg | +90/+3°C = Kg 95<br>+90/-18°C = Kg 75 |
| Condensing unit              |    | plug-in unit                          |
| Compressor power             | Hp | 3                                     |
| Gas                          |    | R452A                                 |
| Ventilation control          |    | YES                                   |
| Humidity control             |    | NO                                    |
| Max abs. power               | W  | 4999*                                 |
| Cooling power                | W  | 3980**                                |
| Input voltage                |    | 3x400V ~ 50Hz                         |
| Climate class                |    | 5                                     |
| Packaging dimensions (WxDxH) | cm | 100 x 155 x 256                       |
| Volume (gross)               | mc | 4,05                                  |
| Net weight                   | kg | 477                                   |
| Gross weight                 | kg | 522                                   |

\*Evap. -10°C, Cond. +45°C / \*\*Evap. -23,3 Cond. +54,4°C

Ambient temp. +30°C loading sample according to EN 17032:2018

### FEATURES OF COOLING SYSTEM AND COMPONENTS:

- Compensation valve.
- No. 1 vertical evaporator with high heat exchange coefficient, multicircuit, with anticorrosion cataphoresis treatment, which thanks to the air conveyors guarantees high performance avoiding food dehydration.
- Evaporators equipped with 3 fans each, ensuring uniform cooling of the product on the trolley.
- Air speed: 0.7-7 m/s - Variable through the controller of the shock freezer.
- Air flow per evaporator: 10,500 m<sup>3</sup>/h.
- Hot gas defrost for evaporators to improve defrost quality and reduce time. Automatic defrost does not activate during the cycle but only during the storage phase to avoid compromising the product inside.
- Evaporator walls accessible for easy cleaning and maintenance.
- Instant fan stop when the door is opened.
- Internal stainless steel bumpers provided for proper trolley positioning.
- Provided needle probe for core temperature control of the product with "L" shaped handle.

- Open 3.0 Hp high-reliability condensing unit with BITZER compressor.
- High-performance condenser sized to ensure operation at ambient temperature of 40°C (climatic class 5).
- Variable condenser fan speed.

## **Control panel:**

- 7" touchscreen interface for simple and intuitive use.
- Multifunctional and multilingual electronic board.
- Blast chilling selectable by time or probe inserted into the core of the product.
- Selectable programs:
  - *Chilling*: positive temperature blast chilling (+3°C);
  - *Hard chilling*: 'fast' positive temperature blast chilling (+3°C in 90 minutes), during which the air temperature reaches -20°C;
  - *Freezing*: deep freezing or freezing (-18°C in 240 minutes), during which the air temperature reaches -40°C;
  - *Soft Freezing*: 'gentle' deep freezing (-18°C in 240 minutes), during which the air temperature reaches -40°C;
- Complete customization of all cycle parameters: time, ventilation level, cell temperature, etc.
- Possibility to create and save custom cycles for each type of food directly in the recipe book.
- Pre-set special cycles: pre-cooling, ice cream hardening, drying, fish sanitization, bottle cooling.
- Manual and automatic defrost.
- Customized blast chilling cycle: creation of blast chilling cycle in 4 distinct phases according to time, room temperature, product temperature and ventilation.
- Automatic storage function at the end of the cycle.
- Integrated recipe book with storage capacity for up to 100 recipes.
- Continuous diagnostics with real-time display and alarm logging.
- Recipe upload and download.
- Machine operation history in Excel and CSV file formats.
- Machine parameterization and updates.
- Data transfer with remote monitoring system via GemmCloud Wi-Fi connection.
- HACCP alarm downloads.
- Remote assistance.
- Firmware updates and HACCP data download from the cloud.

## DETAILS:



Home electronic board touch screen 7"



Special cycles screen



Control panel detail with tempered smoked glass



Heavy-duty handle in AISI 304 stainless steel



Core probe



Hinge detail for swing door



Reinforced stainless steel floor with internal bumper




Remote monitoring system via GEMM-Cloud Wi-Fi connection

## ACCESSORIES:

---

|   |   |          |
|---|---|----------|
| O.  | Ozone sterilizer kit for BCC/4008-4011-4014-6015 (overprice)                  | 45100912 |
| ❖   |   | 45100921 |
|  | 110 cm long stainless steel ramp BCC/4008 BCC/4011 BCC/4014(P)<br>(overprice) | 45100961 |
| ✳   | Thawing function for BCC/4008-4011 (overprice)                                |          |
| ⚡   | 60Hz frequency  | 40200560 |

INSTALLATION DIAGRAM:

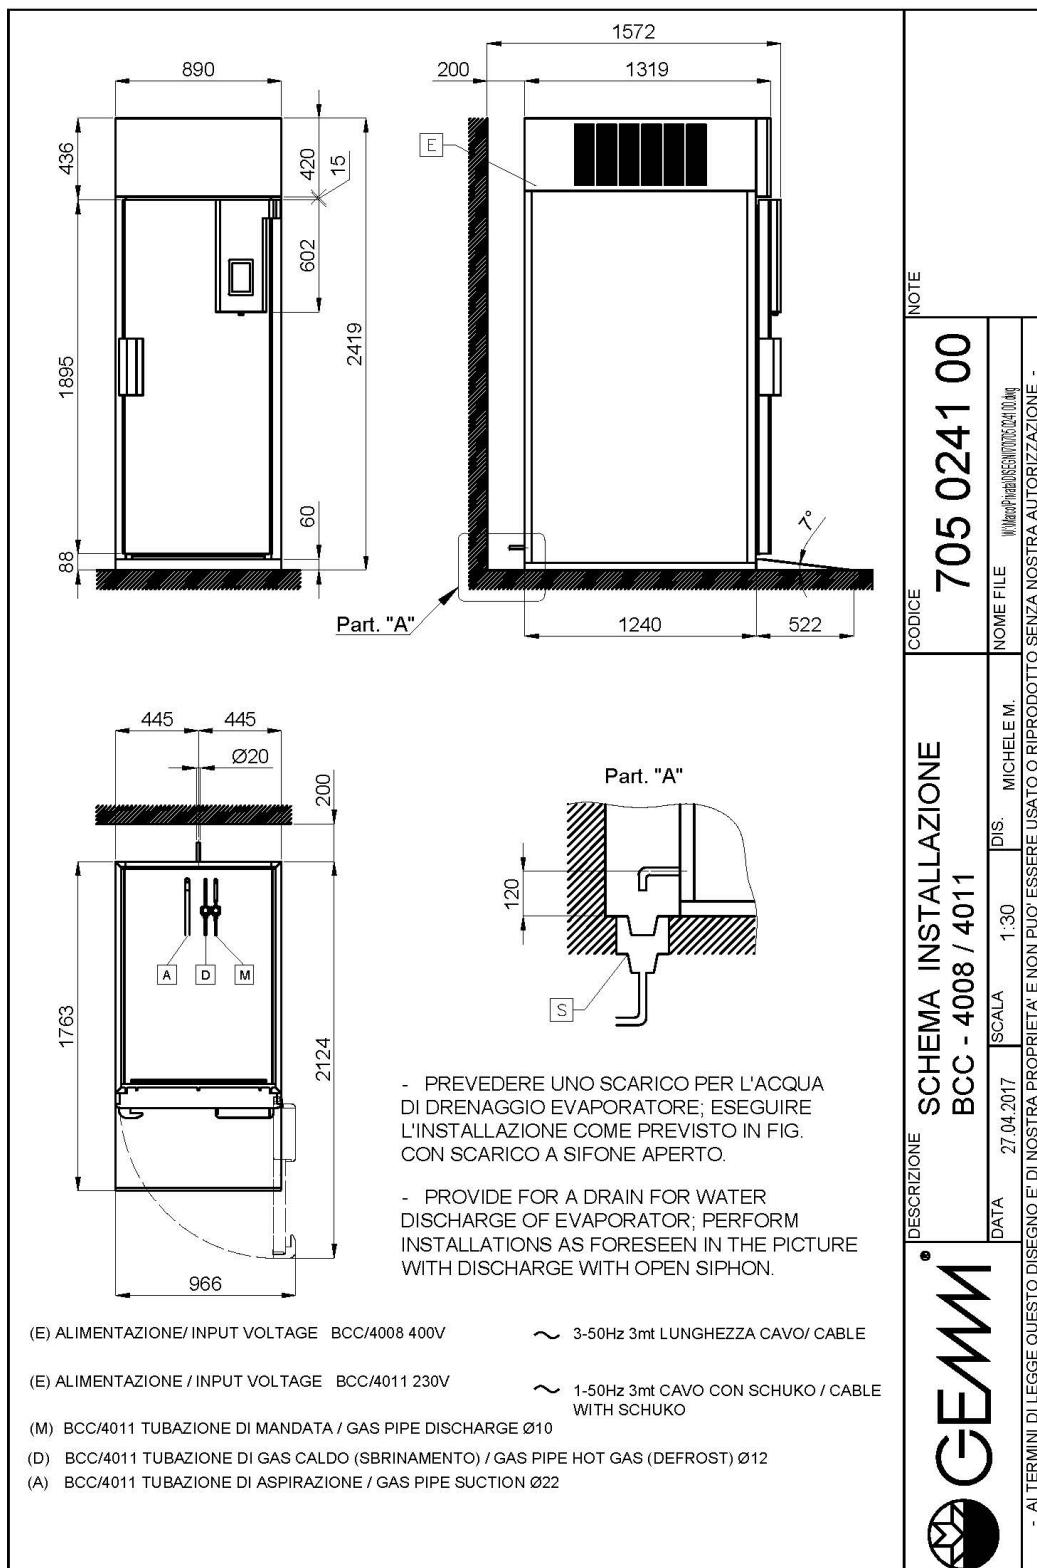

BCC/4008