

RETARDER PROOFING

RETARDER PROVERS ROOMS

Model: CL1/MINI+

Code: 48001015

PLANET

RETARDER PROOFER ROOM FOR 1 TROLLEY 600×800 –

"Compact" modular panel retarder proofer room complete with steam generator, 7" touch screen control panel with ventilation and humidity control in all phases, and remote Wi-Fi GEMM-Cloud supervision.

- Construction: external finish in grey PET sheet metal / internal finish in AISI 304 18/10 stainless steel lining
- Modular panels, 80 mm thick, insulation with CFC- and HCFC-free injected polyurethane foam
- Reinforced AISI 304 stainless steel drive-over floor, 20 mm thick; No. 1 trolley access ramp
- Internal capacity: 1 600x800 trolley
- Position of technical compartment: control panel and electrical system with front access
- Refrigeration type: "Gentle" cooling system with indirect/soft ventilation
- Control board panel: 7" TOUCH screen control board
- No. 1 hinged door, clear opening 70x175h cm (right-hand hinges); Automatically heated threshold frame and door with magnetic gasket; Internal LED lighting
- Defrosting system: automatic hot gas defrosting
- Evaporation of condensation water: automatic
- Machine supplied not assembled
- Equipment suitable for floor recessed installation
- Supply with: USB, GEMM-Cloud Wi-Fi supervising system
- Not included: trolleys





Technical Data:


Doors	nr	1
Trolley capacity	nr	1 600x800
External dimensions (WxDxH)	cm	96 x 117 x 260
Insulation thickness	mm	80
Internal dimensions (WxDxH)	cm	69 x 94+6 x 195
Standard lock		YES
Standard light		YES
Temperature	°C	-5/+40°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		YES
Humidity control		YES
Relative humidity	ur%	max 90%
Max abs. power	W	1500*
Cooling power	W	1100*
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	247 x 127 x 150
Gross weight	kg	400

*Evap. -10°C, Cond +45°C


FEATURES OF COOLING SYSTEM AND COMPONENTS:

CONTROL PANEL

- Programming and managing the proofing cycle is extremely easy and precise thanks to the 7" multifunction touch electronic control board. Intuitive and user-friendly, it allows you to set the phases of cooling, storage, warming, proofing, and holding, with the option to store up to 100 work programs and select from 7 languages. The electronic board ensures an ideal climate for any type of product by controlling temperature and relative humidity. It also provides immediate diagnostics through constant monitoring and display of operating parameters.

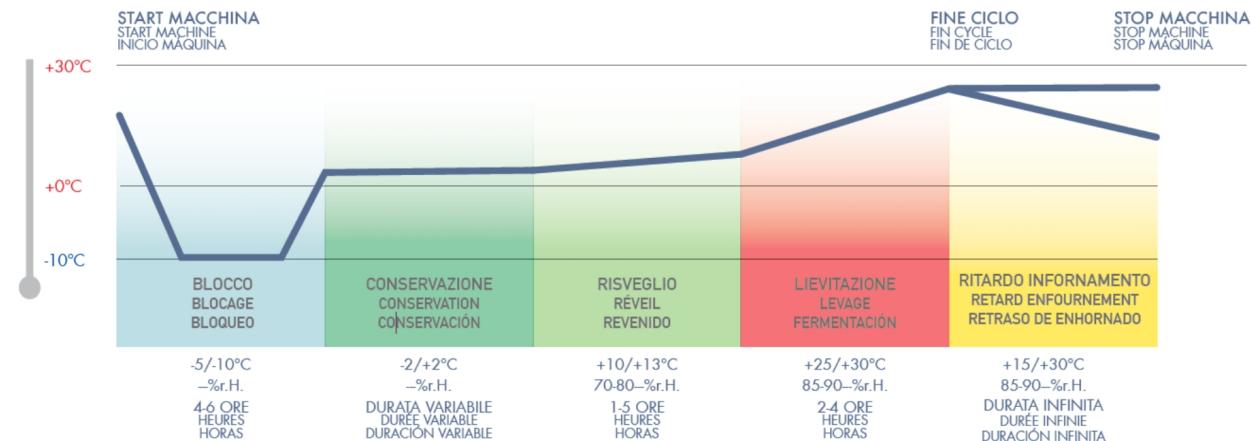

DETAILS:

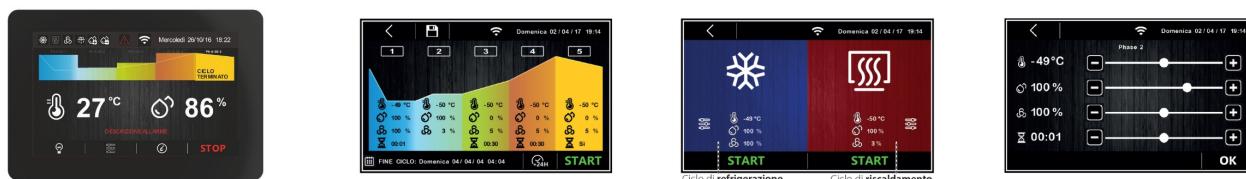

7" TOUCH electronic board

Automatic work cycle

Manual work cycle

The parameter setting menu offers the possibility to adjust the temperature, humidity percentage, fan speed, and interval duration.




Remote monitoring system via GEMM-Cloud
Wi-Fi connection

ACCESSORIES:

	Dictator device	48002030
	Glass window cm 40x40 for door (overprice)	48002040
	Glass window cm 40x160 for door (overprice)	48002045
	Left hinged door (overprice)	48002050
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

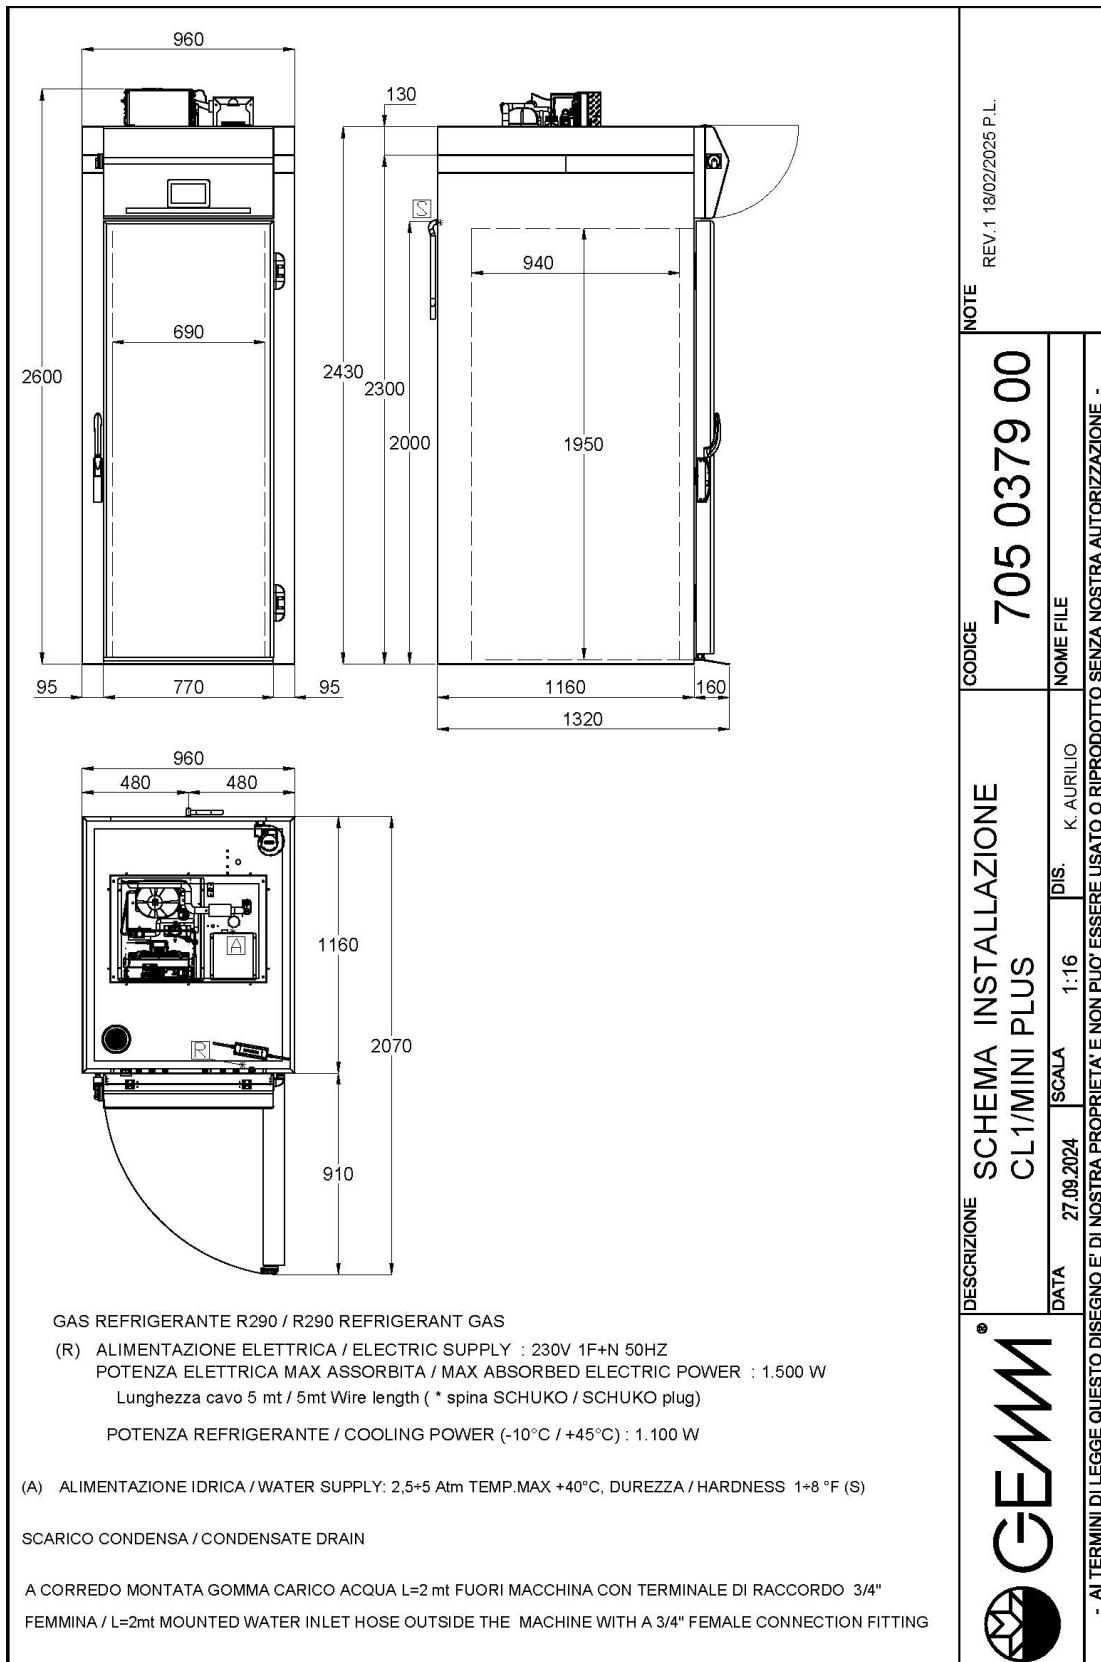

CL1/MINI+