

RETARDER PROOFING

RETARDER PROOFER ROOMS

Model: CL2/1119

Code: 48001030

PLANET

RETARDER PROOFER ROOM FOR 2 TROLLEYS 600×800 WITH RAMP – Modular panel retarder proofer room complete with steam generator, 7" touch screen control panel with ventilation and humidity control in all phases, and remote Wi-Fi GEMM-Cloud supervision.

- Construction: external finish in grey PET sheet metal / internal finish in AISI 304 18/10 stainless steel lining
- Modular panels, 80 mm thick, insulation with CFC- and HCFC-free injected polyurethane foam
- Reinforced AISI 304 stainless steel drive-over floor, 60 mm thick; No. 1 trolley access ramp
- Internal capacity: 2 600x800 mm trolleys
- Position of technical compartment: control panel and electrical system with front access
- Refrigeration type: "Gentle" cooling system with indirect/soft ventilation
- Control board panel: 7" TOUCH screen control board
- No. 1 hinged door, clear opening 80x197h cm (right-hand hinges); Automatically heated frame and threshold, and door with magnetic gasket; Internal LED lighting
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: condensation drain pipe (prearrange water drain)
- Machine supplied not assembled
- Equipment suitable for floor recessed installation
- Supply with: USB, GEMM-Cloud Wi-Fi supervising system
- Not included: trolleys, piping for connection to the condenser unit, and gas charging





Technical Data:

Doors	nr	1
Trolley capacity	nr	2 600x800
External dimensions (WxDxH)	cm	116 x 196 x 267 + 16
Insulation thickness	mm	80
Internal dimensions (WxDxH)	cm	80 x 170 x 197
Standard lock		YES
Standard light		YES
Temperature	°C	-10/+40°C
Condensing unit		remote condensing unit
Ventilation control		YES
Humidity control		YES
Relative humidity	ur%	max 90%
Max abs. power	W	2600*
Cooling power	W	2560*
Input voltage		3x400V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	258 x 173 x 167 120 x 80 x 116
Volume (gross)	mc	8,57
Net weight	kg	683
Gross weight	kg	745

*Evap. -10°C, Cond +45°C


FEATURES OF COOLING SYSTEM AND COMPONENTS:

FEATURES OF COOLING SYSTEM AND COMPONENTS

- No. 1 high thermal exchange coefficient multi-circuit evaporator with cataphoresis anti-corrosion treatment, equipped with air deflectors to ensure high performance.
- The evaporator unit is equipped with 2 fans Ø230, each ensuring uniform cooling of the product on the trolley.
- The evaporator defrosting is electric to improve defrost quality and reduce defrosting time. The automatic defrosting is not activated during the cycle but only during the storage phase to avoid compromising the product inside.
- Accessible evaporator casing to facilitate cleaning and maintenance of the evaporator/fan area.
- Fan lock when the door is opened.
- Open-type condensing unit with high reliability, equipped with hermetic/scroll compressor.
- The electrical panel on the condensing unit allows constant monitoring.
- High and low pressure alarms, compressor oil overheating, and motor thermal protection are displayed both on the equipment's electronic control board and the unit's indicator panel.
- High-performance condenser sized to operate at an ambient temperature of 40°C (climate class 5).
- Condenser fan speed is variable and self-regulating.
- No. 1 High-efficiency steam boiler 2000W with openable structure for easy maintenance. 3/4" water connection, steam production from 2 to 2.6 kg/h.

CONTROL PANEL

• Programming and managing the proofing cycle is extremely easy and precise thanks to the 7" multifunction touch electronic control board. Intuitive and user-friendly, it allows you to set the phases of cooling, storage, warming, proofing, and holding, with the option to store up to 100 work programs and select from 7 languages. The electronic board ensures an ideal climate for any type of product by controlling temperature and relative humidity. It also provides immediate diagnostics through constant monitoring and display of operating parameters.

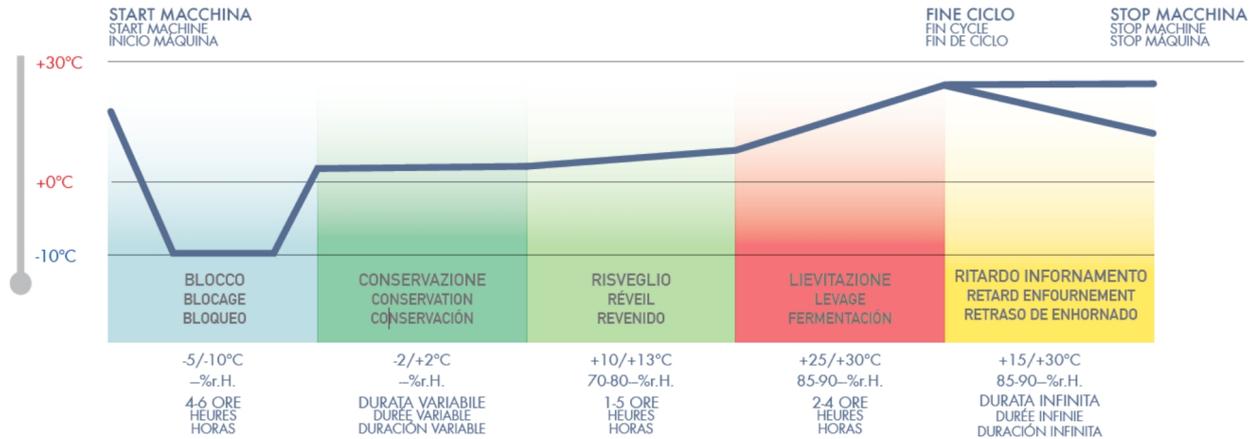

DETAILS:




7" TOUCH electronic board



Automatic work cycle




Manual work cycle

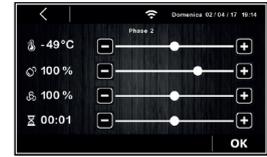

The parameter setting menu offers the possibility to adjust the temperature, humidity percentage, fan speed, and interval duration.



Electronic fans that optimize ventilation at every stage

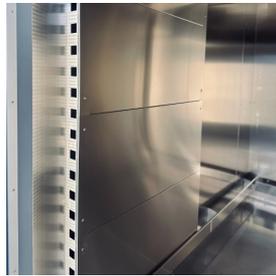

Enhanced evaporators, designed for CO2 and treated with cataphoresis to resist corrosion



High-efficiency steam boiler (steam production from 2-2.6 kg/h).



Internal lighting with LED lights



Reinforced stainless steel floor for trolleys and internal bumpers.




Door thickness detail



Hinge detail



Dictator for soft-closing and automatic door closure (on request).



Scheme for floor recessed installation



Remote monitoring system via GEMM-Cloud Wi-Fi connection

ACCESSORIES:



Standard door cm 80x197h (additional)

48002000



Dictator device

48002030



Glass window cm 40x40 for door (overprice)

48002040

Glass window cm 40x160 for door (overprice)

48002045



Left hinged door (overprice)

48002050

Stainless steel AISI 304 external finishing (overprice)

48002060



60Hz frequency

40200560

INSTALLATION DIAGRAM:

CELLA PREDISPOSTA PER GAS R448A-449A

(R) ALIMENTAZIONE ELETTRICA CELLA: 230V 50Hz
 POTENZA ELETTRICA ASSORBITA CELLA: max 2.600W

ALIMENTAZIONE ELETTRICA UNITA' CONDENSANTE: 400V 3F+N 50Hz
 POTENZA REFRIGERANTE (-10°C / +45°C): 2.560W

(A) ALIMENTAZIONE IDRICA: 2,5÷5 Atm TEMP. MAX. +40°C, DUREZZA 1÷8 °F

A CORREDO MONTATA GOMMA CARICO ACQUA L=2 mt FUORI MACCHINA
 CON TERMINALE DI RACCORDO 3/4" FEMMINA

ATTENZIONE!!! PREDISPORRE LO SCARICO DI CONDENZA

DESCRIZIONE		SCHEMA INSTALLAZIONE	
DATA		CL2/1119	
12.06.2024	SCALA	1:25	DIS.
		K. AURILIO	
CODICE		705 0368 00	
NOTE		REV.1 19/02/2025 P.L.	
- AI TERMINI DI LEGGE QUESTO DISEGNO E' DI NOSTRA PROPRIETA' E NON PUO' ESSERE USATO O RIPRODOTTO SENZA NOSTRA AUTORIZZAZIONE -			

CL2/1119