

BRERA

WINE LIBRARY

Model: WL6/422P

Code: 6000370


H 2200

REFRIGERATED WINE DISPLAY: 4 pass-through doors with 4 independent temperatures, maximum bottle capacity no. 512.

Technology, design, and high performance to enhance any environment. Made of AISI 304 stainless steel, it allows for optimal preservation of all types of wine by setting the temperature independently in each compartment, +4/+16°C. With a customizable color finish, the full glass doors shine with internal white LED lighting (or warm light upon request).



- Construction: made in stainless steel
- Internal capacity: 512 bottles
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.2" touch control panel, digital display
- "White/cold" led light (6000K); on request "Warm" led light (2700K)
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Machine supplied not assembled
- Optional equipment: painted color finishing on request
- Supply with: led lighting dimmer
- Not included: bottle-handlings



Technical Data:

| | | |
|------------------------------|-----|------------------------------|
| Doors | nr | 8 |
| External dimensions (WxDxH) | cm | 330 x 55 x 220 |
| Insulation thickness | mm | 50 |
| Standard lock | | YES |
| Standard light | | SI, 6000K (on request 2700K) |
| Temperature | °C | +4/+16°C |
| Condensing unit | | plug-in unit |
| Gas | | R290 |
| Noise level | dba | <43dba |
| Ventilation control | | NO |
| Humidity control | | NO |
| Max abs. power | W | 1720* |
| Cooling power | W | 1960* |
| Input voltage | | 1x230V ~ 50Hz |
| Climate class | | 4 |
| Packaging dimensions (WxDxH) | cm | 265 x 65 x 192 |
| | | 265 x 65 x 192 |
| | | 210 x 35 x 91 |
| | | 210 x 35 x 91 |
| | | 80 x 50 x 55 |
| | | 80 x 50 x 55 |
| Volume (gross) | mc | 8,8321 |
| Net weight | kg | 835 |
| Gross weight | kg | 910 |

*Ambient temp. +26°C / Evap. -10°C, cond. +45°C

DETAILS:



Stainless steel door handle detail



Custom color finishing (on request)



Glass sides (upon request)



SC5/03 Flat bottle structure in plexiglas



SI5/04 Inclined bottle shelf in plexiglas



SR5/01 perforated stainless steel panel, no. bottles capacity



ST5/02 Stainless steel tube structure



Ecological gas (R290)




Remote monitoring system
via GEMM-Cloud Wi-Fi
connection (on request)

ACCESSORIES:

| | | |
|---|---|----------|
|  | K522/01 Kit 4 stainless steel shelves (SR5/01) - bottles capacity: no. 128 | 60000500 |
|  | K522/02 Kit 3 stainless steel shelves (SR5/01) + 2 stainless steel bottle handling tubes (ST5/02) - bottles capacity: no. 108 | 60000510 |
|  | K522/03 Kit 3 stainless steel shelves (SR5/01) + 2 inclined bottle-handlings (SI5/04) - bottles capacity: no. 110 | 60000520 |
|  | K522/04 Kit 2 stainless steel shelves (SR5/01) + 4 plexiglass flat bottle-handlings (SC5/03)- bottles capacity: no. 92 | 60000530 |
|  | K522/05 Kit 2 stainless steel shelves (SR5/01) + 2 plexiglass flat bottle-handlings (SC5/03) + 2 inclined bottle-handlings (SI5/04)- bottles capacity: no. 92 | 60000540 |
|  | SR5/01 Stainless steel shelf (capacity no. 32 bottles) | 60000700 |
|  | ST5/02 Stainless steel bottle handling tubes (capacity no. 6 bottles) | 60000705 |
|  | SC5/03 Plexiglass flat bottle-handlings (capacity no. 7 bottles) | 60000710 |
|  | SI5/04 Inclined bottle-handling (capacity no. 7 bottles) | 60000715 |
|  | Glass sides for WL6/220 (overprice) | 60000750 |
|  | Stainless steel 25x25 pipes structure WL6 H220 (glass sides) | 60000743 |
|  | Stainless steel shelf for "standing" bottles (28 bottles' capacity) for glass sides structure | 60000770 |
|  | Stainless steel shelf for "horizontal" bottles (22 bottles' capacity) for glass sides structure | 60000780 |
|  | Stainless steel shelf for "tilted" bottles (12 bottles' capacity) for glass sides structure | 60000790 |
|  | Color finishing WL6 3-4 doors (overprice) | 60000860 |
|  | Condensing unit 1/4 HP for each WL compartment (> 10 meters distance) | 40200180 |
|  | Condensing unit 1/6 HP for each WL compartment (≤ 10 meters distance) | 40200184 |
|  | Wi-Fi supervising system (overprice) | 45000565 |
|  | 60Hz frequency | 40200560 |

INSTALLATION DIAGRAM:

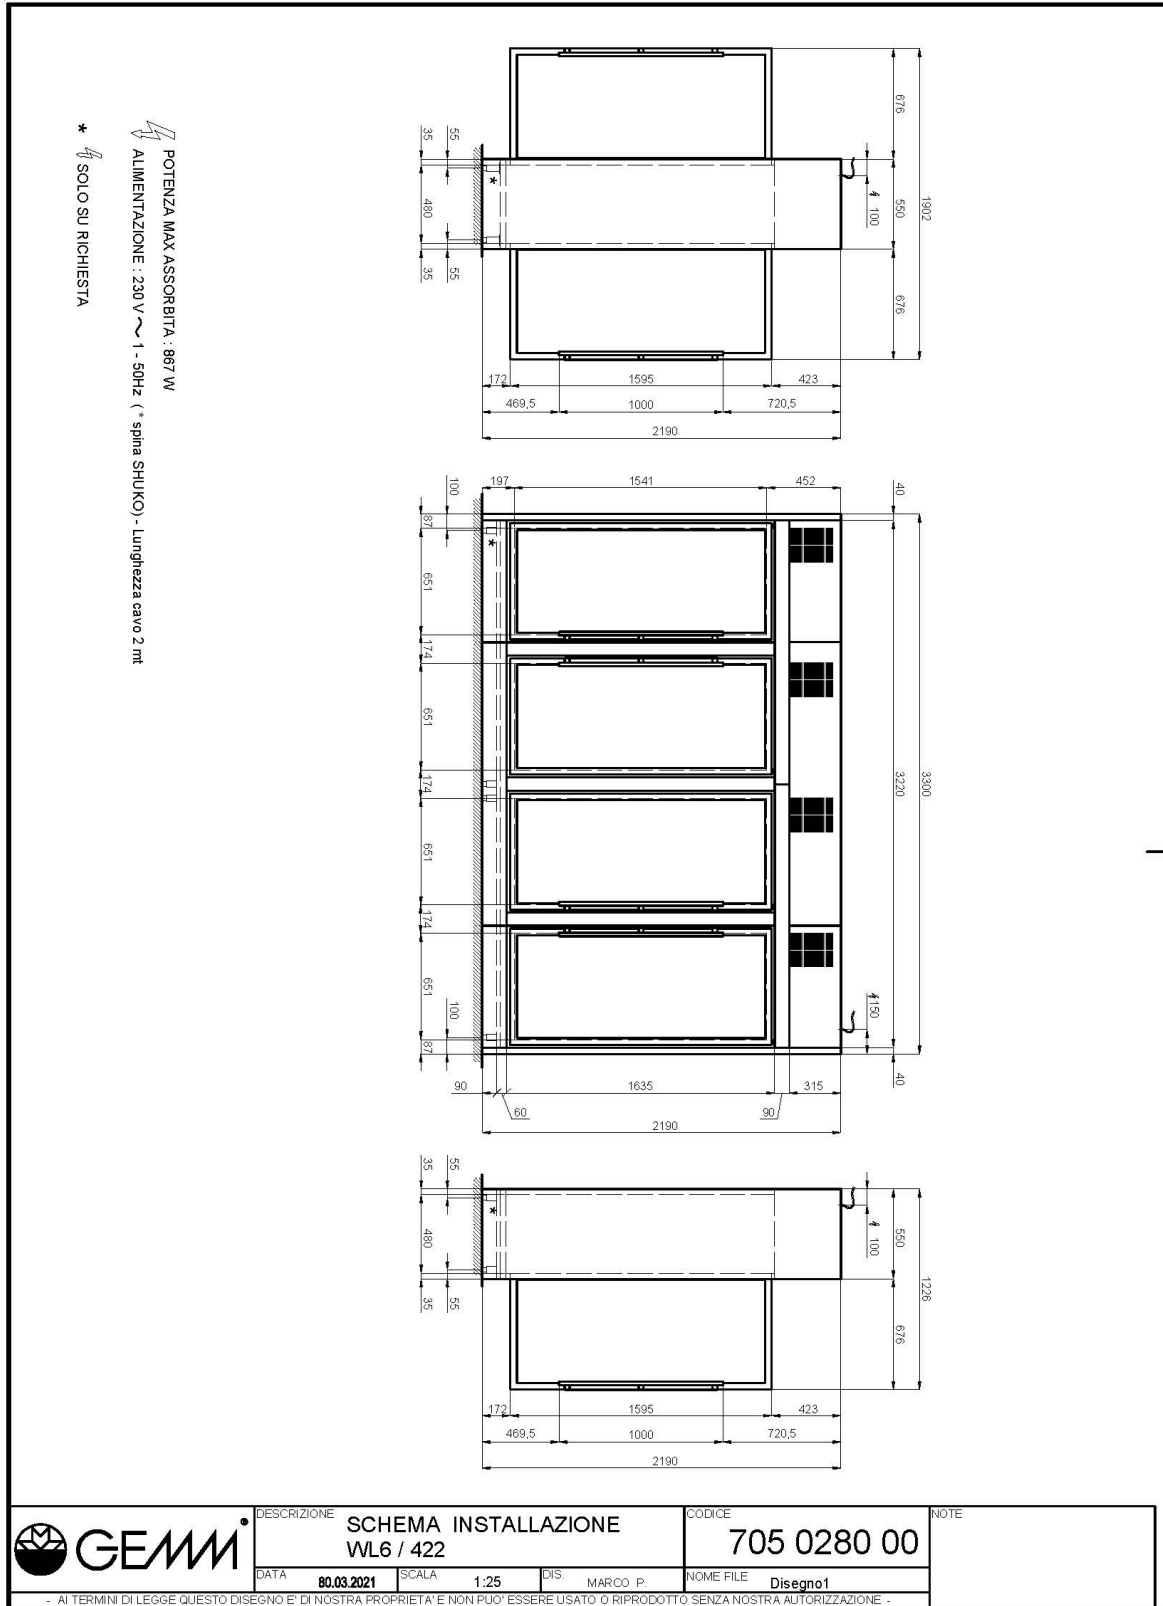

WL6/422P