PROFESSIONAL KITCHENS|WINE

WINE LIBRARY **Model: WL6/226S** **Code: 60000420**

WINE LIBRARY

REFRIGERATED WINE DISPLAY: 2-door wall version with 2 independent temperatures, maximum bottle capacity of 256. Technology, design, and high performance to enhance any environment. Made of AISI 304 stainless steel, it allows for optimal preservation of all types of wine by setting the temperature independently in each compartment, +4/+16°C. With a customizable color finish, the full glass doors shine with internal white LED lighting (or warm light upon request).

- Construction: made in stainelss steel
- Internal capacity: 320 bottles
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.2" touch control panel, digital display
- "White/cold" led light (6000K); on request "Warm" led light (2700K)
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Machine supplied not assembled
- Optional equipment: painted color finishing on request
- Supply with: led lighting dimmer
- Not included: bottle-handlings

GEMM®



Technical Data:

Doors	nr	2
External dimensions (WxDxH)	cm	165 x 55 x 260
Insulation thickness	mm	50
Standard lock		YES
Standard light		SI, 6000K (on request 2700K)
Temperature	°C	+4/+16°C
Condensing unit		plug-in unit
Gas		R290
Noise level	dba	<43dba
Ventilation control		NO
Humidity control		NO
Max abs. power	W	860*
Cooling power	W	980*
Input voltage		1x230V ~ 50Hz
Climate class		4
Packaging dimensions (WxDxH)	cm	265 x 65 x 192 210 x 35 x 91 80 x 50 x 55 80 x 50 x 55
Volume (gross)	mc	4,41605
Net weight	kg	373
Gross weight	kg	438

*Ambient temp. +26°C / Evap. -10°C, cond. +45°C

DETAILS:

Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

Led lighting dimmer with remote control

Stainless steel door handle

Internal white led light (on request warm led light)

2.2" touch control panel with digital display



Door lock with key

RAL color finish (on request)



Front anti-condensation heating element

Low-E double glazing (reduction of solar radiation and heat loss)

Glass sides (on request)

Glass sides (on request)

SR5/01 perforated stainless steel panel (max 32 bottles)

ST5/02 Stainless steel tube structure (max 6 bottles)

SC5/03 Flat bottle structure in plexiglas (max 7 bottles)

SI5/04 Inclined bottle shelf in plexiglas (max 7 bottles)

ACCESSORIES:

	Kit 5 stainless steel shelves (SR5/01) Bottles capacity: no.160	60000600
	Kit 3 stainless steel shelves (SR5/01) + 4 stainless steel bottle-handling tubes (ST5/02) Bottles capacity: no.120	60000610
	Kit 3 stainless steel shelves (SR5/01) + 4 plexiglas flat bottle-handlings (SC5/03) Bottles capacity: no.124	60000620
	Kit 3 stainless steel shelves (SR5/01) + 4 inclined bottle-handlings (SI5/04) Bottles capacity: no.124	60000630
	Kit 2 stainless steel shelves (SR5/01) + 2 plexiglas flat bottle-handlings (SC5/03) + 2 inclined bottle-handlings (SI5/04) + 2 stainless steel bottle-handling tubes (ST5/02) Bottles capacity: no.104	60000640
	Stainless steel shelf for "standing" bottles (32 bottles' capacity)	60000700
	Stainless steel tubes for "horizontal" bottles (6 bottles' capacity)	60000705
	Plexiglas "horizontal" flat bottle-handling (7 bottles' capacity)	60000710
	Plexiglas shelf for "tilted" bottles (7 bottles' capacity)	60000715
	Glass sides for WL6/260 (overprice)	60000760
	Stainless steel 25x25 pipes structure WL6 H260 (glass sides)	60000748
	Stainless steel shelf for "standing" bottles (28 bottles' capacity) for glass sides structure	60000770
	Stainless steel shelf for "horizontal" bottles (22 bottles' capacity) for glass sides structure	60000780
	Stainless steel shelf for "tilted" bottles (12 bottles' capacity) for glass sides structure	60000790
	Color finishing WL6 1-2 doors (overprice)	60000850
	Condensing unit 1/4 HP for each WL compartment (> 10 meters distance)	40200180
	Condensing unit 1/6 HP for each WL compartment (≤ 10 meters distance)	40200184
	Wi-Fi supervising system (overprice)	45000565

INSTALLATION DIAGRAM:

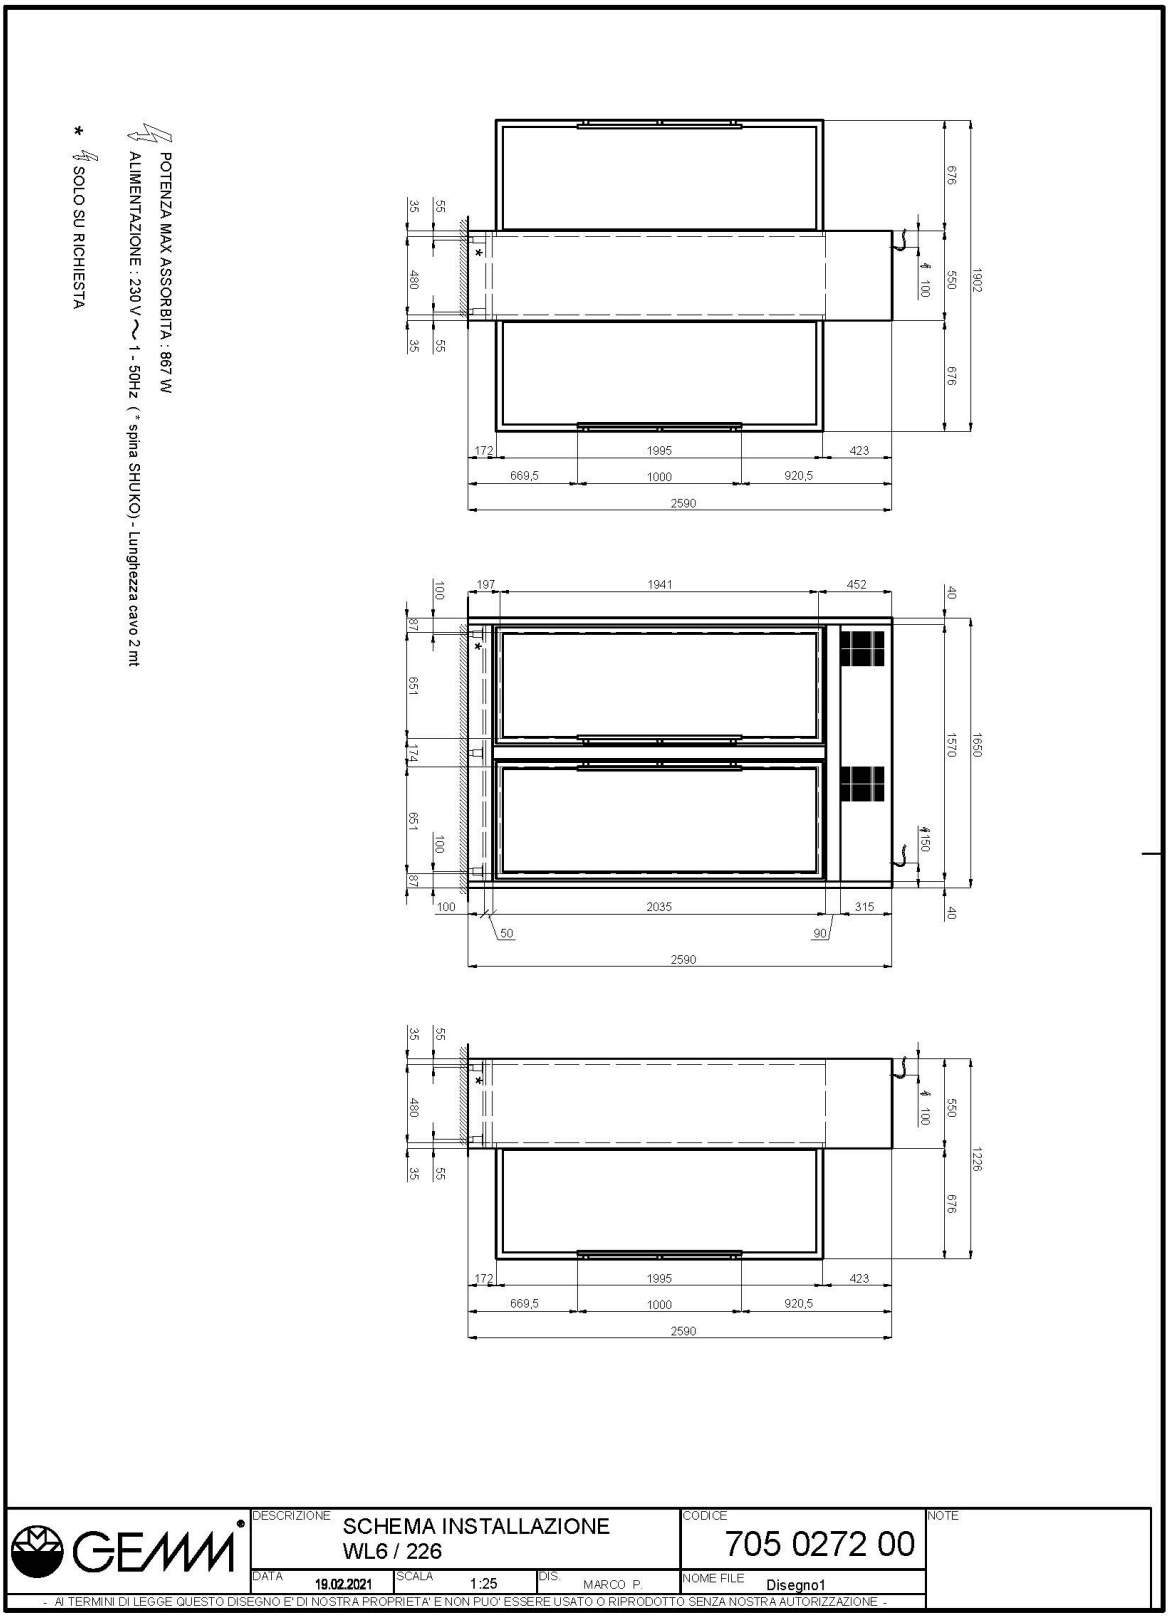

WL6/226S