PROFESSIONAL KITCHENS|WINE


WINE LIBRARY **Model: WL6/226P** **Code: 60000430**

WINE LIBRARY

REFRIGERATED WINE DISPLAY: 2 pass-through doors, with 2 independent temperatures, maximum capacity of 256 bottles.
Technology, design, and high performance to enhance any environment. Made of AISI 304 stainless steel, it allows for optimal preservation of all types of wine by setting the temperature independently in each compartment, +4/+16°C. With a customizable color finish, the full glass doors shine with internal white LED lighting (or warm light upon request).



- Construction: made in stainelss steel
- Internal capacity: 320 bottles
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.2" touch control panel, digital display
- "White/cold" led light (6000K); on request "Warm" led light (2700K)
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Machine supplied not assembled
- Optional equipment: painted color finishing on request
- Supply with: led lighting dimmer
- Not included: bottle-handlings



Technical Data:

Doors	nr	4
External dimensions (WxDxH)	cm	165 x 55 x 260
Insulation thickness	mm	50
Standard lock		YES
Standard light		SI, 6000K (on request 2700K)
Temperature	°C	+4/+16°C
Condensing unit		plug-in unit
Gas		R290
Noise level	dba	<43dba
Ventilation control		NO
Humidity control		NO
Max abs. power	W	860*
Cooling power	W	980*
Input voltage		1x230V ~ 50Hz
Climate class		4
Packaging dimensions (WxDxH)	cm	265 x 65 x 192 210 x 35 x 91 80 x 50 x 55 80 x 50 x 55
Volume (gross)	mc	4,41605
Net weight	kg	408
Gross weight	kg	473

*Ambient temp. +26°C / Evap. -10°C, cond. +45°C

DETAILS:



Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Led lighting dimmer with remote control




Stainless steel door handle



Internal white led light (on request warm led light)




2.2" touch control panel with digital display



Door lock with key



RAL color finish (on request)



Front anti-condensation heating element



Low-E double glazing (reduction of solar radiation and heat loss)



Glass sides (on request)



Glass sides (on request)



SR5/01 perforated stainless steel panel (max 32 bottles)



ST5/02 Stainless steel tube structure (max 6 bottles)



SC5/03 Flat bottle structure in plexiglas (max 7 bottles)




SI5/04 Inclined bottle shelf in plexiglas (max 7 bottles)

ACCESSORIES:

	K526/01	60000600
	K526/02	60000610
	K526/03	60000620
	K526/04	60000630
	K526/05	60000640
	SR5/01	60000700
	ST5/02	60000705
	SC5/03	60000710
	SI5/04	60000715
	Glass sides for WL6/260 (overprice)	60000760
	TFV26/01	60000748
	SR5/01FV	60000770
	SO5/02FV	60000780
	SI5/03FV	60000790
	Color finishing WL6 1-2 doors (overprice)	60000850
	Condensing unit 1/4 HP for each WL compartment (> 10 meters distance)	40200180
	Condensing unit 1/6 HP for each WL compartment (≤ 10 meters distance)	40200184
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

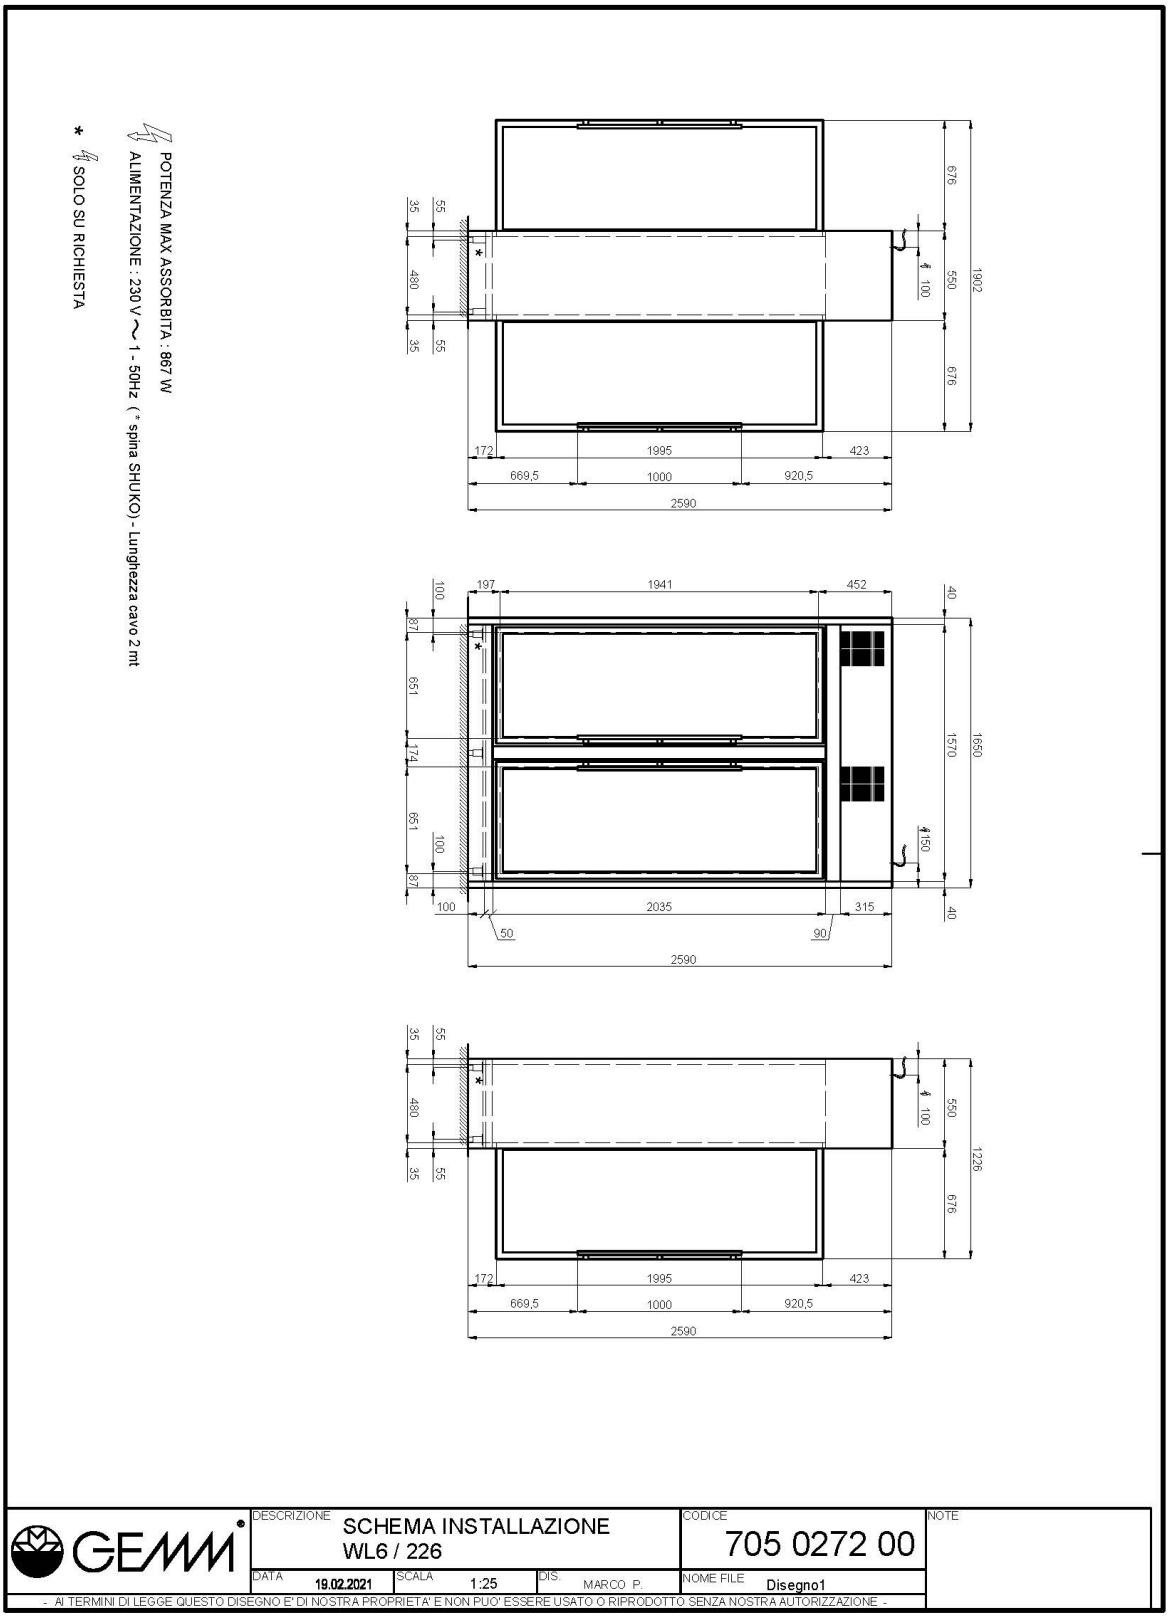

WL6/226P