PROFESSIONAL KITCHENS|WINE


WINE LIBRARY **Model: WL6/326S** **Code: 60000440**

WINE LIBRARY

REFRIGERATED WINE DISPLAY: 3-door wall version with 3 independent temperatures, maximum bottle capacity of 384. Technology, design, and high performance to enhance any environment. Made of AISI 304 stainless steel, it allows for optimal preservation of all types of wine by setting the temperature independently in each compartment, +4/+16°C. With a customizable color finish, the full glass doors shine with internal white LED lighting (or warm light upon request).



- Construction: made in stainelss steel
- Internal capacity: 480 bottles
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.2" touch control panel, digital display
- "White/cold" led light (6000K); on request "Warm" led light (2700K)
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Machine supplied not assembled
- Optional equipment: painted color finishing on request
- Supply with: led lighting dimmer
- Not included: bottle-handlings



Technical Data:

Doors	nr	3
External dimensions (WxDxH)	cm	247,5 x 55 x 260
Insulation thickness	mm	50
Standard lock		YES
Standard light		SI, 6000K (on request 2700K)
Temperature	°C	+4/+16°C
Condensing unit		plug-in unit
Gas		R290
Noise level	dba	<43dba
Ventilation control		NO
Humidity control		NO
Max abs. power	W	1290*
Cooling power	W	1470*
Input voltage		1x230V ~ 50Hz
Climate class		4
Packaging dimensions (WxDxH)	cm	265 x 65 x 192 265 x 65 x 120 210 x 35 x 91 80 x 50 x 55 80 x 50 x 55 80 x 50 x 55
Volume (gross)	mc	6,70305
Net weight	kg	657
Gross weight	kg	722

*Ambient temp. +26°C / Evap. -10°C, cond. +45°C

DETAILS:



Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Led lighting dimmer with remote control




Stainless steel door handle



Internal white led light (on request warm led light)




2.2" touch control panel with digital display



Door lock with key



RAL color finish (on request)



Front anti-condensation heating element



Low-E double glazing (reduction of solar radiation and heat loss)



Glass sides (on request)



Glass sides (on request)



SR5/01 perforated stainless steel panel (max 32 bottles)



ST5/02 Stainless steel tube structure (max 6 bottles)



SC5/03 Flat bottle structure in plexiglas (max 7 bottles)




SI5/04 Inclined bottle shelf in plexiglas (max 7 bottles)

ACCESSORIES:

	Kit 5 stainless steel shelves (SR5/01) Bottles capacity: no.160	60000600
	Kit 3 stainless steel shelves (SR5/01) + 4 stainless steel bottle-handling tubes (ST5/02) Bottles capacity: no.120	60000610
	Kit 3 stainless steel shelves (SR5/01) + 4 plexiglas flat bottle-handlings (SC5/03) Bottles capacity: no.124	60000620
	Kit 3 stainless steel shelves (SR5/01) + 4 inclined bottle-handlings (SI5/04) Bottles capacity: no.124	60000630
	Kit 2 stainless steel shelves (SR5/01) + 2 plexiglas flat bottle-handlings (SC5/03) + 2 inclined bottle-handlings (SI5/04) + 2 stainless steel bottle-handling tubes (ST5/02) Bottles capacity: no.104	60000640
	Kit 2 stainless steel shelves (SR5/01) + 2 plexiglas flat bottle-handlings (SC5/03) + 2 inclined bottle-handlings (SI5/04) + 2 stainless steel bottle-handling tubes (ST5/02) Bottles capacity: no.104	60000700
	Stainless steel horizontal bottle-handlings tubes (no. 6 bottles capacity)	60000705
	Plexiglas horizontal flat bottle-handling (no. 7 bottles capacity)	60000710
	Plexiglas shelf for inclined bottles (no. 7 bottles capacity)	60000715
	Glass sides for WL6/260 (overprice)	60000760
	Stainless steel 25x25 pipes structure WL6 H260 (glass sides)	60000748
	Stainless steel shelf for "standing" bottles (28 bottles' capacity) for glass sides structure	60000770
	Stainless steel shelf for "horizontal" bottles (22 bottles' capacity) for glass sides structure	60000780
	Stainless steel shelf for "tilted" bottles (12 bottles' capacity) for glass sides structure	60000790
	Color finishing WL6 3-4 doors (overprice)	60000860
	Condensing unit 1/4 HP for each WL compartment (> 10 meters distance)	40200180
	Condensing unit 1/6 HP for each WL compartment (≤ 10 meters distance)	40200184
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

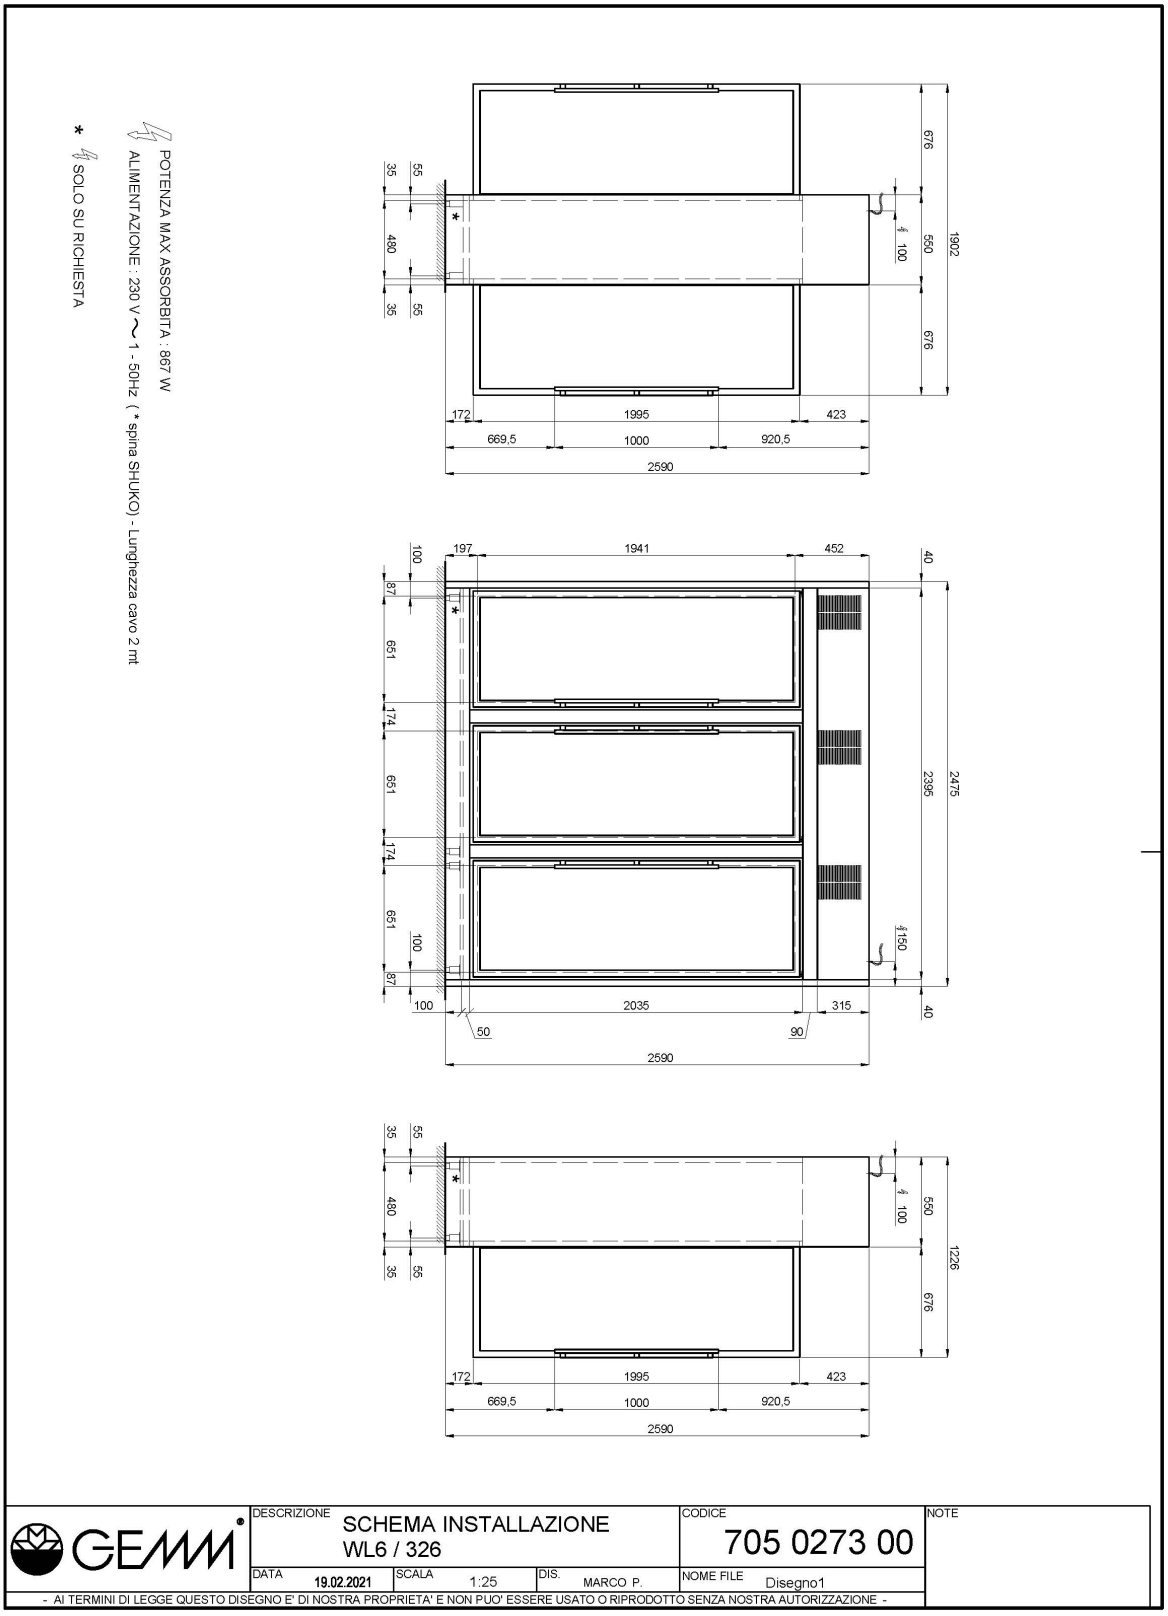

WL6/326S