# PROFESSIONAL KITCHENS|WINE

**WINE LIBRARY** **Model: WL6/426P** **Code: 60000470**

*WINE LIBRARY*



REFRIGERATED WINE DISPLAY: 4 pass-through doors, with 4 independent temperatures, maximum capacity of 512 bottles.
Technology, design, and high performance to enhance any environment. Made of AISI 304 stainless steel, it allows for optimal preservation of all types of wine by setting the temperature independently in each compartment, +4/+16°C. With a customizable color finish, the full glass doors shine with internal white LED lighting (or warm light upon request).

- Construction: made in stainelss steel
- Internal capacity: 640 bottles
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.2" touch control panel, digital display
- "White/cold" led light (6000K); on request "Warm" led light (2700K)
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Machine supplied not assembled
- Optional equipment: painted color finishing on request
- Supply with: led lighting dimmer
- Not included: bottle-handlings



Technical Data:

| | | |
|---|---|---|
| Doors | nr | 8 |
| External dimensions (WxDxH) | cm | 330 x 55 x 260 |
| Insulation thickness | mm | 50 |
| Standard lock | | YES |
| Standard light | | SI, 6000K (on request 2700K) |
| Temperature | °C | +4/+16°C |
| Condensing unit | | plug-in unit |
| Gas | | R290 |
| Noise level | dba | <43dba |
| Ventilation control | | NO |
| Humidity control | | NO |
| Max abs. power | W | 1720* |
| Cooling power | W | 1960* |
| Input voltage | | 1x230V ~ 50Hz |
| Climate class | | 4 |
| Packaging dimensions (WxDxH) | cm | 265 x 65 x 192<br>265 x 65 x 192<br>210 x 35 x 91<br>210 x 35 x 91<br>80 x 50 x 55<br>80 x 50 x 55<br>80 x 50 x 55<br>80 x 50 x 55 |
| Volume (gross) | mc | 8,8321 |
| Net weight | kg | 871 |
| Gross weight | kg | 946 |

*Ambient temp. +26°C / Evap. -10°C, cond. +45°C

DETAILS:




Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Led lighting dimmer with remote control



Stainless steel door handle



Internal white led light (on request warm led light)



2.2" touch control panel with digital display



Door lock with key



RAL color finish (on request)



Front anti-condensation heating element



Low-E double glazing (reduction of solar radiation and heat loss)



Glass sides (on request)



Glass sides (on request)



SR5/01 perforated stainless steel panel (max 32 bottles)



ST5/02 Stainless steel tube structure (max 6 bottles)



SC5/03 Flat bottle structure in plexiglas (max 7 bottles)



SI5/04 Inclined bottle shelf in plexiglas (max 7 bottles)

ACCESSORIES:

| | | |
|---|---|---|
|  | K526/01 | 60000600 |
|  | K526/02 | 60000610 |
|  | K526/03 | 60000620 |
|  | K526/04 | 60000630 |
|  | K526/05 | 60000640 |
|  | SR5/01 | 60000700 |
|  | ST5/02 | 60000705 |
|  | SC5/03 | 60000710 |
|  | SI5/04 | 60000715 |
|  | Glass sides for WL6/260 (overprice) | 60000760 |
|  | TFV26/01 | 60000748 |
|  | SR5/01FV | 60000770 |
|  | SO5/02FV | 60000780 |
|  | SI5/03FV | 60000790 |
|  | Color finishing WL6 3-4 doors (overprice) | 60000860 |
|  | Condensing unit 1/4 HP for each WL compartment (> 10 meters distance) | 40200180 |
|  | Condensing unit 1/6 HP for each WL compartment (≤ 10 meters distance) | 40200184 |
|  | Wi-Fi supervising system (overprice) | 45000565 |
|  | 60Hz frequency | 40200560 |

INSTALLATION DIAGRAM:

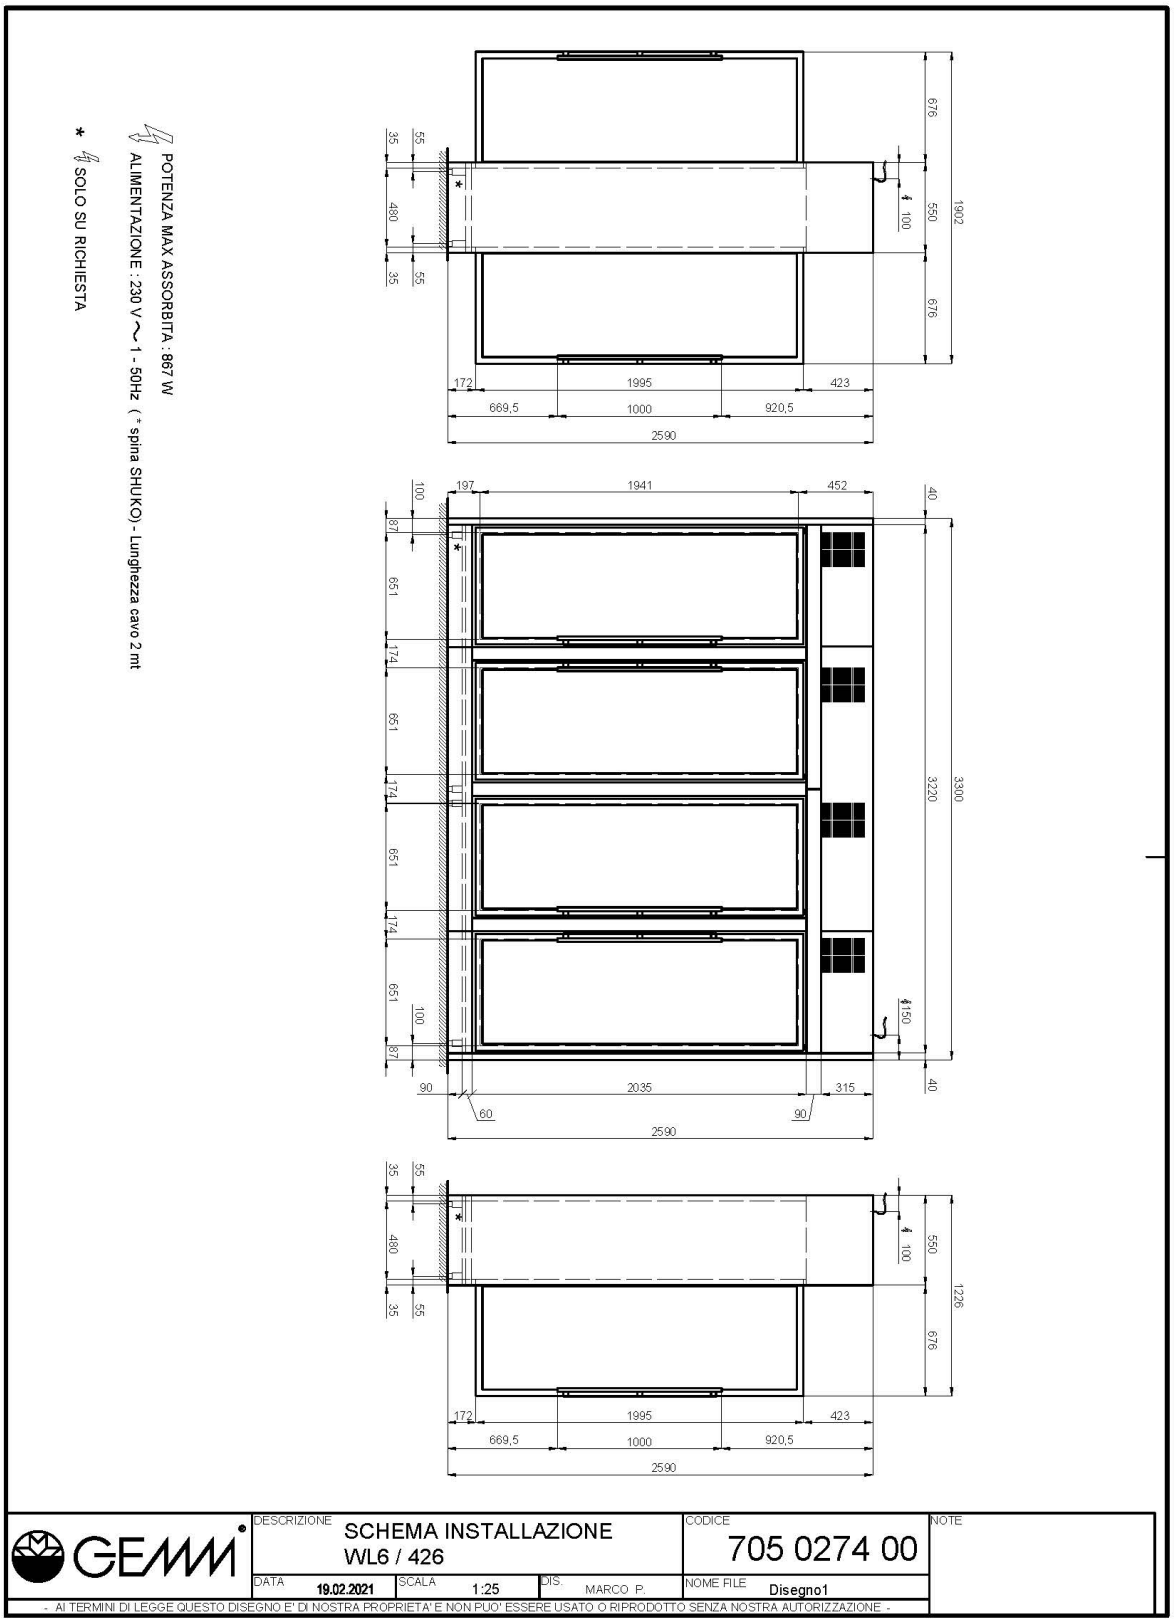


WL6/426P