PROFESSIONAL KITCHENS

DAIRY **Model: SF5/121** **Code: 60002080**

DAIRY

REFRIGERATED DISPLAY FOR COLD CUTS AND CHEESES: with compact dimensions, refined design, and great reliability, it is perfect for any type of establishment. Capable of preserving the qualities of aged products, it features a single-shell construction in stainless steel with a built-in concealed motor and LED internal lighting, maintaining a temperature of +2/+10°C.



- Construction: made in stainelss steel
- Internal capacity: 80 kg ~
- Position of technical compartment: retractable, on the bottom
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- "Warm" led light (2700K)
- Defrosting system: automatic by pause
- Evaporation of condensation water: automatic
- Optional equipment: painted color finishing on request
- Not included: internal fittings



Technical Data:

Doors	nr	1
External dimensions (WxDxH)	cm	81 x 50 x 210
Insulation thickness	mm	50
Standard lock		YES
Standard light		YES
Temperature	°C	+2/+10°C
Condensing unit		plug-in unit
Gas		R290
Noise level	dba	<43dba
Ventilation control		NO
Humidity control		NO
Max abs. power	W	515*
Cooling power	W	305*
Input voltage		1x230V ~ 50Hz
Climate class		4
Packaging dimensions (WxDxH)	cm	59 x 92 x 226
Volume (gross)	mc	1,23
Net weight	kg	150
Gross weight	kg	170

*Ambient temp. +26°C / Evap. -10°C, cond. +45°C

DETAILS:



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Perforated stainless steel shelf



Stainless steel hanging rods for charcuterie

ACCESSORIES:

	Stainless steel shelf for DA5/ SF5/	60002100
	Stainless steel hanging rods for meat/charcuterie with no. 2 s/s tubes and no. 3 s/s hooks for DA5/ SF5/	60002110
	Stainless steel finishing top cm 81x50x2h	60001150
	Stainless/steel hook for meat/charcuterie	60002120
	Set of retractable castors WD DA SF	60002180
	Dimmer regolazione luci WD DA SF	60002190
	Color finishing WD DA SF (overprice)	60002200
	Condensing unit 1/4 HP for WD DA SF (distanza ≤ 10 metri)	40200180
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

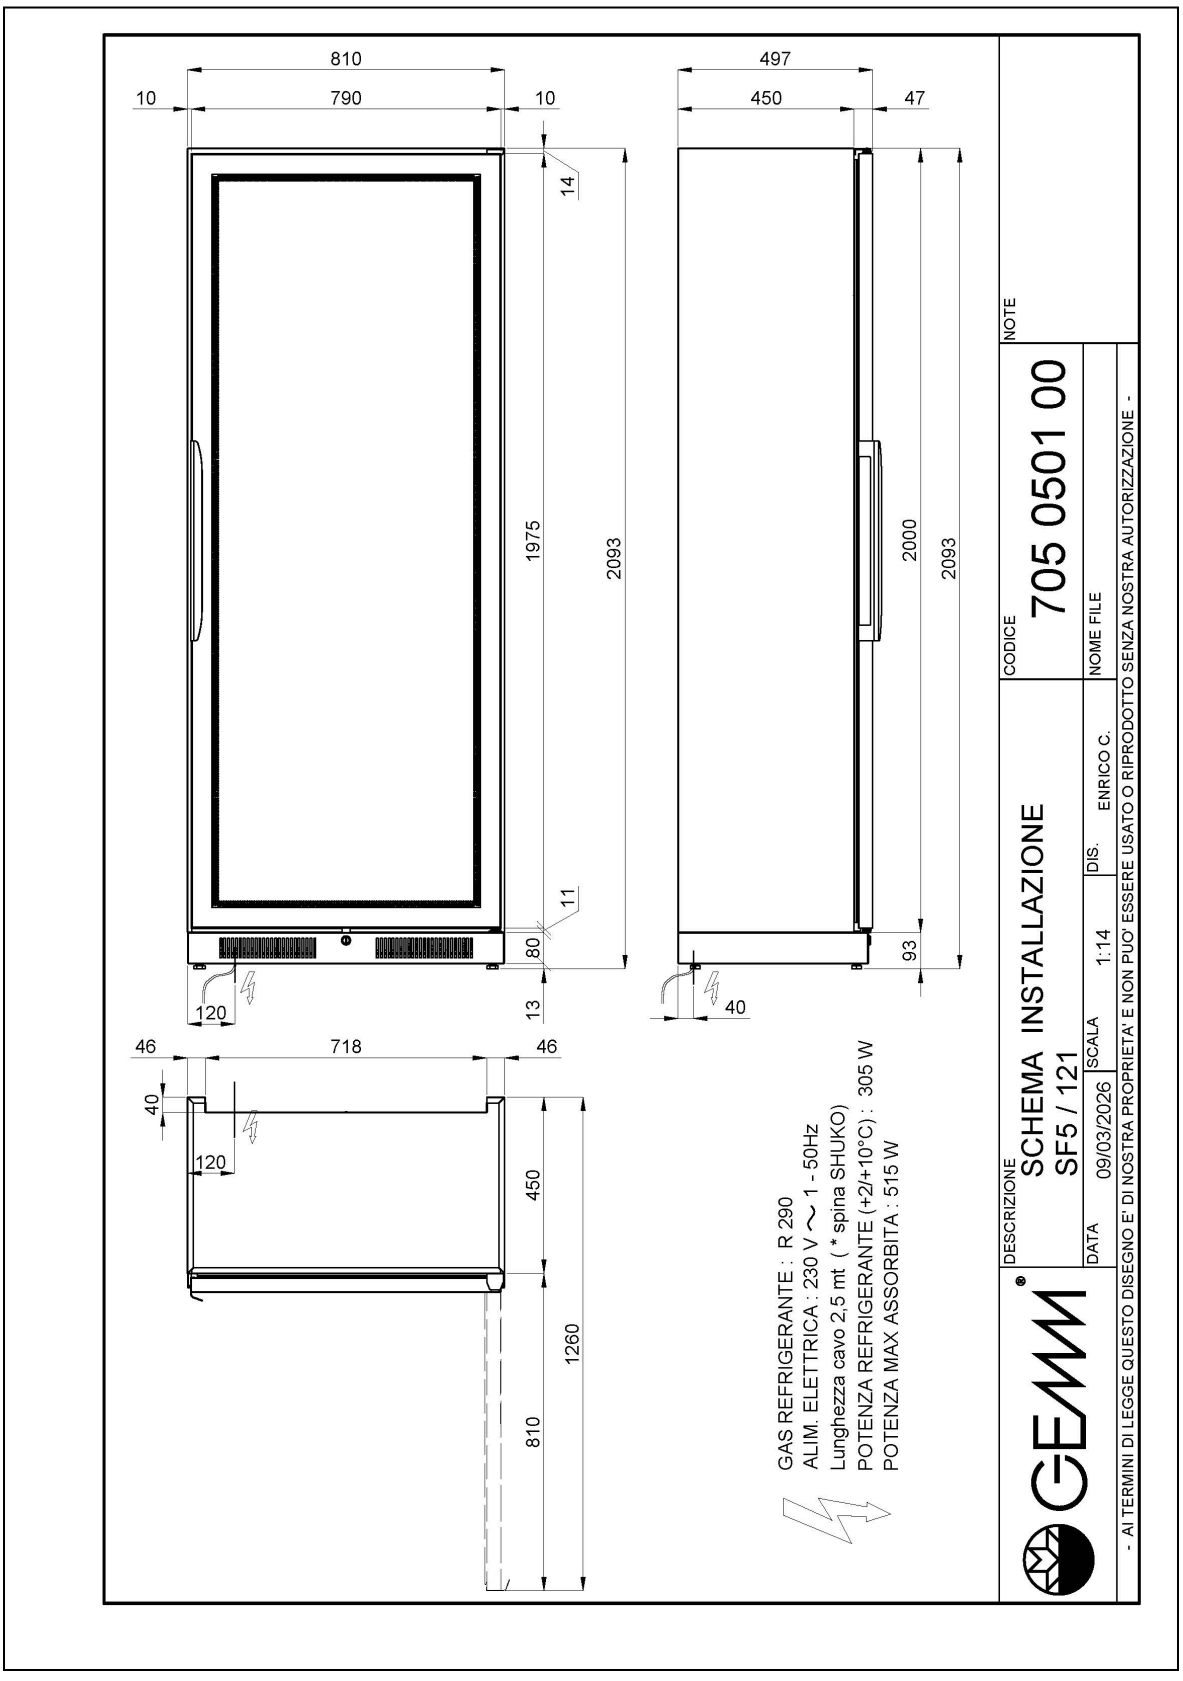

SF5/121

INSTALLATION DIAGRAM:

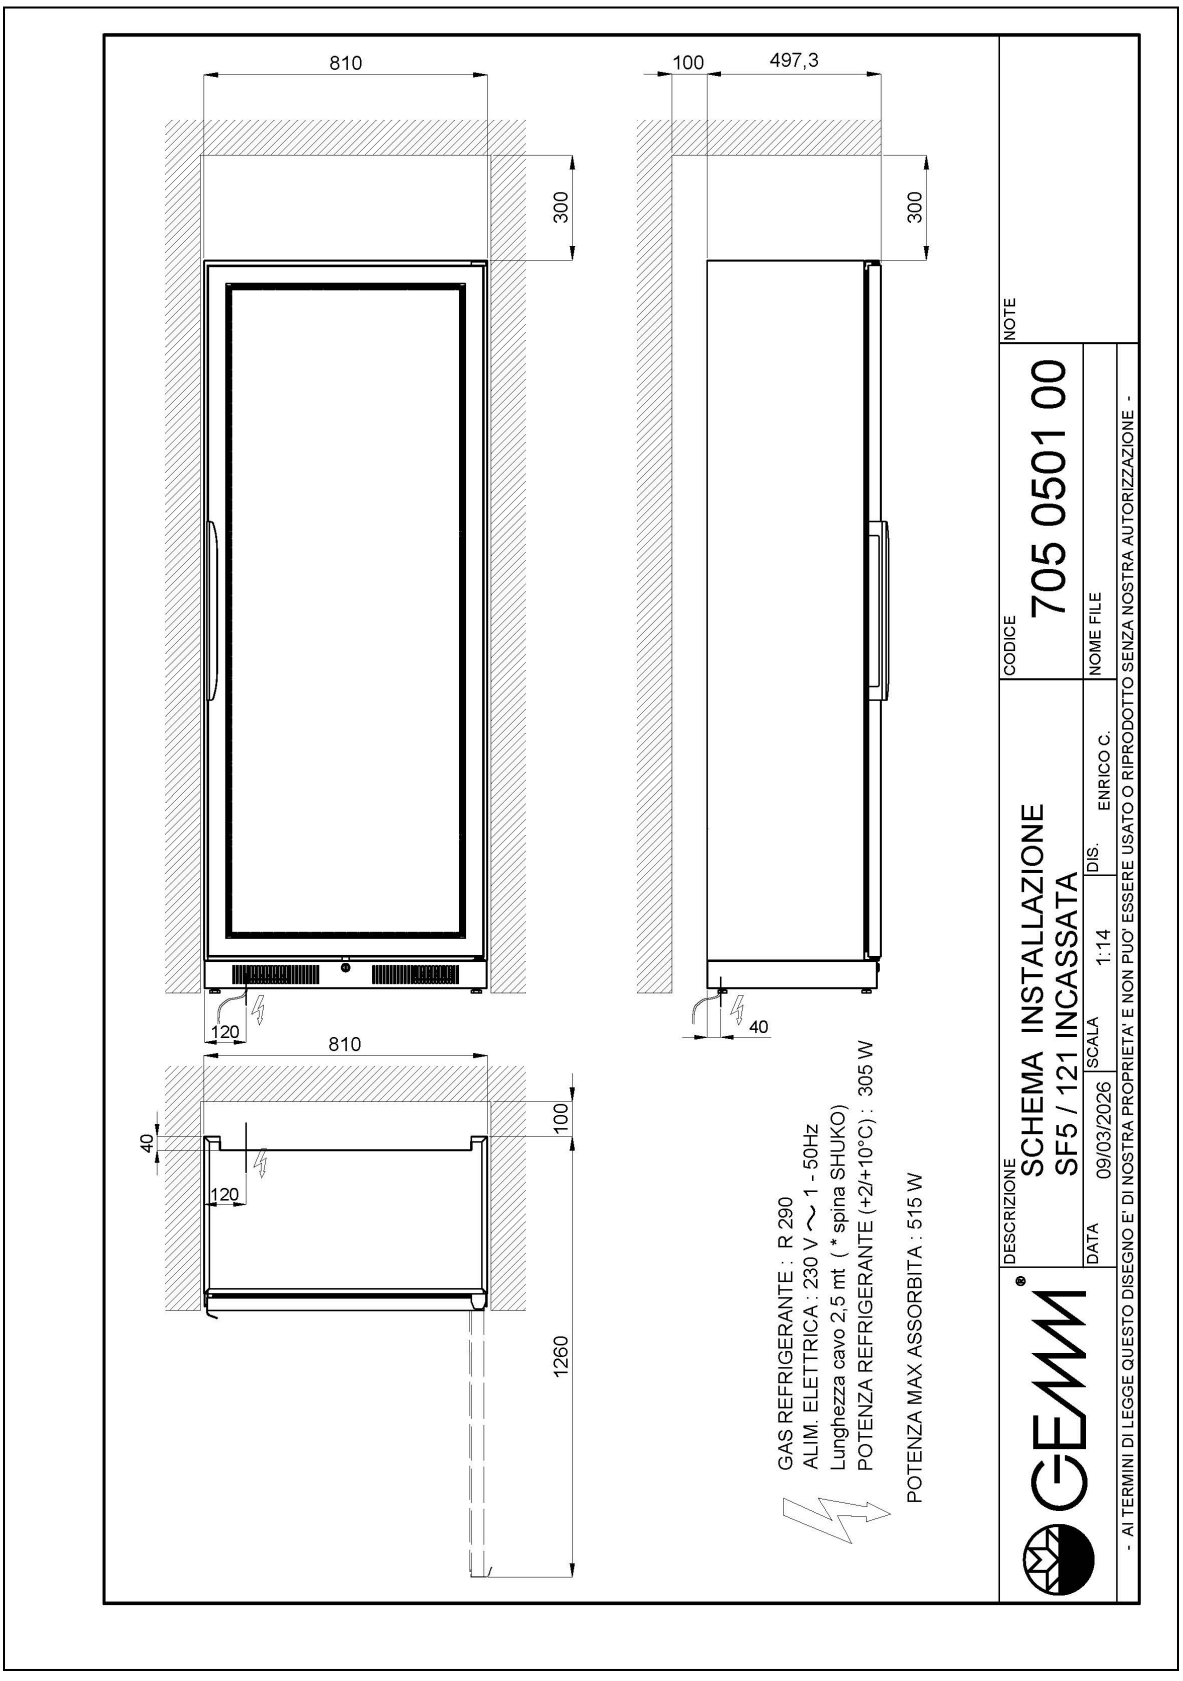

SF5/121