

PROFESSIONAL KITCHENS

REFRIGERATED WALL UNIT

Model: PR5/120


Code: 40101000

NEW ATLAS

REFRIGERATED WALL UNIT- Refrigerated wall unit 2 doors with built-in compressor. Also available with glass doors and/or with valve system for remote compressor installation.

- Construction: made in stainless steel
 - Position of technical compartment: on right side
 - Refrigeration type: ventilated cooling system
 - Control board panel: 2.2" touch control panel, digital display
 - prearranged to be installed on plinth
 - Defrosting system: with heating elements
 - Evaporation of condensation water: automatic condensate evaporation
 - Optional equipment: prearranged for remote system (R134a gas valve)
 - Supply with: 2 340x360mm s/s perforated shelves for each door
- accessories for wall fixing





Technical Data:

| | | |
|------------------------------|----|-----------------|
| Body Height | mm | 665 |
| Doors | nr | 2 |
| Capacity (gross) | l | 275 |
| External dimensions (WxDxH) | cm | 120 x 49 x 66,5 |
| Insulation thickness | mm | 50 |
| Evaporators | nr | 2 |
| Standard lock | | NO |
| Standard light | | YES |
| Temperature | °C | +2/+8°C |
| Condensing unit | | plug-in unit |
| Gas | | R290 |
| Ventilation control | | NO |
| Humidity control | | NO |
| Max abs. power | W | 160* |
| Cooling power | W | 360* |
| Input voltage | | 1x230V ~ 50Hz |
| Climate class | | 5 |
| Packaging dimensions (WxDxH) | cm | 76 x 135 x 112 |
| Volume (gross) | mc | 1,15 |
| Gross weight | kg | 98 |

*Evap. -10°C, Cond +45°C

DETAILS:



Insulation thickness 50mm and easily removable gaskets.



Perforated internal shelves 35.7x34 cm.



Digital control with temperature +2/+10 °C.



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Insulation thickness 50mm and easily removable gaskets.



Perforated internal shelves 35.7x34 cm.



Digital control with temperature +2/+10 °C.



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:



Glass door for refrigerated wall unit (overprice for each door)

40101700



Stainless steel shelf for PR5/120

40101710



Arrangement for remote condensing unit (valve system gas R134a)

20801270



Wi-Fi supervising system (overprice)


45000565



60Hz frequency

40200560

INSTALLATION DIAGRAM:

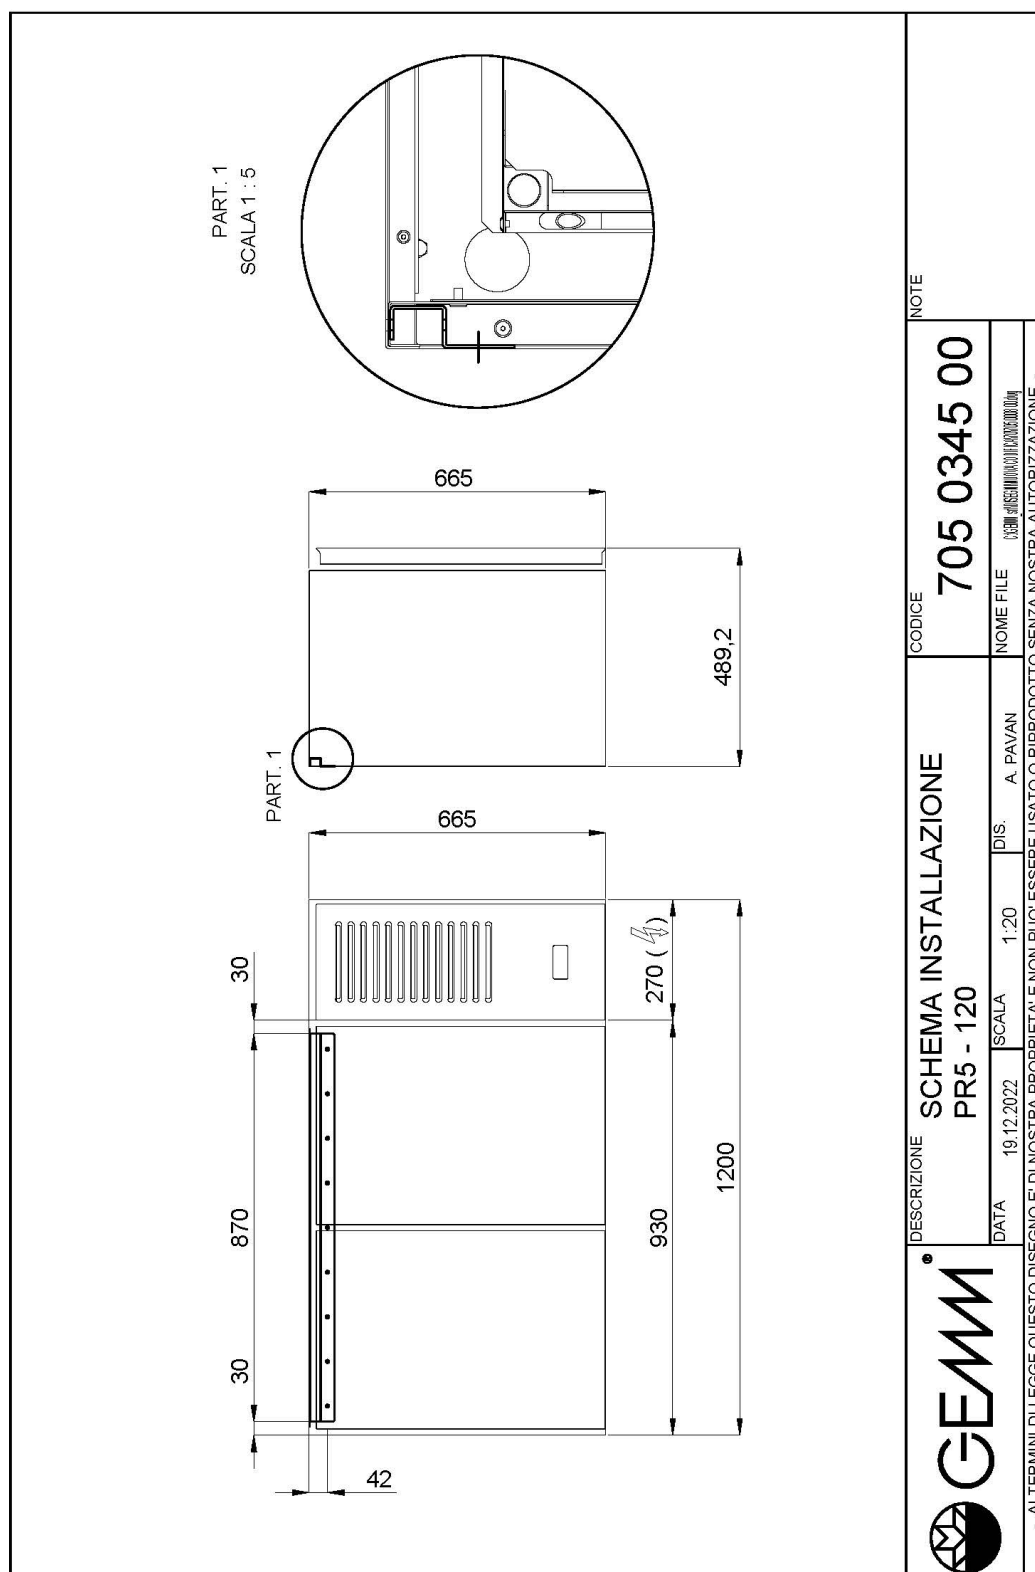

PR5/120