

## PROFESSIONAL KITCHENS

**REFRIGERATED WALL UNIT**

**Model: PR5/120**


**Code: 40101000**

*NEW ATLAS*

REFRIGERATED WALL UNIT- Refrigerated wall unit 2 doors with built-in compressor. Also available with glass doors and/or with valve system for remote compressor installation.

- Construction: made in stainless steel
  - Position of technical compartment: on right side
  - Refrigeration type: ventilated cooling system
  - Control board panel: 2.2" touch control panel, digital display
  - prearranged to be installed on plinth
  - Defrosting system: with heating elements
  - Evaporation of condensation water: automatic condensate evaporation
  - Optional equipment: prearranged for remote system (R134a gas valve)
  - Supply with: 2 340x360mm s/s perforated shelves for each door
- accessories for wall fixing





Technical Data:

Body Height	mm	665
Doors	nr	2
Capacity (gross)	l	275
External dimensions (WxDxH)	cm	120 x 49 x 66,5
Insulation thickness	mm	50
Evaporators	nr	2
Standard lock		NO
Standard light		YES
Temperature	°C	+2/+8°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	160*
Cooling power	W	360*
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	76 x 135 x 112
Volume (gross)	mc	1,15
Gross weight	kg	98

\*Evap. -10°C, Cond +45°C

DETAILS:



Insulation thickness 50mm and easily removable gaskets.



Perforated internal shelves 35.7x34 cm.



Digital control with temperature +2/+10 °C.



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Insulation thickness 50mm and easily removable gaskets.



Perforated internal shelves 35.7x34 cm.



Digital control with temperature +2/+10 °C.








Ecological gas (R290)




Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:

	Glass door for refrigerated wall unit (overprice for each door)	40101700
	Stainless steel shelf for PR5/120	40101710
	Arrangement for remote condensing unit (valve system gas R134a)	20801270
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

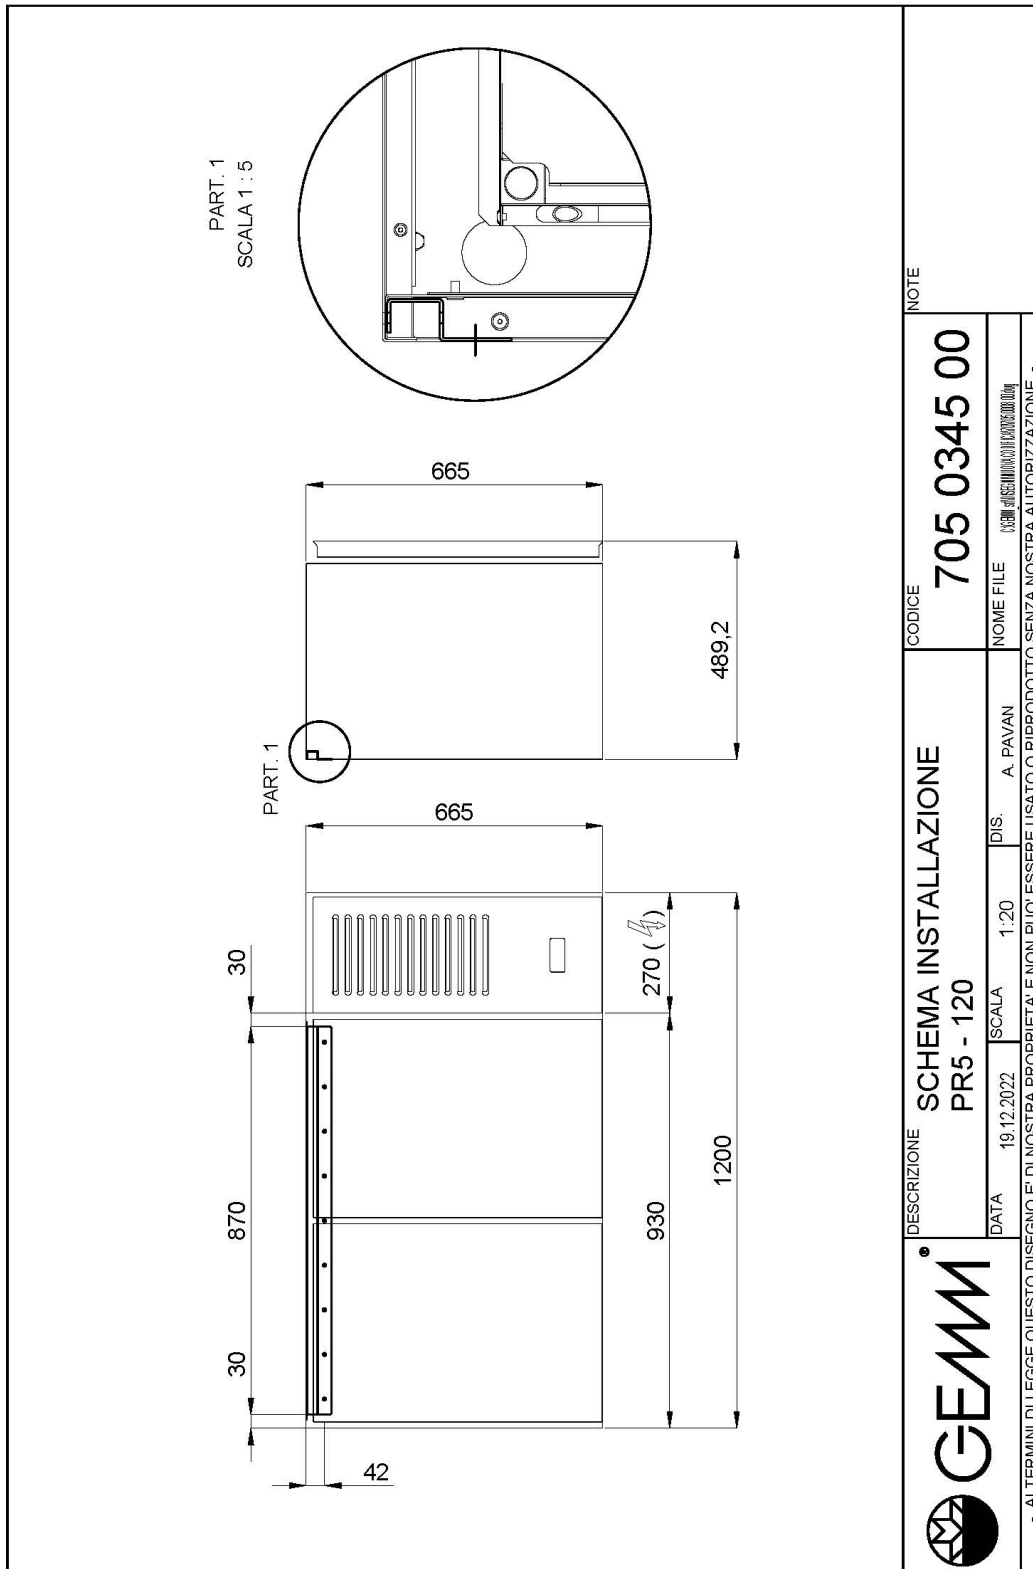

	DESCRIZIONE	SCHEMA INSTALLAZIONE		NOTE
		PR5 - 120		
	DATA	19.12.2022	SCALA	1:20
			DIS.	A. PAVAN
- AI TERMINI DI LEGGE QUESTO DISEGNO È DI NOSTRA PROPRIETÀ E NON PUÒ ESSERE USATO O RIPRODOTTO SENZA NOSTRA AUTORIZZAZIONE -				

PR5/120