# PROFESSIONAL KITCHENS

**GN COUNTERS H 760** **Model: THND/100S** **Code: 40331035**

*ATLAS PLUS*

GN 1/1 PREARRANGED REFRIGERATED COUNTER BODY h 760 - Refrigerated counter 700 depth, available also with left technical department.

- Construction: made in stainelss steel
- supplied with thermostatic valve (R134a)
- Internal capacity: GN 1/1 racks
- Position of technical compartment: on right side
- Refrigeration type: ventilated cooling system
- Control board panel: 2.8" touch control panel, digital display
- prearranged to be installed on plinth
- Defrosting system: with heating elements
- Evaporation of condensation water: manual tray
- Optional equipment: drawer units
- Supply with: 2 GN 1/1 shelves each door
- Not included: condensing unit



Technical Data:

| | | |
|---|---|---|
| Body Height | mm | 760 |
| Doors | nr | 2 |
| Capacity (net) | l | 213 |
| Capacity (gross) | l | 311 |
| External dimensions (WxDxH) | cm | 107 x 69 x 86 |
| Insulation thickness | mm | 50 |
| Tray pitch | mm | 75 |
| Rack positions | nr | 8 |
| Top type | | without work top |
| Evaporators | nr | 1 |
| Standard lock | | NO |
| Standard light | | NO |
| Temperature | °C | -2/+8°C |
| Condensing unit | | remote condensing unit |
| Ventilation control | | NO |
| Humidity control | | NO |
| Max abs. power | W | 220* |
| Cooling power | W | 406* |
| Input voltage | | 1x230V ~ 50Hz |
| Climate class | | 5 |
| Volume (gross) | mc | 1,15 |
| Gross weight | kg | 72 |

*Evap. -10°C, Cond +45°C

DETAILS:

Drawer unit detail.



Air circulation

Stainless steel construction with 50mm insulation thickness.

Internal detail.

Color finish (RAL) upon request

Digital touch thermostat

S/S back finish

Ecological gas (R290)

GEMM Cloud

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:

| | | |
|---|---|---|
| | CRH/2 Refrigerated drawer unit with 2 1/2 drawers (overprice) | 40331200 |
| | CRH/3 Refrigerated drawer unit with 3 1/3 drawers (overprice) | 40331205 |
| | CRH/4 Refrigerated drawer unit with 2 1/3+2/3 drawers (overprice) | 40331210 |
| | PVH/01 Glass door for refrigerated counters H760 with led light included (overprice) | 40331250 |
|  | SPH/01 Self-locking key for counters door | 40331255 |
| | Condensing unit 1/4 HP for 1-2 doors positive counter (≤ 10 meters distance) | 40200180 |
| | Tray for automatic elimination of condensate water | 40200185 |
| | Pair of runners for GN 1/1 shelf | 40200506 |
| | GN 1/1 shelf | 40200500 |
| | Stainless steel GN 1/1 shelf | 45100240 |
| | Stainless steel GN 1/1 tray h 40 mm | 40105050 |
| | Stainless steel GN 1/1 tray h 65 mm | 40105060 |
| | Stainless steel GN 1/1 tray h 100 mm | 40105070 |
|  | Stainless steel lid for GN 1/1 tray | 40105080 |
| | Set of no. 4 Ø 125 castors | 40200530 |
|  | LED light for 2 doors (counter), overprice | 40203010 |
| | Wi-Fi supervising system (overprice) | 45000565 |
|  | 60Hz frequency | 40200560 |

INSTALLATION DIAGRAM:

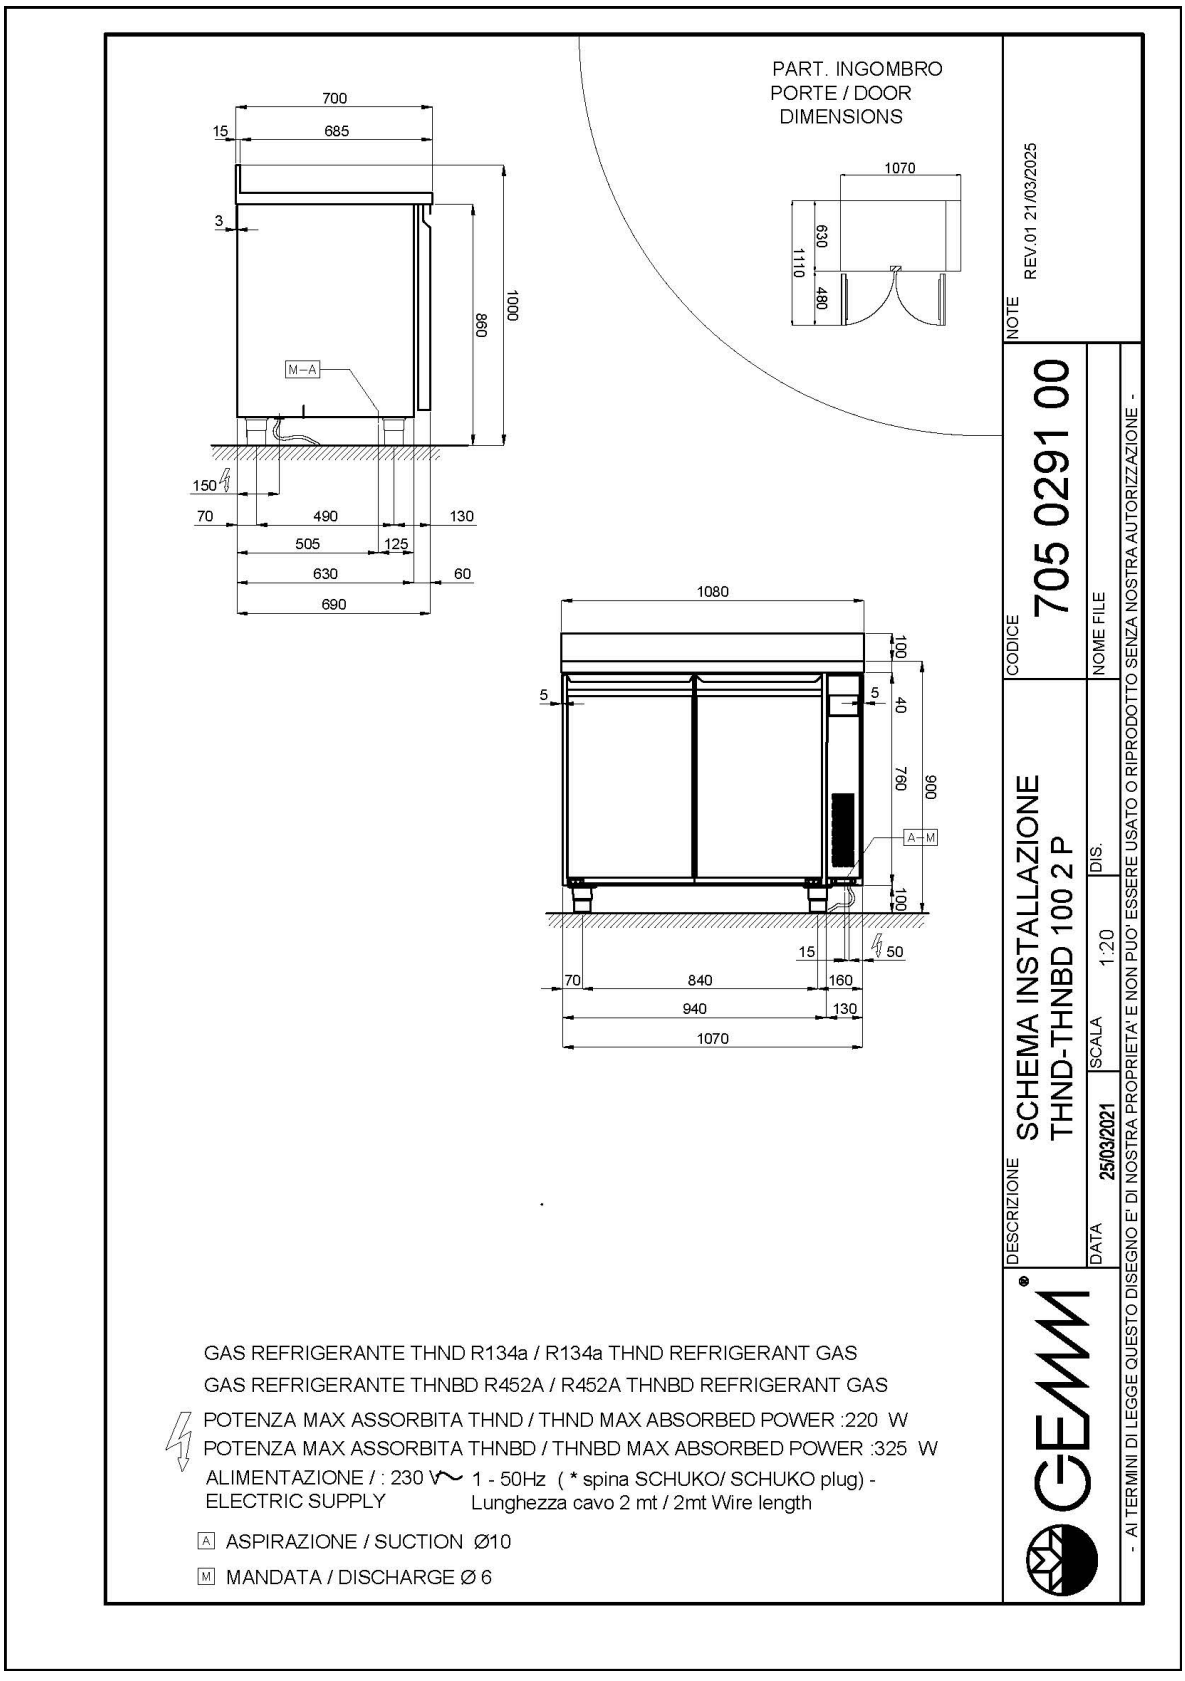


THND/100S