PASTRY


600x400 COUNTERS **Model: TAPBT/10A** **Code: 42040002**

LABOR

EN FREEZER COUNTER - Freezer pastry counter suitable for 600x400 trays.

- Construction: made in stainelss steel
- Internal capacity: 600x400 mm racks
- Position of technical compartment: on right side
- Refrigeration type: refrigeration system HSS "Helped Static System"
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Supply with: 7 pair of runners





Technical Data:

Body Height	mm	710
Doors	nr	1
Capacity (net)	l	135
Capacity (gross)	l	195
Capacity of trays/shelves	mm	7 600x400
External dimensions (WxDxH)	cm	105 x 80 x 100
Insulation thickness	mm	50
Tray pitch	mm	37,5
Rack positions	nr	13
Stainless steel top thickness	mm	15/10 H 40
Top type		AISI 304 with backsplash
Evaporators	nr	1
Standard lock		NO
Standard light		NO
Temperature	°C	-15/-20°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		NO
Humidity control		NO
Max abs. power	W	455*
Cooling power	W	485**
Input voltage		1x230V ~ 50Hz
Energy efficiency class		D
Energy consumption kWh/24h	kWh/24h	5,8
Energy consumption kWh/year	kWh/year	2127
Energy efficiency index		67,1
Climate class		5
Packaging dimensions (WxDxH)	cm	170 x 96 x 110
Volume (gross)	mc	1,8
Net weight	kg	85
Gross weight	kg	100

*Evap. -10°C, Cond. +45°C / **Evap. -23,3 Cond. +54,4°C

DETAILS:



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Body H710 mm



Stainless steel h 40 mm worktops reinforced and made with 15/10 sheet metal




Stainless steel construction with 50mm insulation thickness



Digital touch thermostat



40x60 cm trays



Racks with easily removable guides featuring 13 positions (37,5 mm pitch)



Internal cell probe for constant temperature monitoring



Evaporators with cataphoresis treatment and electronic fans



Stainless steel back finish



Adjustable stainless steel feet



RAL color finish (on request)



Ecological gas (R290)



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)



Body H710 mm



Stainless steel h 40 mm worktops reinforced and made with 15/10 sheet metal




Stainless steel construction with 50mm insulation thickness



Digital touch thermostat



40x60 cm trays



Racks with easily removable guides featuring 13 positions (37,5 mm pitch)



Internal cell probe for constant temperature monitoring



Evaporators with cataphoresis treatment and electronic fans



Stainless steel back finish



Adjustable stainless steel feet




RAL color finish (on request)

ACCESSORIES:


	Rilsan cm 60x40 shelf	45020550
	Pair of runners for 60x40 cm trays	20808031
	Stainless steel cm 40x60x2h tray	42000560
	Stainless steel cm 40x60x3h tray	42000562
	Set of no. 4 Ø 125 castors	40200530
	LED light for 1 door (counter), overprice	40203005
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560
	Rilsan cm 60x40 shelf	45020550
	Pair of runners for 60x40 cm trays	20808031
	Stainless steel cm 40x60x2h tray	42000560
	Stainless steel cm 40x60x3h tray	42000562
	Set of no. 4 Ø 125 castors	40200530
	LED light for 1 door (counter), overprice	40203005
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

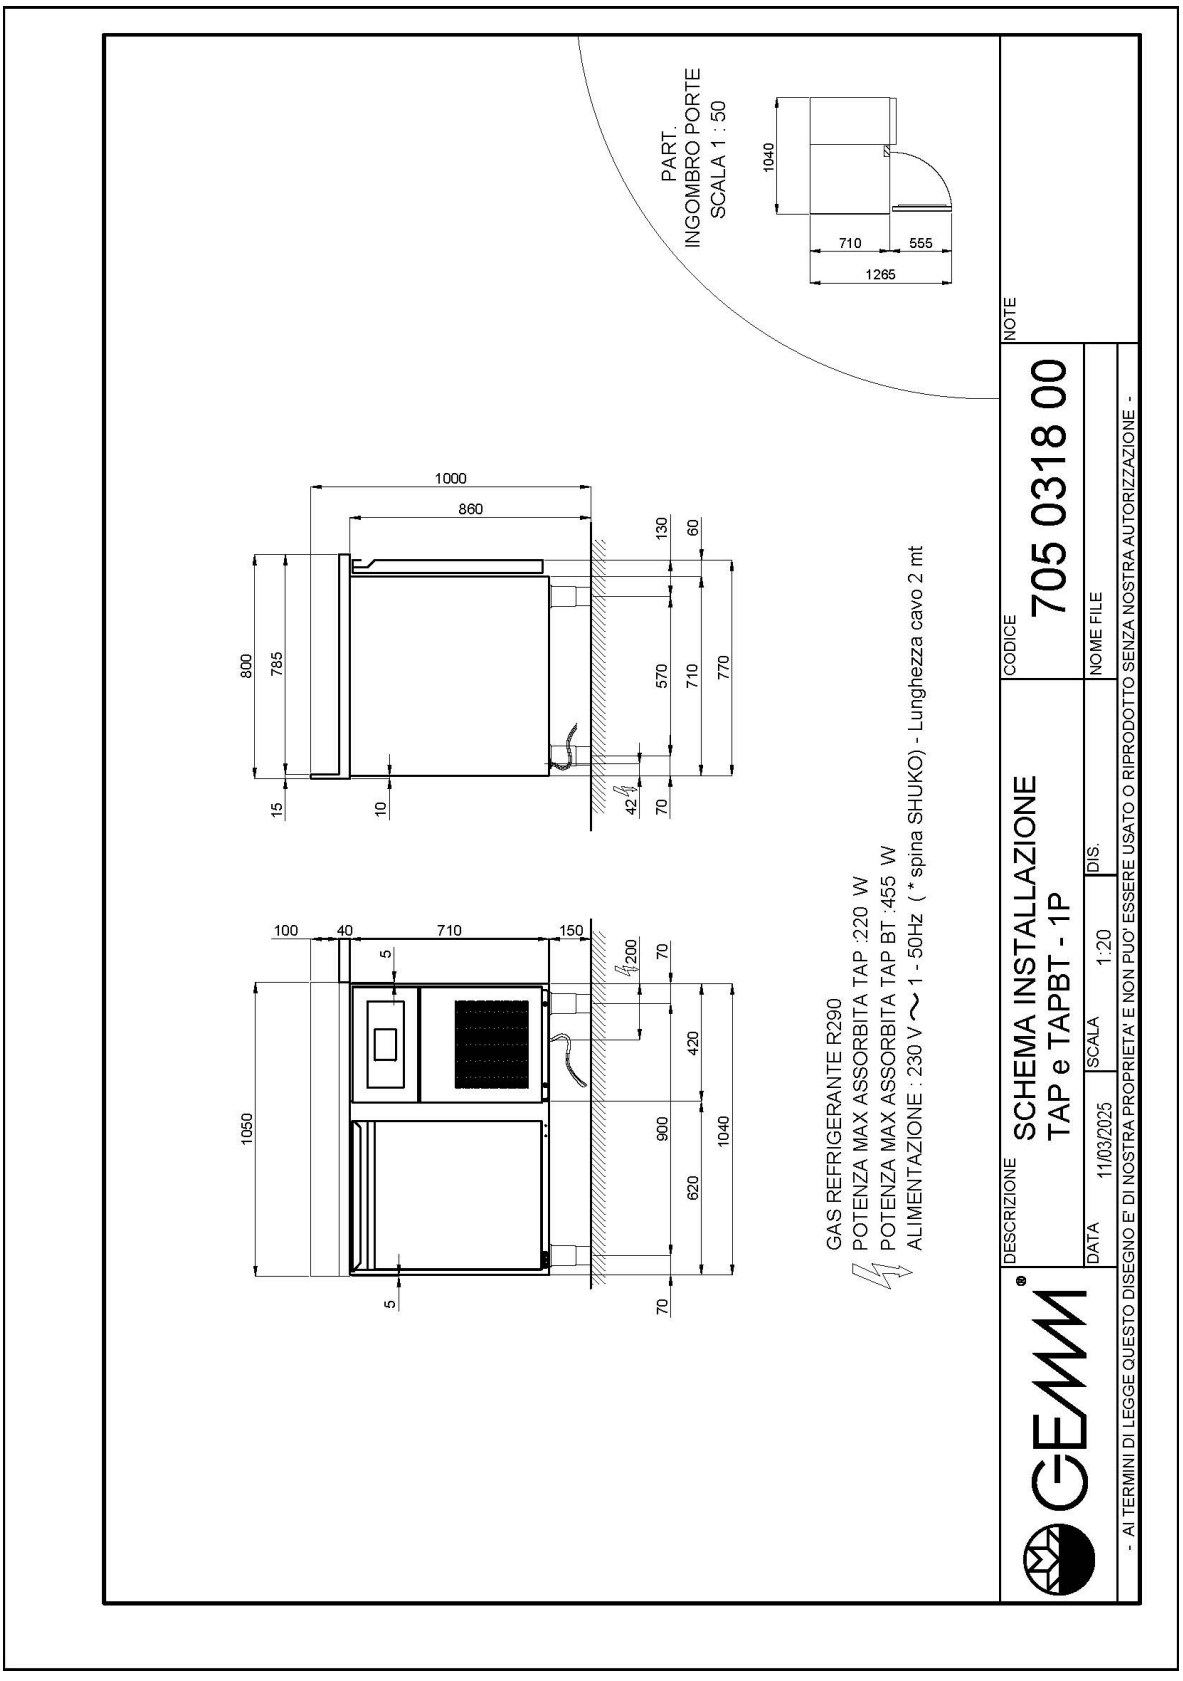

TAPBT/10A

ECOLABEL:

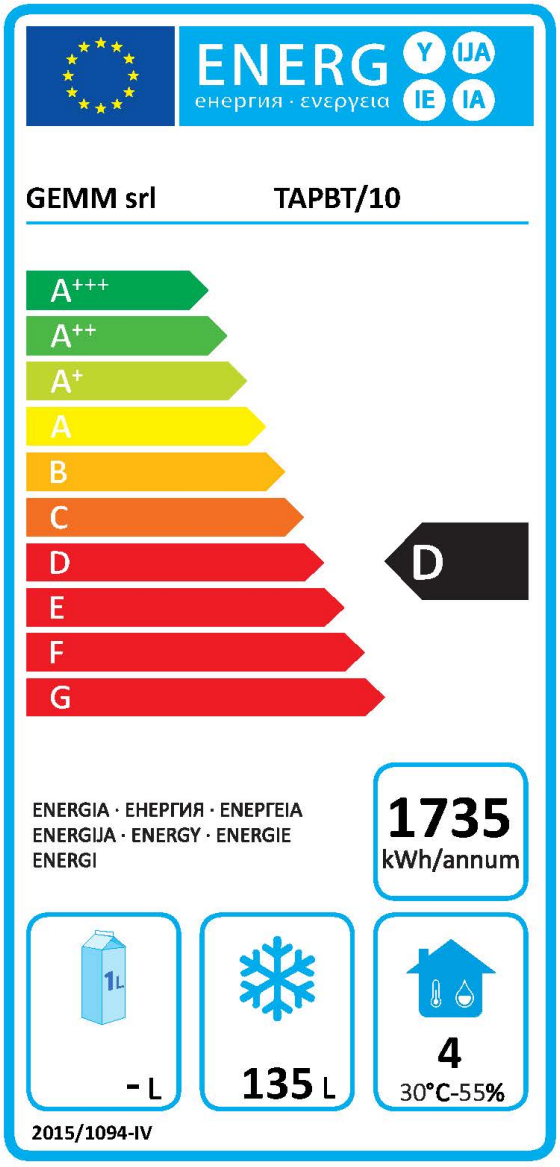
ENERG
енергия · ενεργεια
Y
IJA
IE
IA
GEMM srl
TAPBT/10
A+++
A++
A+
A
B
C
D
E
F
G
D
ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ
ENERGIJA · ENERGY · ENERGIE
ENERGI
1735
kWh/annum
1L
- L
135 L
4
30°C-55%
2015/1094-IV