

PASTRY

600x400 COUNTERS

Model: TAPNBT/07S


Code: 42040090

LABOR

EN PREARRANGED FREEZER COUNTER - Freezer pastry counter suitable for 600x400 trays.

- Construction: made in stainless steel
- Supplied with thermostatic valve (R452A)
- Internal capacity: 600x400 mm racks
- Position of technical compartment: on right side
- Refrigeration type: refrigeration system HSS "Helped Static System"
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: manual tray
- Optional equipment: drawer units
- Supply with: 7 pair of runners
- Not included: condensing unit













Technical Data:


Body Height	mm	710
Doors	nr	1
Capacity (net)	l	135
Capacity (gross)	l	195
Capacity of trays/shelves	mm	7 600x400
External dimensions (WxDxH)	cm	74 x 77 x 86
Insulation thickness	mm	50
Tray pitch	mm	75
Rack positions	nr	7
Top type		without work top
Evaporators	nr	1
Standard lock		NO
Standard light		NO
Temperature	°C	-15/-20°C
Condensing unit		remote condensing unit
Gas		R452A
Ventilation control		NO
Humidity control		NO
Max abs. power	W	275*
Cooling power	W	485**
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	136 x 96 x 110
Volume (gross)	mc	1,44
Net weight	kg	35
Gross weight	kg	50

*Evap. -10°C, Cond. +45°C / **Evap. -23,3 Cond. +54,4°C

ACCESSORIES:

	Condensing unit 5/8 HP for 1-2 doors freezer counter	40200600
	Tray for automatic elimination of condensate water	40200185
	Rilsan cm 60x40 shelf	45020550
	Pair of runners for 60x40 cm trays	20808031
	Stainless steel cm 40x60x2h tray	42000560
	Stainless steel cm 40x60x3h tray	42000562
	Set of no. 4 Ø 125 castors	40200530
	LED light for 1 door (counter), overprice	40203005
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

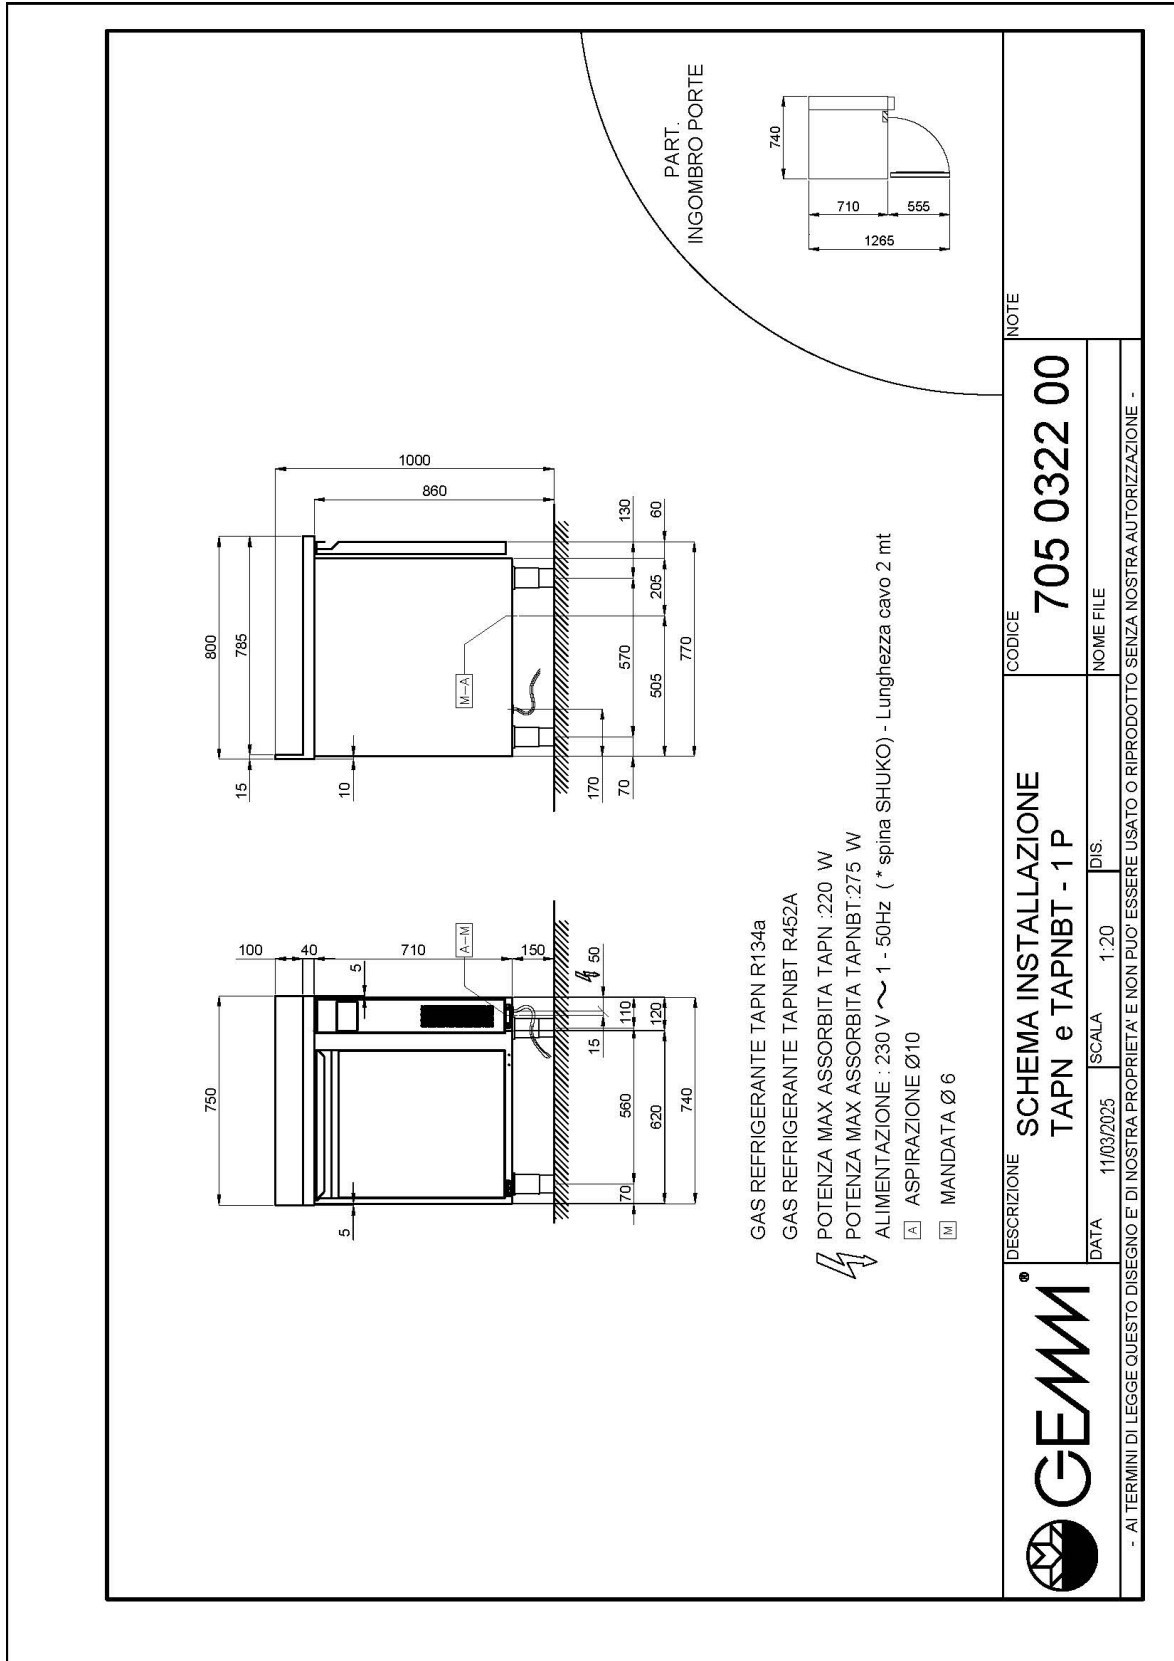

TAPNBT/07S