

## PASTRY

**600x400 COUNTERS**


**Model: TAPNBT/24A    Code: 42040122**

*LABOR*

EN PREARRANGED FREEZER COUNTER - Freezer pastry counter suitable for 600x400 trays.

- Construction: made in stainless steel
- Supplied with thermostatic valve (R452A)
- Internal capacity: 600x400 mm racks
- Position of technical compartment: on right side
- Refrigeration type: refrigeration system HSS "Helped Static System"
- Control board panel: 2.8" touch control panel, digital display
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: manual tray
- Optional equipment: drawer units
- Supply with: 7 pair of runners each door
- Not included: condensing unit






## Technical Data:

|                               |    |                          |
|-------------------------------|----|--------------------------|
| Body Height                   | mm | 710                      |
| Doors                         | nr | 4                        |
| Capacity (net)                | l  | 404                      |
| Capacity (gross)              | l  | 605                      |
| Capacity of trays/shelves     | mm | 28 600x400               |
| External dimensions (WxDxH)   | cm | 235 x 80 x 100           |
| Insulation thickness          | mm | 50                       |
| Tray pitch                    | mm | 75                       |
| Rack positions                | nr | 7                        |
| Stainless steel top thickness | mm | 15/10 H 40               |
| Top type                      |    | AISI 304 with backsplash |
| Evaporators                   | nr | 2                        |
| Standard lock                 |    | NO                       |
| Standard light                |    | NO                       |
| Temperature                   | °C | -15/-20°C                |
| Condensing unit               |    | remote condensing unit   |
| Gas                           |    | R452A                    |
| Ventilation control           |    | NO                       |
| Humidity control              |    | NO                       |
| Max abs. power                | W  | 795*                     |
| Cooling power                 | W  | 930**                    |
| Input voltage                 |    | 1x230V ~ 50Hz            |
| Climate class                 |    | 5                        |
| Packaging dimensions (WxDxH)  | cm | 278 x 96 x 110           |
| Volume (gross)                | mc | 2,94                     |
| Net weight                    | kg | 164                      |
| Gross weight                  | kg | 179                      |

\*Evap. -10°C, Cond. +45°C / \*\*Evap. -23,3 Cond. +54,4°C

## INSTALLATION DIAGRAM:

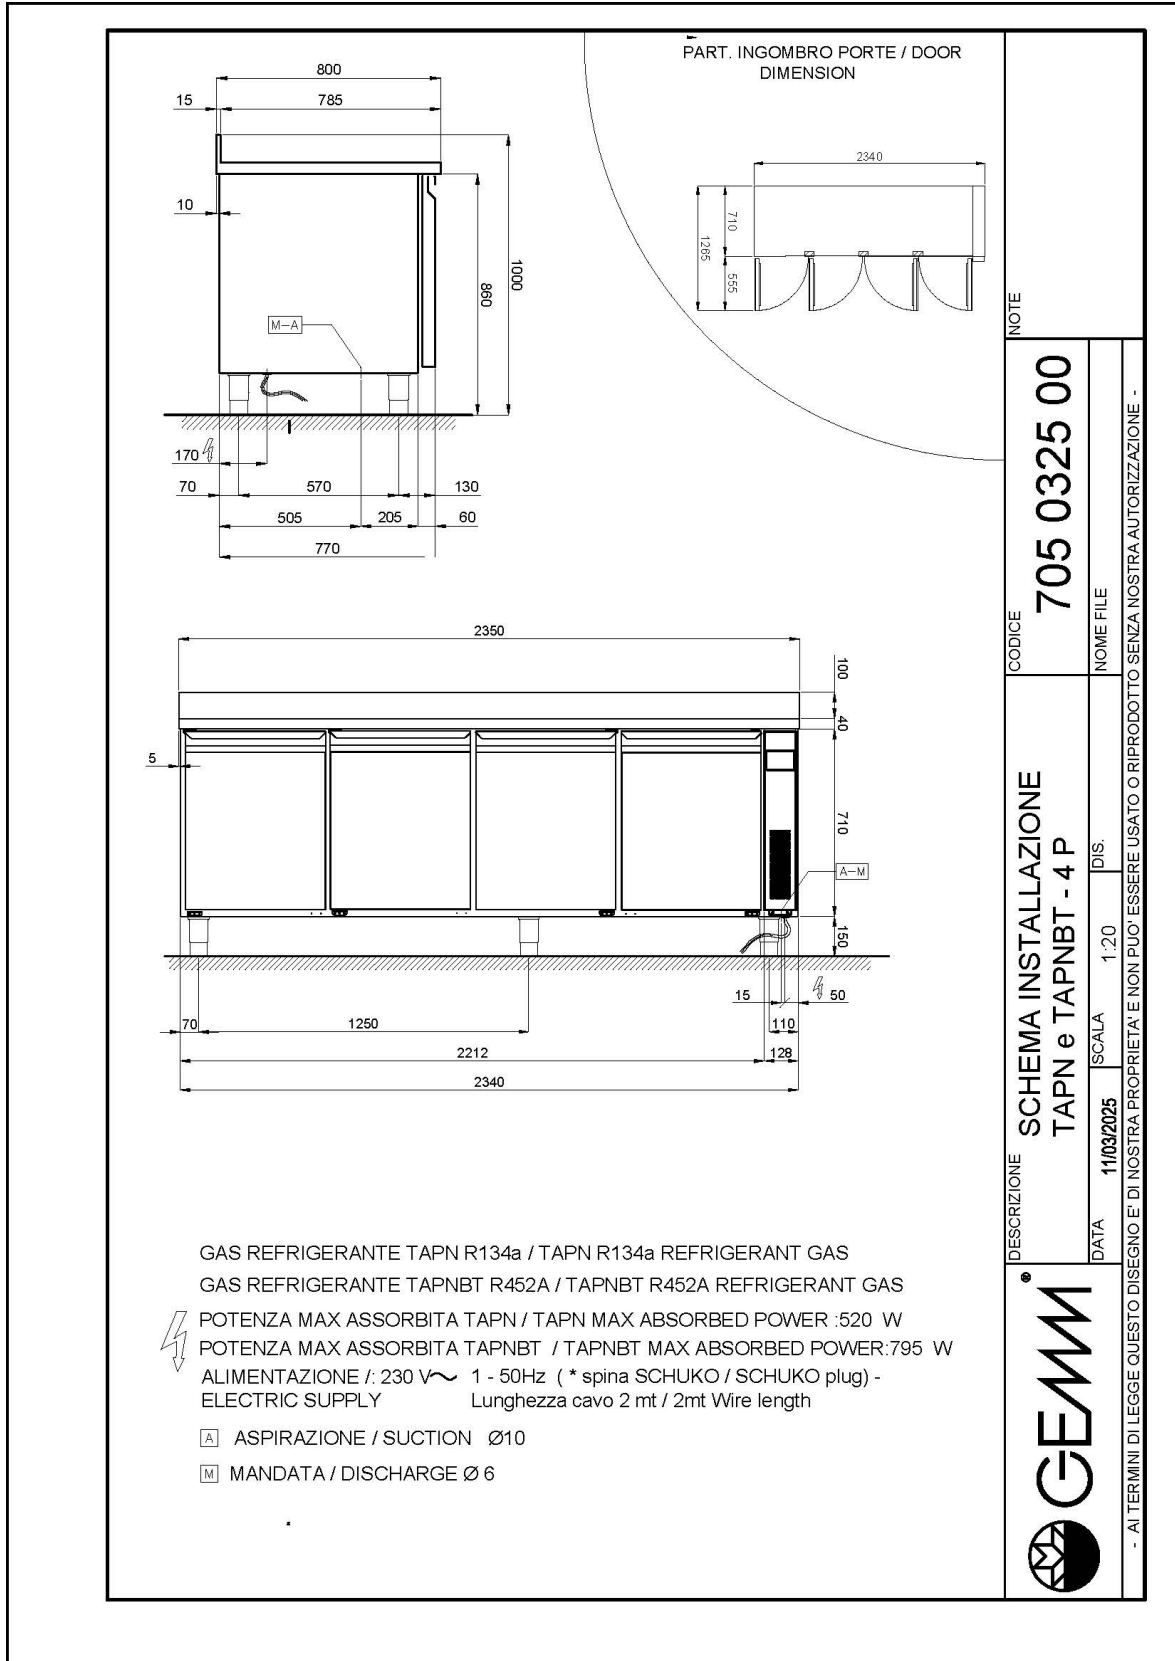

TAPNBT/24A