

## RETARDER PROOFING

**600x400 COUNTERS**

**Model: TALH/21S**


**Code: 42502020**

*PLANET*

RETARDER PROVER COUNTER WITH HUMIDITY CONTROL - Retarder-prover counter suitable for 600x400 containers/trays with humidity control.

- Construction: made in stainless steel
- Multifunction and multilingual
- Internal capacity: 600x400 mm trays
- Position of technical compartment: on right side
- Refrigeration type: refrigeration system HSS "Helped Static System"
- Control board panel: 5" TOUCH screen control board
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Supply with: 7 pair of runners each door





## Technical Data:

Body Height	mm	710
Doors	nr	3
Capacity (net)	l	404
Capacity (gross)	l	605
Capacity of trays/shelves	mm	21 600x400
External dimensions (WxDxH)	cm	209 x 77 x 86
Insulation thickness	mm	50
Tray pitch	mm	75
Rack positions	nr	7
Top type		without work top
Evaporators	nr	1
Standard lock		NO
Standard light		NO
Temperature	°C	-2/+35°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		NO
Humidity control		NO
Relative humidity	ur%	60-90%
Max abs. power	W	1100***
Cooling power	W	650*
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	225 x 96 x 110
Volume (gross)	mc	2,38
Net weight	kg	175
Gross weight	kg	190

\*Evap. -10°C, Cond +45°C / \*\*\* Heating

## DETAILS:



Stainless steel cm 40x60 tray



The stainless steel h 40 mm worktops are reinforced and made with 15/10 sheet metal



Humidity control with electronic probe




Ecological gas (R290)



5" TOUCH electronic board



Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

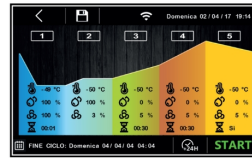

Automatic work cycle



Manual work cycle

## ACCESSORIES:



Rilsan cm 60x40 shelf

45020550



Pair of runners for 60x40 cm trays

20808031



Stainless steel cm 40x60x2h tray

42000560

Stainless steel cm 40x60x3h tray

42000562



Set of no. 6 Ø 125 castors

40200532



Wi-Fi supervising system for AFLV, BCT (overprice)


45000563



60Hz frequency

40200560

## INSTALLATION DIAGRAM:

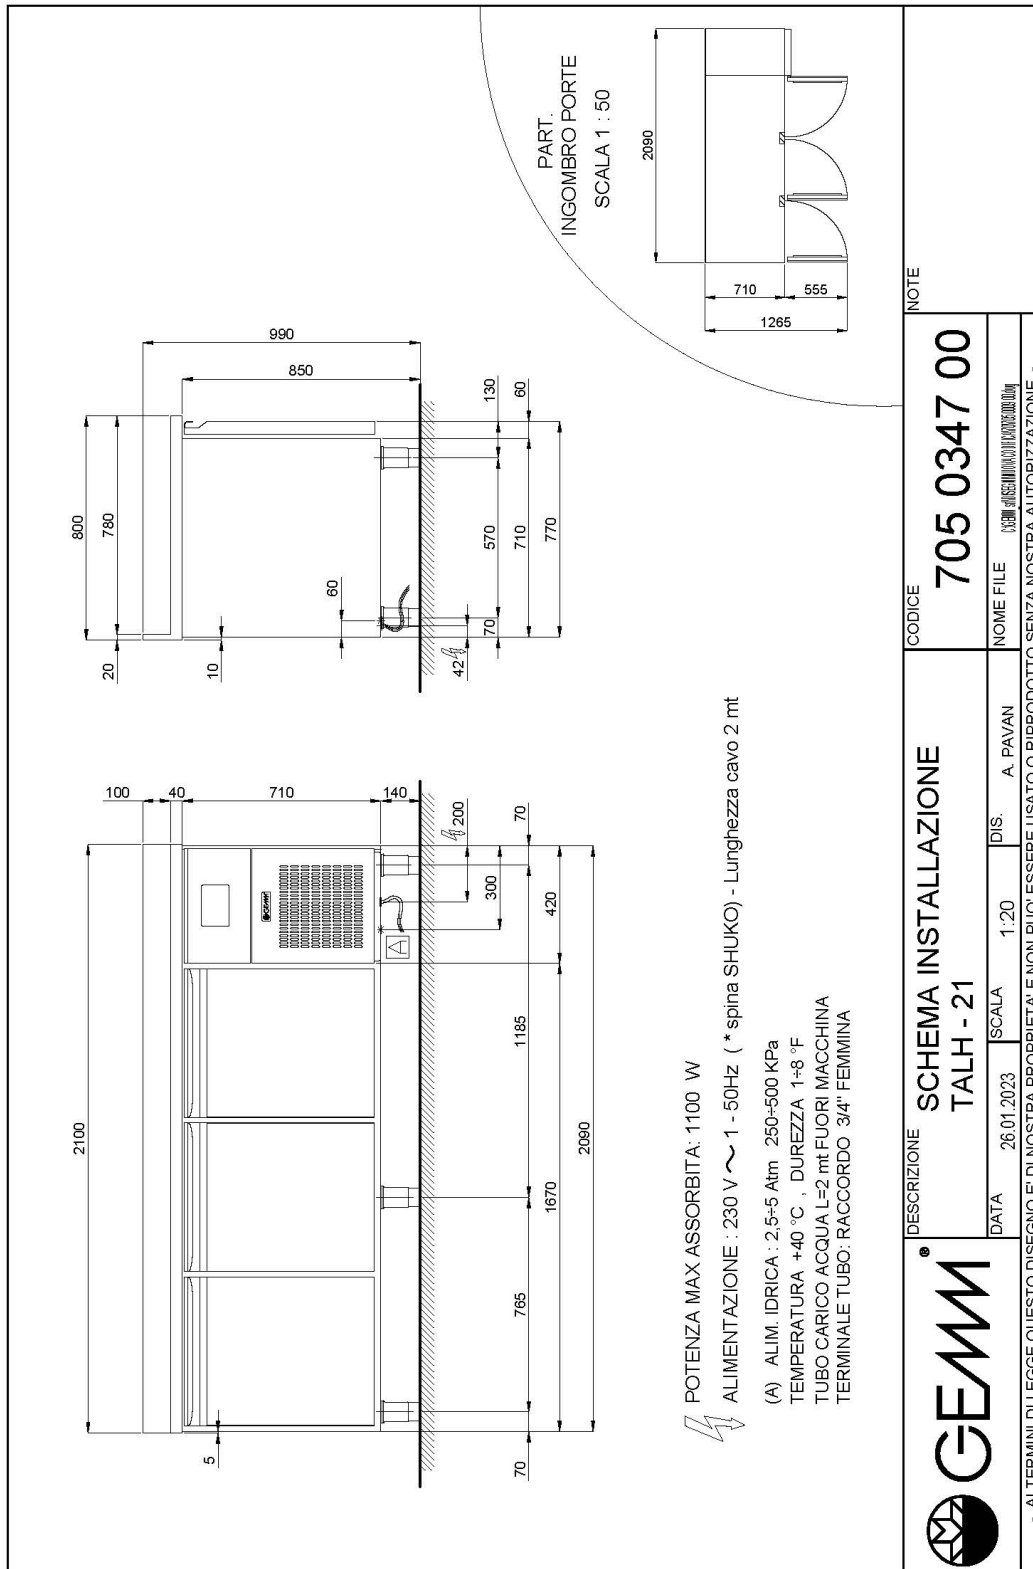

TALH/21S