RETARDER PROOFING

600x400 COUNTERS **Model: TALH/27A** **Code: 42502032**

PLANET

RETARDER PROVER COUNTER WITH HUMIDITY CONTROL - Retarder-prover counter suitable for 600x400 containers/trays with humidity control.

- Construction: made in stainelss steel
- Multifunction and multilingual
- Internal capacity: 600x400 mm trays
- Position of technical compartment: on right side
- Refrigeration type: refrigeration system HSS "Helped Static System"
- Control board panel: 5" TOUCH screen control board
- Prearranged to be installed on plinth
- Defrosting system: automatic with heating elements
- Evaporation of condensation water: automatic
- Supply with: 7 pair of runners each door



Technical Data:

Body Height	mm	710
Doors	nr	4
Capacity (net)	l	539
Capacity (gross)	l	822
Capacity of trays/shelves	mm	28 600x400
External dimensions (WxDxH)	cm	265 x 80 x 100
Insulation thickness	mm	50
Tray pitch	mm	75
Rack positions	nr	7
Stainless steel top thickness	mm	15/10 H 40
Top type		AISI 304 with backsplash
Evaporators	nr	2
Standard lock		NO
Standard light		NO
Temperature	°C	-2/+35°C
Condensing unit		plug-in unit
Gas		R290
Ventilation control		YES
Humidity control		YES
Relative humidity	ur%	60-90%
Max abs. power	W	1100***
Cooling power	W	650*
Input voltage		1x230V ~ 50Hz
Climate class		5
Packaging dimensions (WxDxH)	cm	278 x 96 x 110
Volume (gross)	mc	2,94
Net weight	kg	292
Gross weight	kg	307


*Evap. -10°C, Cond +45°C / *** Heating

CONTROL PANEL

- Programming and managing the proofing cycle is extremely easy and precise thanks to the 7" multifunction touch electronic control board. Intuitive and user-friendly, it allows you to set the phases of cooling, storage, warming, proofing, and holding, with the option to store up to 100 work programs and select from 7 languages.

The electronic board ensures an ideal climate for any type of product by controlling temperature and relative humidity. It also provides immediate diagnostics through constant monitoring and

display of operating parameters.

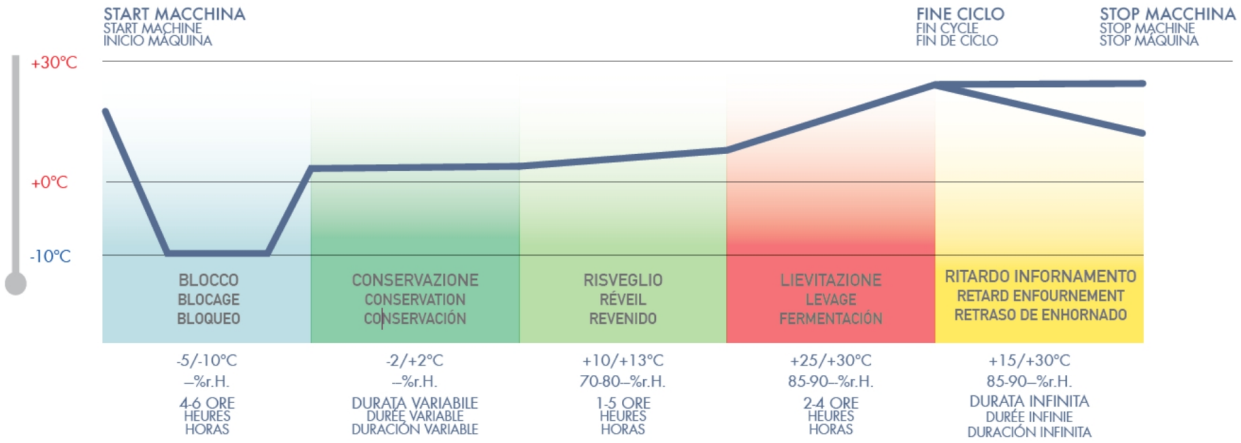

DETAILS:



Stainless steel h 40 mm worktops reinforced and made with 15/10 sheet metal



Stainless steel cm 40x60 tray




Ecological gas (R290)

Remote monitoring system via GEMM-Cloud Wi-Fi connection (on request)

ACCESSORIES:

	Rilsan cm 60x40 shelf	45020550
	Pair of runners for 60x40 cm trays	20808031
	Pair of runners for 60x40 cm trays	20808031
	Stainless steel cm 40x60x2h tray	42000560
	Stainless steel cm 40x60x3h tray	42000562
	Set of no. 6 Ø 125 castors	40200532
	Wi-Fi supervising system for AFLV, BCT (overprice)	45000563
	60Hz frequency	40200560

INSTALLATION DIAGRAM:

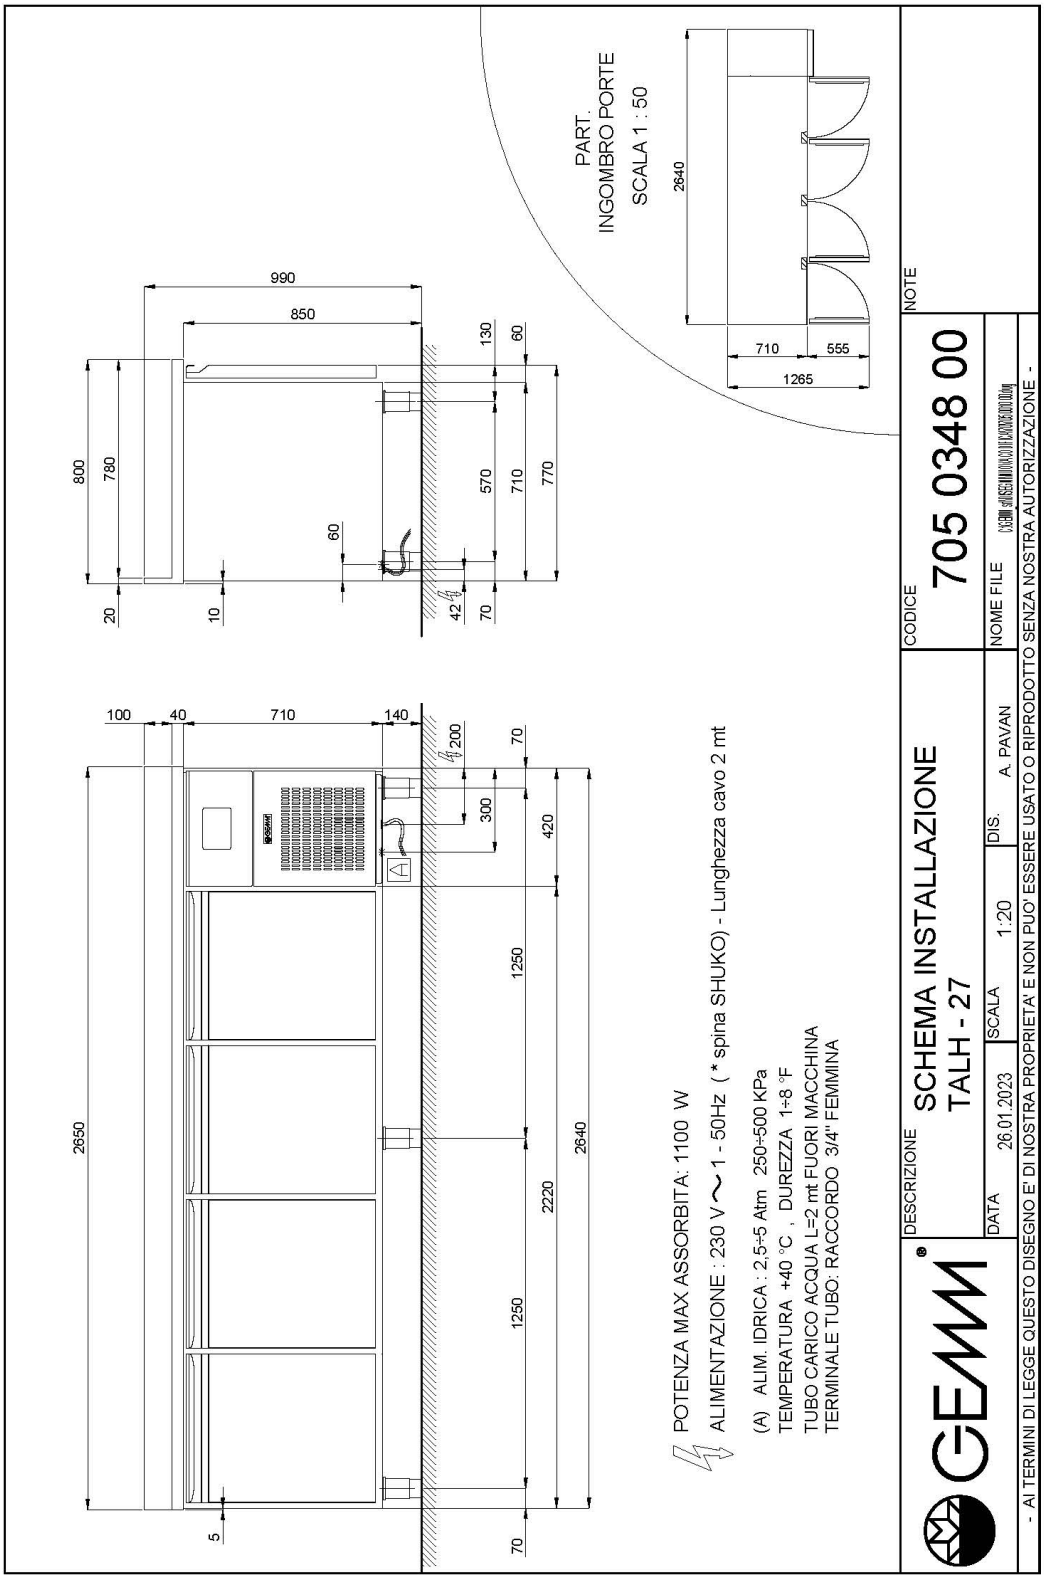

TALH/27A