

PROFESSIONAL KITCHENS

CABINETS FOR PROFESSIONAL KITCHENS

Model: XPN/70


Code: 45000260

SPACE PLUS

GN 2/1 POSITIVE DEEP-DRAWN INTERNAL SIDES
CABINET - Refrigerated upright cabinet with deep-drawn internal sides for GN 2/1 racks, 55 mm pitch for 24 positions and complete with door lock with key and led light. Prearranged for remote condensing unit with valve system on request.

- Construction: made in stainless steel
- deep-drawn internal sides
- Internal capacity: GN 2/1 racks
- Position of technical compartment: on top
- Refrigeration type: ventilated cooling system
- Control board panel: 2.2" touch control panel, digital display
- prearranged to be installed on plinth
- Defrosting system: automatic defrosting system defrosting system with hot gas
- Evaporation of condensation water: automatic condensate evaporation
- Optional equipment: prearranged for remote system (R452A gas valve)
- Supply with: 3 GN 2/1 shelves





Technical Data:


Doors	nr	1
Capacity (net)	l	435
Capacity (gross)	l	558
External dimensions (WxDxH)	cm	72 x 91 x 209
Insulation thickness	mm	95
Tray pitch	mm	55
Rack positions	nr	24
Standard lock		YES
Standard light		YES
Temperature	°C	-2/+8°C
Condensing unit		plug-in unit
Gas		R600a
Ventilation control		NO
Humidity control		NO
Max abs. power	W	185*
Cooling power	W	370*
Input voltage		1x230V ~ 50Hz
Energy efficiency class		A
Energy consumption kWh/24h	kWh/24h	0,89
Energy consumption kWh/year	kWh/year	325
Energy efficiency index		0,89
Climate class		5
Volume (gross)	mc	1,78
Net weight	kg	131
Gross weight	kg	156

*Evap. -10°C, Cond +45°C

ACCESSORIES:

	GN 2/1 shelf	45000500
	GN 2/1 stainless steel shelf	45000515
	Pedal for single door	45000530
	Set of Ø 100 castors	45000540
	Wi-Fi supervising system (overprice)	45000565
	60Hz frequency	40200560
	Prearranged version with valve system for normal temperature equipment (deduction)	

INSTALLATION DIAGRAM:

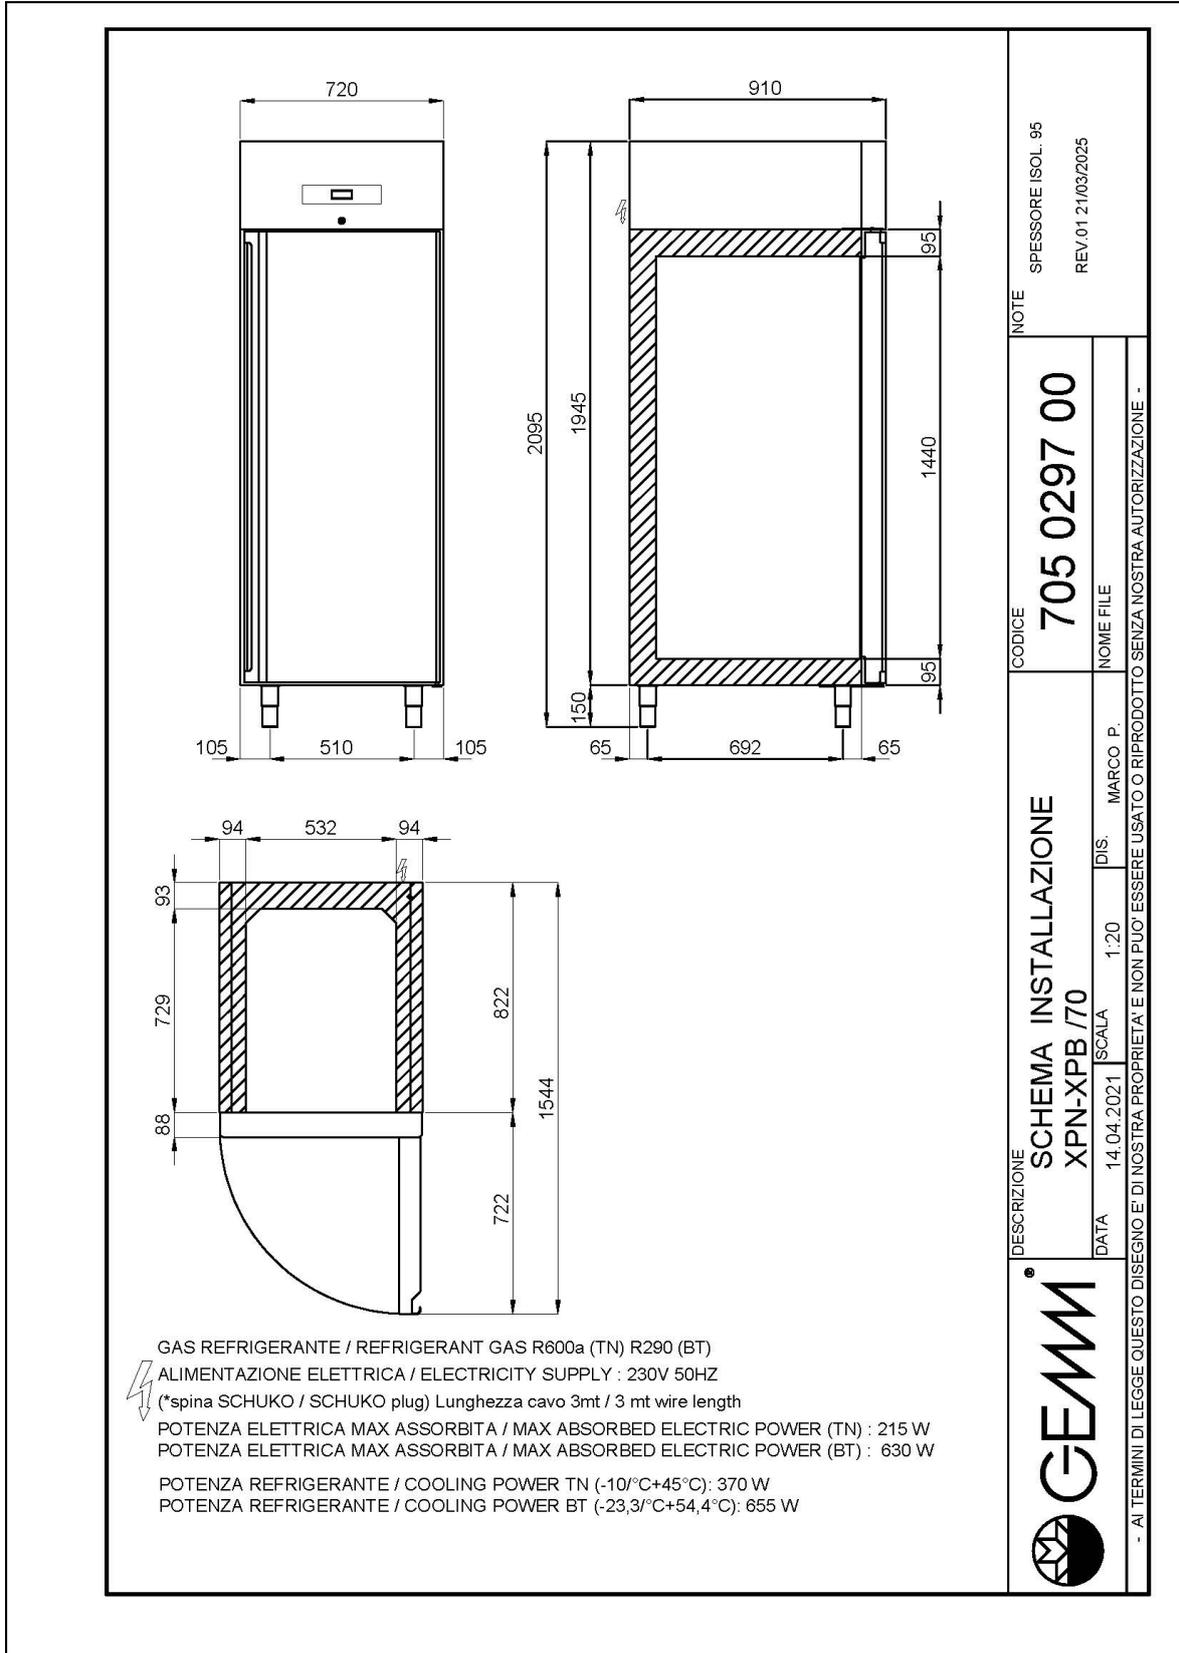

XPN/70

ECOLABEL:

